




REACH & RoHS  
COMPLIANT




TOP VIEW




FRONT VIEW



RIGHT SIDE VIEW



BOTTOM VIEW

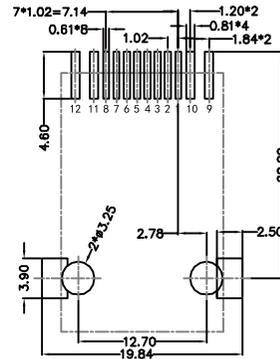

RECOMMENDED PCB LAYOUT  
VIEWED FROM COMPONENT SIDE

**MATERIAL:**

HOUSING: LCP,UL94V-0,BLACK.  
TERMINALS BRACKET: LCP,UL94V-0,BLACK.  
SHIELD: C2680,T=0.20MM,NICKEL PLATING ON ALL AREA.  
TERMINAL: PHOSPHOR BRONZE C5210,T=0.35MM,  
6U" GOLD PLATING ON CONTACT AREA.

**MECHANICAL:**

DURABILITY: 750 CYCLES MIN.  
MATING FORCE: 23N MAX.  
OPERATING TEMPERATURE: -40°C~+85°C.  
STORAGE TEMPERATURE: -40°C~+85°C.  
ALL CRITICAL DIMENSIONS WITH "\*"

**VOOHU** 苏州沃虎电子科技有限公司  
Su Zhou Voohu Electronic Tech.Co.Ltd

TITLE:  
TAB-UP 1X1 100BASE 贴片

SIZE  
A4  
UNITS  
MM[INCH]

GENERAL TOLERANCES  
UNLESS SPECIFIED

APPROVED BY:  
Geoffrey.Song

PART NO.:  
SYT311B093AA2A7S009

SACLE  
1:1  
REV  
A0

$x \pm 0.35$   
 $.x \pm 0.30$

CHECKED BY:  
Elvis.Song

TEL: +86 400 1048 018

WEB: WWW.VOOHU.CN

REMARK:



SHEET  
1/3



$.xx \pm 0.25$   
 $.xxx \pm 0.10$

DESIGND BY:  
Sunny.Xu

REACH & RoHS  
COMPLIANT

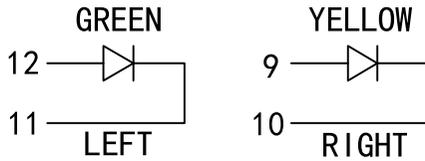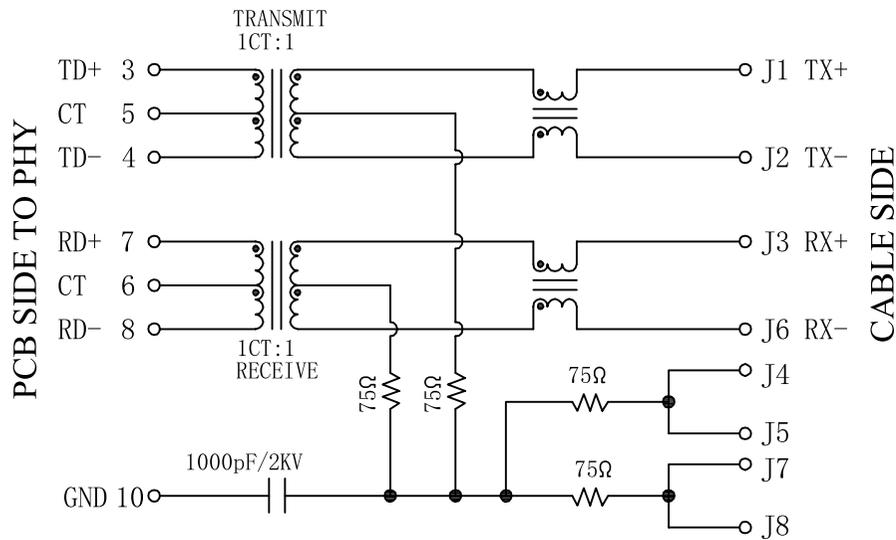

**Electrical:**

- Turn ratio: 1~2: J1~J2=1CT:1CT(±2%).  
5~6: J3~J6=1CT:1CT(±2%).
- OCL: 350uH Min. at 100KHz 100mV 8mA DC.
- Insertion Loss: -1.0 dB Max 1~100MHz.
- Return loss: -20dB Min 1~10MHz;  
-16dB Min 10~30MHz;  
-12dB Min 30~60MHz;  
-10dB Min 60~80MHz.
- Cross talk: -40dB Min 1~30MHz;  
-35dB Min 30~60MHz;  
-30dB Min 60~100MHz;
- CMR: -30dB Min 1~100MHz;
- Hi-Pot: 1500V AC & 2250V DC  
6S 1mA PRI TO SEC

**LED Specification**

Standard LED Color	LED Wavelength	Foward(A)	Foward(V)
Green	568nm	20mA	1.85-2.45V
Yellow	585nm	20mA	1.7-2.2V

**VOOHU** 苏州沃虎电子科技有限公司  
Su Zhou Voohu Electronic Tech.Co.Ltd

TITLE:  
TAB-UP 1X1 100BASE 贴片  
PART NO.:  
SYT311B093AA2A7S009

SIZE  
A4  
UNITS  
MM[INCH]  
SACLE  
1:1  
REV  
A0

GENERAL TOLERANCES  
UNLESS SPECIFIED  
x±0.35  
x°±3.0°  
.x±0.30  
.x°±2.0°  
.xx±0.25  
.xx°±1.5°  
.xxx±0.10  
.xxx°±1.0°

APPROVED BY:  
Geoffrey.Song  
CHECKED BY:  
Elvis.Song  
DESIGND BY:  
Sunny.Xu

TEL: +86 400 1048 018

WEB: WWW.VOOHU.CN


REMARK:

SHEET  
2/3



REACH & RoHS  
COMPLIANT

# PROFILE OF REFLOW SOLDERING

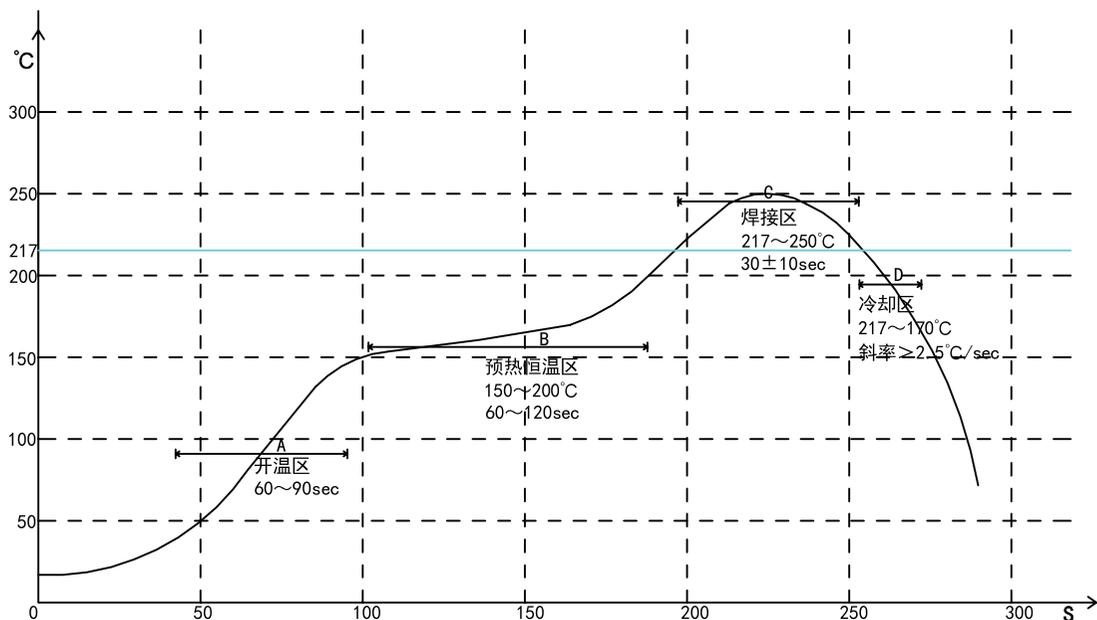

A. Temperature range of open  
 B. Preheat temperature zone  
 C. The welding zone  
 D. The cooling zone  
 Tip temperature: 265±5°C.  
 Tip temperature time: 30±10Sec.  
 Tip melting point of Sn96.5/Ag3/Cu0.5.

**VOOHU** 苏州沃虎电子科技有限公司  
 Su Zhou Voohu Electronic Tech.Co.Ltd

TITLE:  
 TAB-UP 1X1 100BASE 贴片

SIZE  
 A4

UNITS  
 MM[INCH]

GENERAL TOLERANCES  
 UNLESS SPECIFIED

APPROVED BY:  
 Geoffrey.Song

PART NO.:  
 SYT311B093AA2A7S009

SACLE  
 1:1

REV  
 A0

x±0.35  
 .x±0.30  
 .xx±0.25  
 .xxx±0.10

x°±3.0°  
 .x°±2.0°  
 .xx°±1.5°  
 .xxx°±1.0°

CHECKED BY:  
 Elvis.Song  
 DESIGND BY:  
 Sunny.Xu

TEL: +86 400 1048 018

WEB: WWW.VOOHU.CN

REMARK:

SHEET  
 3/3

