




REACH & RoHS  
COMPLIANT




TOP VIEW




LEFT SIDE VIEW

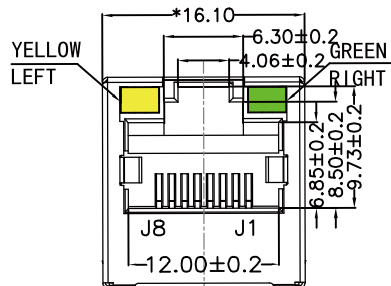


FRONT VIEW

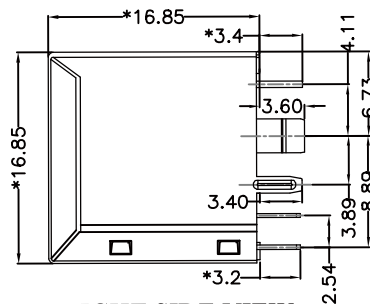


RIGHT SIDE VIEW



BACK VIEW



BOTTOM VIEW

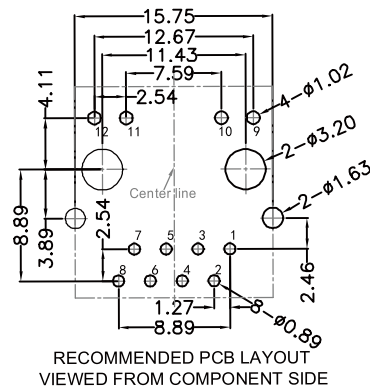

**MATERIAL:**

HOUSING: PBT,UL94V-0,BLACK.

TERMINALS BRACKET: PBT,UL94V-0,BLACK.

SHIELD: C2680,T=0.20MM,NICKEL PLATING ON ALL AREA.

TERMINAL: PHOSPHOR BRONZE C5210,T=0.35MM,  
6U" GOLD PLATING ON CONTACT AREA.

**MECHANICAL:**

DURABILITY: 750 CYCLES MIN.

MATING FORCE: 23N MAX.

OPERATING TEMPERATURE: -40°C~+85°C.

STORAGE TEMPERATURE: -40°C~+85°C.

ALL CRITICAL DIMENSIONS WITH "mm"

**VOOHU** 苏州沃虎电子科技有限公司  
Su Zhou Voohu Electronic Tech.Co.Ltd

TITLE:  
180° TAB-UP 1X1 100BASE

PART NO.:  
SYT511B048AA1A8D

REMARK:

SIZE  
A4

SACLE  
1:1

SHEET  
1/4

UNITS  
MM[INCH]

REV  
A0



GENERAL TOLERANCES  
UNLESS SPECIFIED

|                 |                            |
|-----------------|----------------------------|
| $x \pm 0.35$    | $x^\circ \pm 3.0^\circ$    |
| $.x \pm 0.30$   | $.x^\circ \pm 2.0^\circ$   |
| $.xx \pm 0.25$  | $.xx^\circ \pm 1.5^\circ$  |
| $.xxx \pm 0.10$ | $.xxx^\circ \pm 1.0^\circ$ |

APPROVED BY:  
Geoffrey.Song

CHECKED BY:  
Elvis.Song


DESIGND BY:  
Sunny.Xu

TEL: +86 400 1048 018

WEB: [WWW.VOOHU.CN](http://WWW.VOOHU.CN)


REACH & RoHS  
COMPLIANT

Suggested Panel Opening:

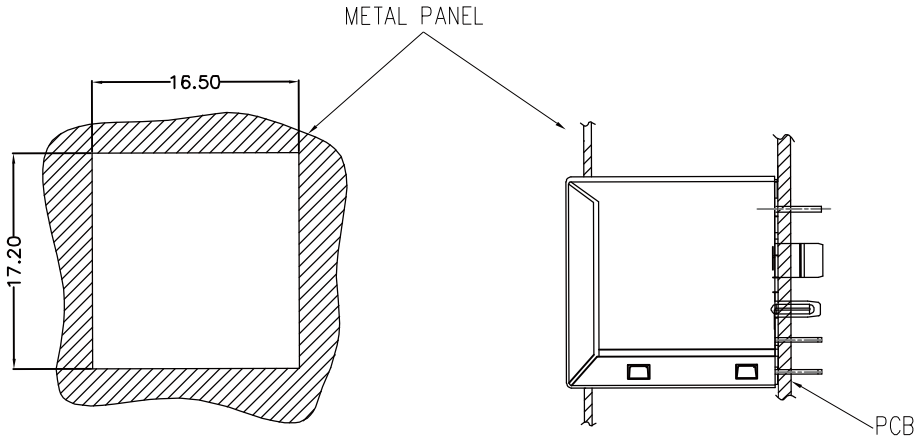

UNIT: mm / inch  
Tolerances:  $\pm 0.10$  / 0.004

Keep-Out Area (Component Side View):

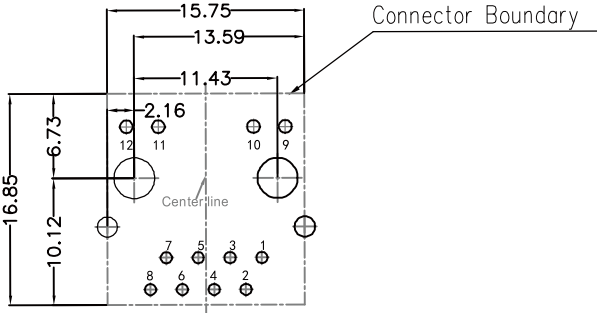

UNIT: mm / inch  
Tolerances:  $\pm 0.10$  / 0.004

**VOOHU** 苏州沃虎电子科技有限公司  
Su Zhou Voohu Electronic Tech.Co.Ltd

TEL: +86 400 1048 018

WEB: [WWW.VOOHU.CN](http://WWW.VOOHU.CN)

TITLE:  
180° TAB-UP 1X1 100BASE

PART NO.:  
SYT511B048AA1A8D


REMARK:

SIZE  
A4  
UNITS  
MM[INCH]

SACLE  
1:1

SHEET  
2/4

REV  
A0



GENERAL TOLERANCES  
UNLESS SPECIFIED



|                 |                            |
|-----------------|----------------------------|
| $x \pm 0.35$    | $x^\circ \pm 3.0^\circ$    |
| $.x \pm 0.30$   | $.x^\circ \pm 2.0^\circ$   |
| $.xx \pm 0.25$  | $.xx^\circ \pm 1.5^\circ$  |
| $.xxx \pm 0.10$ | $.xxx^\circ \pm 1.0^\circ$ |

APPROVED BY:  
Geoffrey.Song

CHECKED BY:  
Elvis.Song

DESIGND BY:  
Sunny.Xu

REACH & RoHS  
COMPLIANT

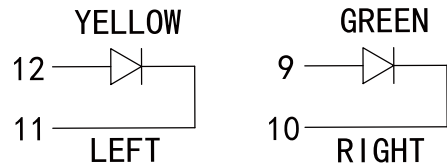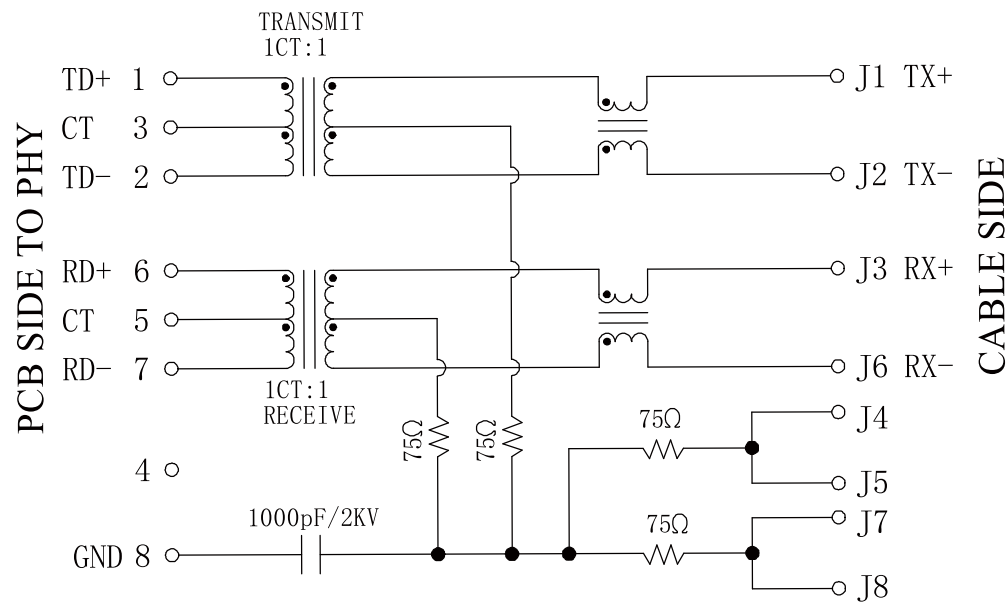

### Electrical:

- Turn ratio:1~2:J1~J2=1CT:1CT(±2%).  
6~7:J3~J6=1CT:1CT(±2%).
- OCL:350uH Min.at 100KHz 100mV 8mA DC.
- Insertion Loss: -1.0 dB Max 1~100MHz.
- Return loss: -20dB Min 1~10MHz;  
-16dB Min 10~30MHz.  
-12dB Min 30~60MHz.  
-10dB Min 60~80MHz.
- Cross talk: -40dB Min 1~30MHz;  
-35dB Min 30~60MHz;  
-30dB Min 60~100MHz;
- CMR: -30dB Min 1~100MHz;
- Hi-Pot:1500V AC & 2250V DC  
6S 1mA PRI TO SEC

### LED Specification

| Standard LED Color | LED Wavelength | Foward(A) | Foward(V)  |
|--------------------|----------------|-----------|------------|
| Green              | 568nm          | 20mA      | 1.85-2.45V |
| Yellow             | 585nm          | 20mA      | 1.7-2.2V   |

TITLE:  
180° TAB-UP 1X1 100BASE

PART NO.:  
SYT511B048AA1A8D

REMARK:


SIZE  
A4

SACLE  
1:1

SHEET  
3/4

UNITS  
MM[INCH]

REV  
A0



GENERAL TOLERANCES  
UNLESS SPECIFIED

|           |            |
|-----------|------------|
| x±0.35    | x°±3.0°    |
| .x±0.30   | .x°±2.0°   |
| .xx±0.25  | .xx°±1.5°  |
| .xxx±0.10 | .xxx°±1.0° |

APPROVED BY:  
Geoffrey.Song

CHECKED BY:  
Elvis.Song

DESIGND BY:  
Sunny.Xu


**VOOHU** 苏州沃虎电子科技有限公司  
Su Zhou Voohu Electronic Tech.Co.Ltd

TEL: +86 400 1048 018

WEB: [WWW.VOOHU.CN](http://WWW.VOOHU.CN)

REACH & RoHS  
COMPLIANT

# PROFILE OF WAVE SOLDER

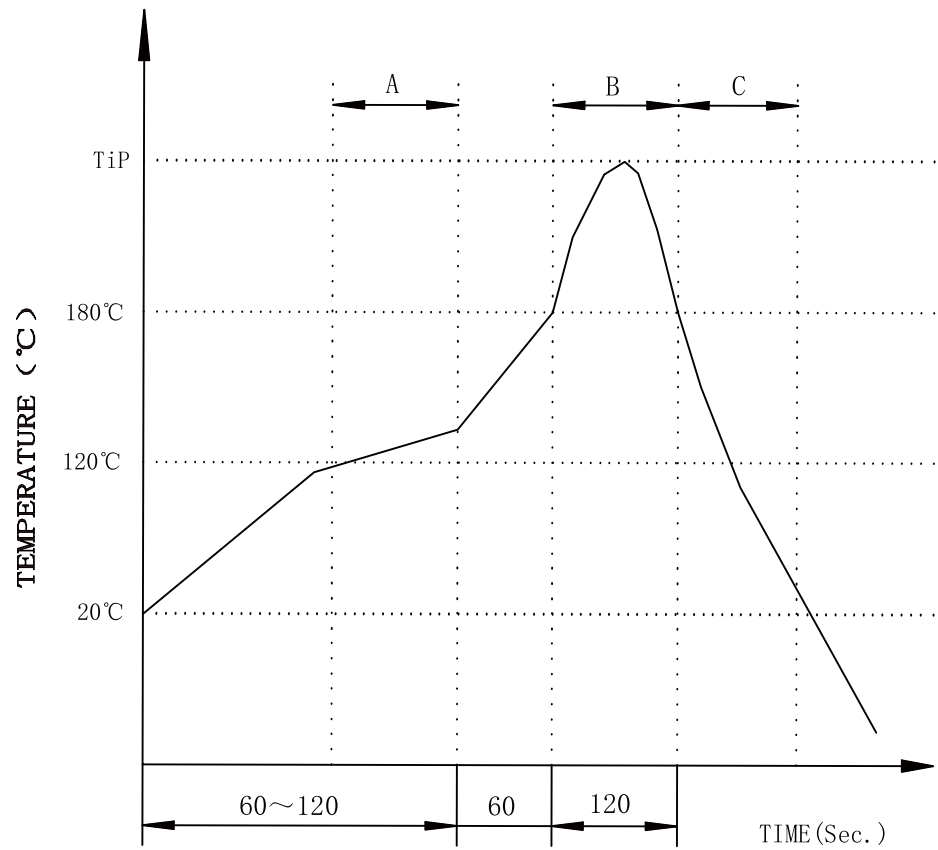

A.Preheating B.Soldering C.Gradual Cooling  
Tip temperature:260±5°C.  
Tip temperature time:5Sec Max.  
Tip melting point of Sn96.5/Ag3/Cu0.5:217°C.

Remarks: after wave soldering, the plastic  
positioning columns of the product which under the  
PCB will be slightly melted, but it won't affect its  
function.

**VOOHU** 苏州沃虎电子科技有限公司  
Su Zhou Voohu Electronic Tech.Co.Ltd

TEL: +86 400 1048 018

WEB: [WWW.VOOHU.CN](http://WWW.VOOHU.CN)

TITLE:  
180° TAB-UP 1X1 100BASE

PART NO.:  
SYT511B048AA1A8D

REMARK:


SIZE  
A4

SACLE  
1:1

SHEET  
4/4

UNITS  
MM[INCH]

REV  
A0



GENERAL TOLERANCES  
UNLESS SPECIFIED

|           |            |
|-----------|------------|
| x±0.35    | x°±3.0°    |
| .x±0.30   | .x°±2.0°   |
| .xx±0.25  | .xx°±1.5°  |
| .xxx±0.10 | .xxx°±1.0° |

APPROVED BY:  
Geoffrey.Song

CHECKED BY:  
Elvis.Song

DESIGND BY:  
Sunny.Xu