
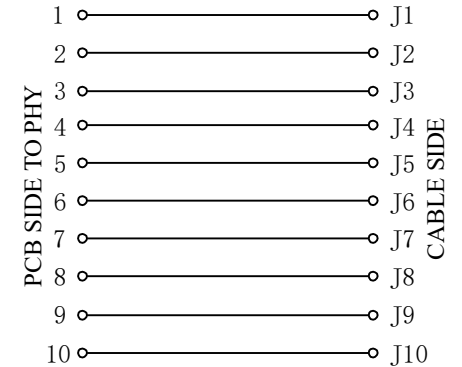
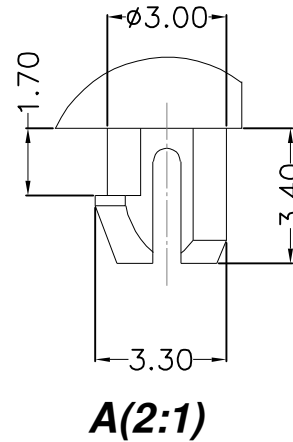
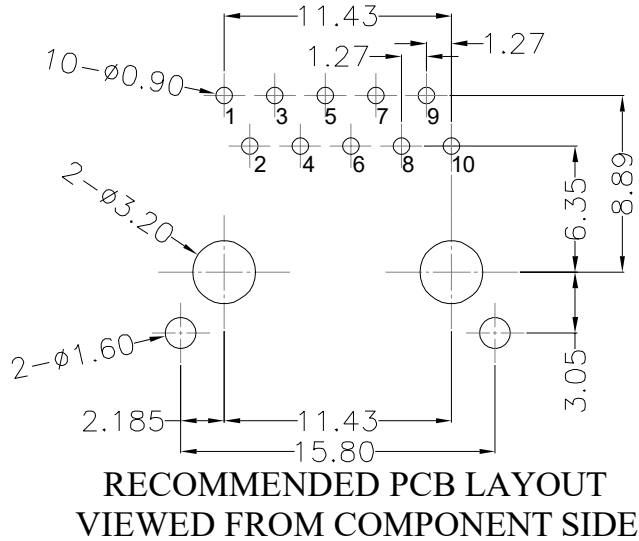
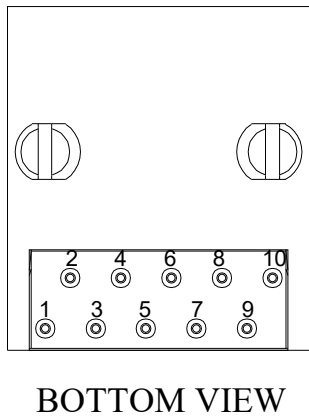
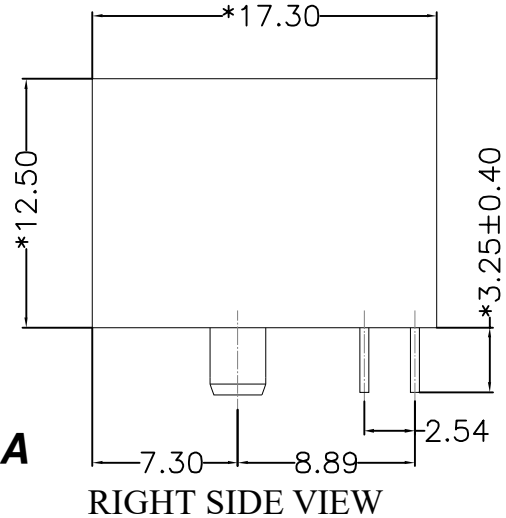


REACH & RoHS  
COMPLIANT

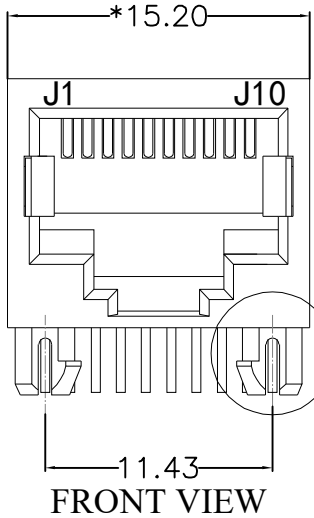

**MATERIAL:**

HOUSING: PBT,UL94V-0,BLACK.

TERMINAL: PHOSPHOR BRONZE  $\varnothing=0.46\text{MM}$ , G/FU" GOLD PLATING.

**MACHANICAL:**

DURABILITY: 750 CYCLES MIN,12.5MM/MINUTE.

INSERTION FORCE: 2.2KG.F MAX.

RETENTION STRENGTH : 7.7KG.F BETWEEN JACK AND PLUG.

OPERATING TEMPERATURE:  $-40^{\circ}\text{C}\sim+85^{\circ}\text{C}$ .

STORAGE TEMPERATURE:  $-40^{\circ}\text{C}\sim+85^{\circ}\text{C}$ .

ALL CRITICAL DIMENSIONS WITH "\*"

**ELECTRICAL:**

VOLTAGE: 125 VOLTS AC.

CURRENT RATING : 1.5AMP.

DIELECTRIC STRENGTH: 1000 VAC RMS 50HZ OR 60HZ,1MIN.

INSULATION RESISTANCE: 500 MEGA OHMS MIN. INITIAL

AFTER 500V DC FOR 1 MINUTE.

CONTACT RESISTANCE: SINGLE TERMINAL 30 MILLIOHMS MAX.

INITIAL 50 MILLIOHMS MAX. AFTER

DURABILITY TEST.

**VOOHU** 苏州沃虎电子科技有限公司  
Su Zhou Voohu Electronic Tech.Co.Ltd

TITLE:  
5621 1X1 10P10C 全塑

SIZE  
A4  
UNITS  
MM[INCH]

GENERAL TOLERANCES  
UNLESS SPECIFIED

APPROVED BY:  
Geoffrey.Song

PART NO.:  
SYT56211111IWA1DY1

SACLE  
1:1  
REV  
A0

$x\pm 0.35$   
 $.x\pm 0.30$

$x^{\circ}\pm 3.0^{\circ}$   
 $.x^{\circ}\pm 2.0^{\circ}$

CHECKED BY:  
Elvis.Song

TEL: +86 400 1048 018

WEB: WWW.WOHU-TEK.COM

REMARK:

SHEET  
1/1



$.xx\pm 0.25$   
 $.xxx\pm 0.10$

$.xx^{\circ}\pm 1.5^{\circ}$   
 $.xxx^{\circ}\pm 1.0^{\circ}$

DESIGND BY:  
Sunny.Xu