
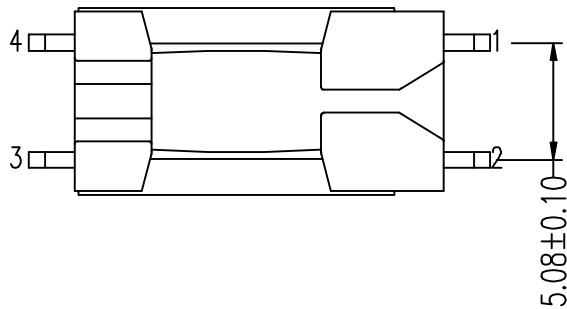

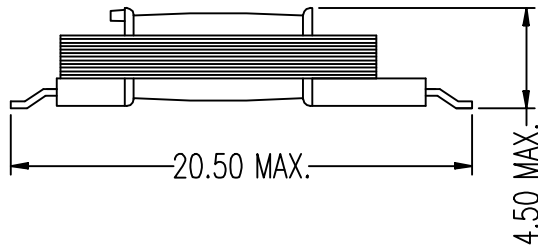
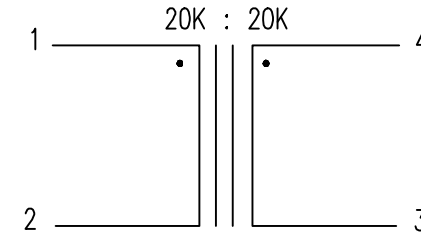


REACH & RoHS
COMPLIANT

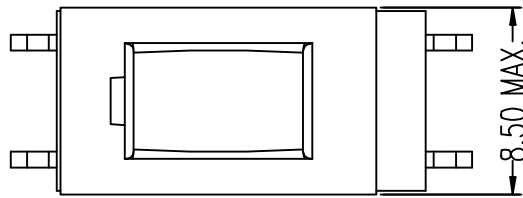

ELECTRICAL CHARACTERISTICS :

1. DCR : PIN 1-2 = 2.37 KOHM MAX.
PIN 4-3 = 2.82 KOHM MAX.
2. INDUCTANCE PARALLEL (@250HZ, 0.5Vrms) : PIN 1-2 = 70H MIN.
3. INSERTION LOSS (@1KHZ, 1Vrms, PIN 4-3 W/H 20KOHM) :
PIN 1-2 = 1.3dB ± 0.25dB
4. FREQ. RESP. (@REF 1KHZ) : @300HZ = ±0.3dB
@4KHZ = ±0.3dB
5. RETURN LOSS (@REF 20KOHM) : @300HZ = 18dB MIN.
@1KHZ = 18dB MIN.
@4KHZ = 18dB MIN.
- △ 6. TURN RATIO (@12KHZ, 1Vrms) : PIN 1-2 : PIN 4-3 = 1 ± 1%
7. HI-POT (@1250VAC, 1mA, 2SEC) : PIN 1-4
8. RoHS COMPLIANT

VOOHU 苏州沃虎电子科技有限公司
Su Zhou Voohu Electronic Tech.Co.Ltd

TITLE:
Audio Transformer

SIZE
A4
UNITS
MM[INCH]

GENERAL TOLERANCES
UNLESS SPECIFIED

APPROVED BY:
Geoffrey.Song

PART NO.:
WHTT4205

SACLE
1:1

REV
A0

$x \pm 0.35$
 $.x \pm 0.30$
 $.xx \pm 0.25$
 $.xxx \pm 0.10$

$x^\circ \pm 3.0^\circ$
 $.x^\circ \pm 2.0^\circ$
 $.xx^\circ \pm 1.5^\circ$
 $.xxx^\circ \pm 1.0^\circ$

CHECKED BY:
Elvis.Song

TEL: +86 400 1048 018

WEB: WWW.WOHU-TEK.COM

REMARK:

SHEET
1/1



DESIGND BY:
Sunny.Xu