
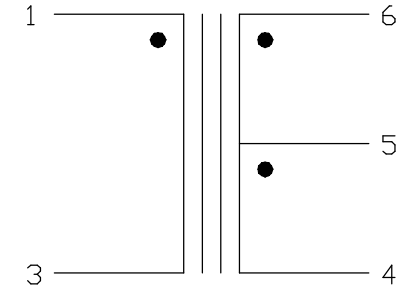
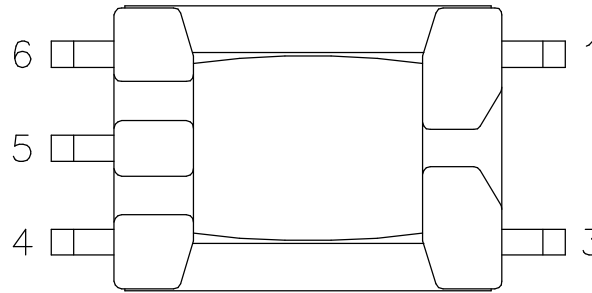


REACH & RoHS  
COMPLIANT

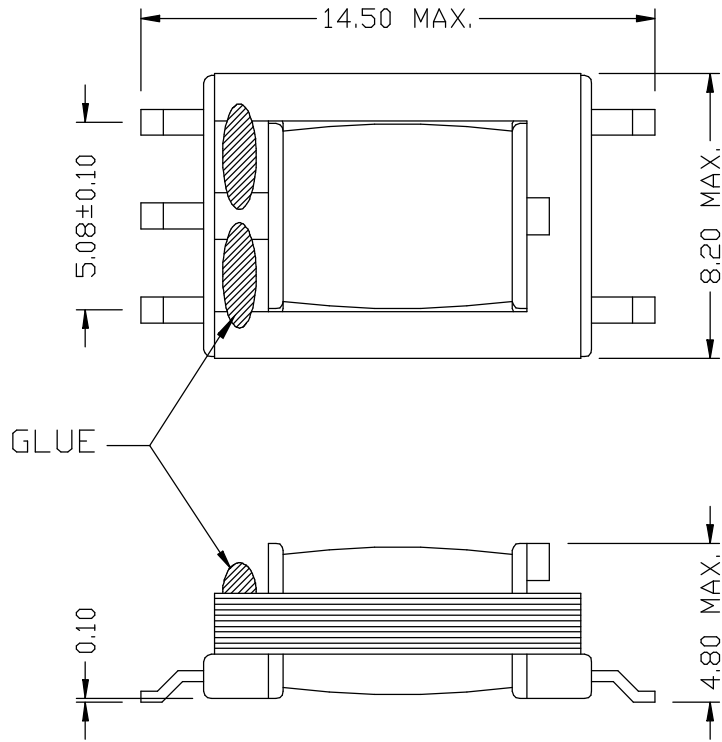

ELECTRICAL CHARACTERISTICS :

1. DCR : PIN 1-3 = 138  $\Omega$ HM MAX.  
PIN 4-6 = 130  $\Omega$ HM MAX.
2. INDUCTANCE PARALLEL (@250HZ, 0.5Vrms) : PIN 1-3 = 2.8H MIN.
3. INSERTION LOSS (@1KHZ, 0dB) : 4-6 W/H 365  $\Omega$ HM LOAD = 2.8dB MAX.
4. FREQ. RESP. (REF, 1KHZ) : (@300HZ) =  $\pm 0.5$ dB  
(@4KHZ) =  $\pm 0.5$ dB
5. RETURN LOSS (REF 600  $\Omega$ HM) : (@300HZ) = 25dB MIN.  
(@1KHZ) = 30dB MIN.  
(@4KHZ) = 30dB MIN.
6. TURN RATIO (@20KHZ, 1Vrms) : PIN 1-3 : PIN 6-4 =  $1 \pm 1\%$
7. HI-POT (@1KVAC, 1mA, 2SEC) : PIN 1-6

**VOOHU** 苏州沃虎电子科技有限公司  
Su Zhou Voohu Electronic Tech.Co.Ltd

TITLE:  
Audio Transformer

SIZE  
A4  
UNITS  
MM[INCH]

GENERAL TOLERANCES  
UNLESS SPECIFIED

APPROVED BY:  
Geoffrey.Song

PART NO.:  
WHTT5001

SACLE  
1:1

REV  
A0

$x \pm 0.35$   
 $.x \pm 0.30$


$x^\circ \pm 3.0^\circ$   
 $.x^\circ \pm 2.0^\circ$   
CHECKED BY:  
Elvis.Song

TEL: +86 400 1048 018

WEB: WWW.WOHU-TEK.COM

REMARK:

SHEET  
1/1



$.xx \pm 0.25$   
 $.xxx \pm 0.10$

DESIGND BY:  
Sunny.Xu