
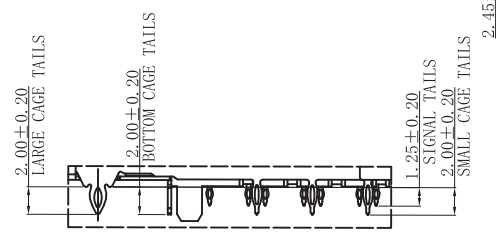
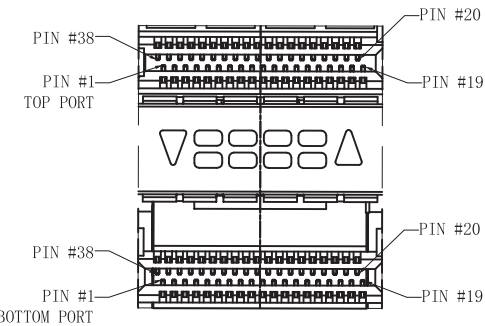

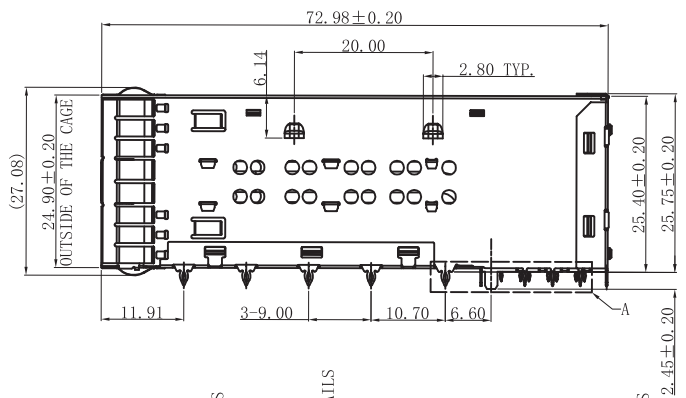

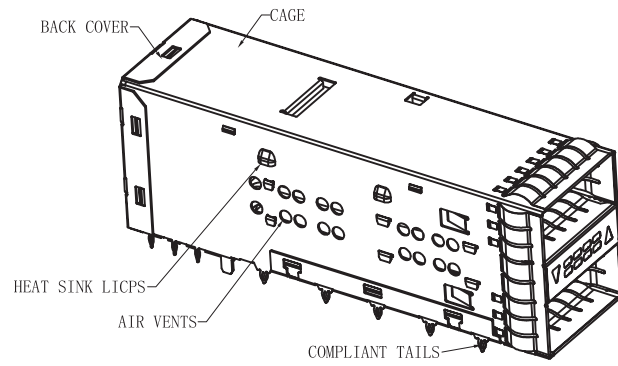


REACH & RoHS COMPLIANT

REV. 版本	ECN NO. 变更说明	DATE 日期
A	FIRST ISSUE	20170706
B	UPDATE DRAWING	20180930
C	UPDATE DRAWING	20240927

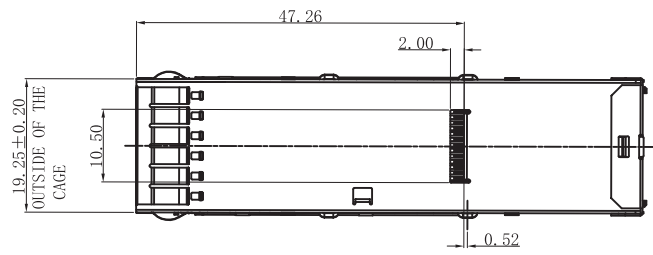

- NOTES:
- MATERIAL:
    - CAGE: COPPER ALLOY, THICKNESS:0.25mm;
    - EMI SPRING FINGERS: BERYLLIUM COPPER, THICKNESS:0.06mm REF;
    - LIGHT PIPES: POLYCARBONATE;
    - CONNECTOR HOUSING: GLASS FILED THERMOPLASTIC, UL:94V-0, COLOR:BLACK;
    - TERMINALS: HIGH PERFORMANCE COPPER ALLOY.
  - FINISH:
    - CAGE: 0.762um MIN NICKLE OVERALL;
    - EMI SPRING FINGERS: 0.762-2.54um NICKLE OVERALL;
    - TERMINALS: 0.762um Min GOLD PLATING OVER NICLE IN CONTACT AREA;
    - CONTACT NEEDLE EYE: 0.5~2.54 MICROMETERS MATTE TIN OVER 1.27~5.08 MICROMETERS NICKLE.
  - PACKAGING:
    - PRODUCT PACKAGED IN TRAYS AND CARTONS.

LIGHTPIPE STYLE TABLE	
	LEFT DOWN RIGHT UP LIGHTPIPE INDICATORS
W/O LOGO: WHSFP28221F015	

苏州沃虎电子科技有限公司 Su Zhou Voohu Electronic Tech.Co.Ltd	TITLE: QSFP+ 2X1 ASSMBLY TOPSEAI	SIZE A4	UNITS MM[INCH]	GENERAL TOLERANCES UNLESS SPECIFIED		APPROVED BY: Geoffrey.Song
	PART NO.: WHSFP28221F015	SACLE 1:1	REV A0	x±0.35 .x±0.30	x°±3.0° .x°±2.0°	CHECKED BY: Elvis.Song
	REMARK:	SHEET 1/2		.xx±0.25 .xxx±0.10	.xx°±1.5° .xxx°±1.0°	DESIGND BY: Sunny.Xu

TEL: +86 400 1048 018      WEB: WWW.WOHU-TEK.COM

