


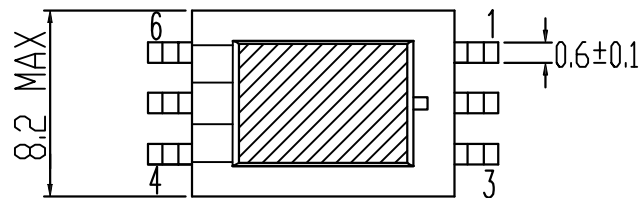


REACH & RoHS
COMPLIANT

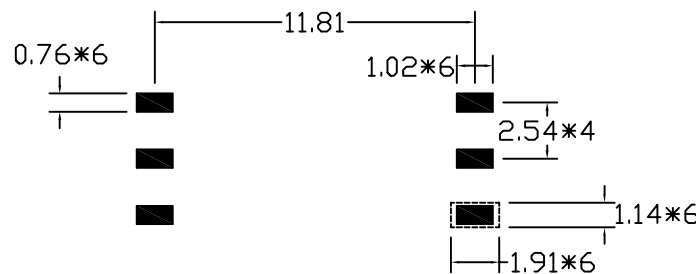


ELECTRICAL CHARACTERISTICS:

- 1.DCR:
PIN1-3=155 OHM±15%
PIN4-6=150 OHM±15%
- 2.PARALLEL INDUCTANCE:1KHz,0.1Vrms
PIN1-3=1.5H MIN
- 3.IMPEDANCE:1KHz,0.1Vrms
PIN1-3=600 OHM±15%
(PIN4-6 W/H 316 OHM)
- 4.INSERTION LOSS:1KHz
3.0dB±0.25dB
- 5.Frequency Response:
From 300Hz-4KHz
±0.5dB
- 6.Total Harmonic Distortion:600Hz,-10dB
-82dB MAX
- 7.TURN RATIO:10kHz,1.0Vrms
PIN1-3:6-4=1.0±1%
- 8.HI-POT:
1250Vac,2mA,1sec
PIN1-3 TO PIN6-4
- 9.ROHS COMPLIANT

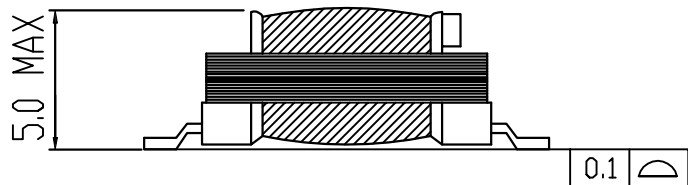

CUSTOMER TO DETERMINE LAND LAYOUT

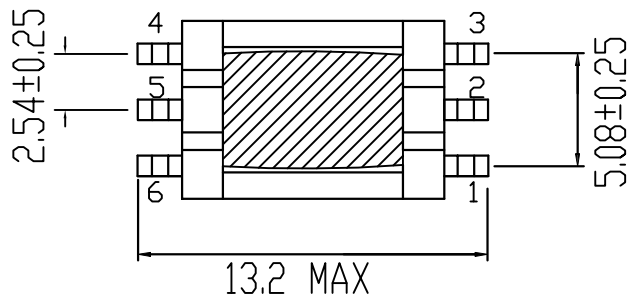

VOOHU 苏州沃虎电子科技有限公司
Su Zhou Voohu Electronic Tech.Co.Ltd

TITLE:
POTS TRANSFORMER

SIZE
A4
UNITS
MM[INCH]

GENERAL TOLERANCES
UNLESS SPECIFIED

APPROVED BY:
Geoffrey.Song

PART NO.:
WHTT6001

SACLE
1:1
REV
A0

$x \pm 0.35$	$x^\circ \pm 3.0^\circ$
$.x \pm 0.30$	$.x^\circ \pm 2.0^\circ$

CHECKED BY:
Elvis.Song

TEL: +86 400 1048 018

WEB: WWW.WOHU-TEK.COM

REMARK:

SHEET
1/1



$.xx \pm 0.25$	$.xx^\circ \pm 1.5^\circ$
$.xxx \pm 0.10$	$.xxx^\circ \pm 1.0^\circ$

DESIGN BY:
Sunny.Xu