
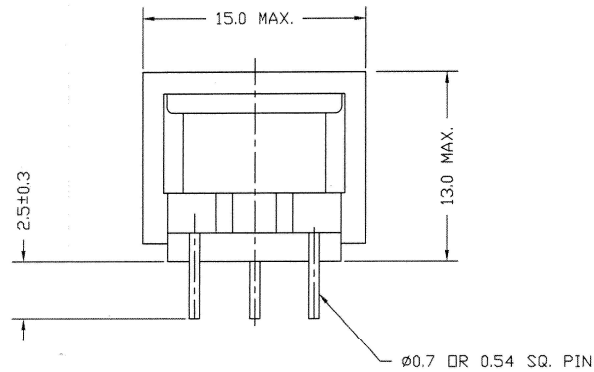
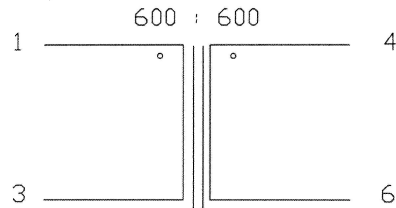


REACH & RoHS
COMPLIANT

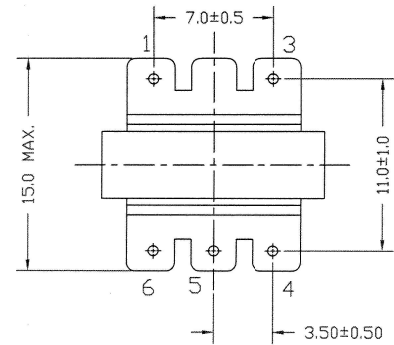

ELECTRICAL CHARACTERISTICS:

1. D.C.R. : PIN 1-3 = 30 ΩHM±/-15% , PIN 4-6 = 38 ΩHM±/-15%
2. PARALLEL INDUCTANCE (@300HZ, 1Vrms) : PIN 1-3 = 1.5H MIN.
3. IMPEDANCE (@1KHZ, 0dBm, 4-6 W/H 600 ΩHM)
PIN 1-3 = 600 ΩHM±/-5%
4. INSERTION LOSS (@1KHZ, 0dBm, 4-6 W/H 600 ΩHM) : 1dB MAX.
5. FREQ. RESP.(REF. 1KHZ): @300HZ = +/-0.35dB
@4KHZ = +/-0.35dB
6. RETURN LOSS (REF. 600 ΩHM) : @300HZ = 19 dB MIN.
@1KHZ = 22 dB MIN. @4KHZ = 23 dB MIN.
7. TURNS RATIO (@15KHZ, 1Vrms) : PIN 1-3 : 4-6 = 1+/-1%
8. HI-PDT(1200VAC, 1mA, 1MINUTE) : PIN 1-4
9. RoHS COMPLIANCE

VOOHU 苏州沃虎电子科技有限公司
Su Zhou Voohu Electronic Tech.Co.Ltd

TITLE:
Transformer

SIZE
A4
UNITS
MM[INCH]

GENERAL TOLERANCES
UNLESS SPECIFIED

APPROVED BY:
Geoffrey.Song

PART NO.:
WHTT14131

SACLE
1:1
REV
A0

x±0.35	x°±3.0°
.x±0.30	.x°±2.0°

CHECKED BY:
Elvis.Song

TEL: +86 400 1048 018

WEB: WWW.WOHU-TEK.COM

REMARK:

SHEET
1/1



.xx±0.25	.xx°±1.5°
.xxx±0.10	.xxx°±1.0°

DESIGND BY:
Sunny.Xu