
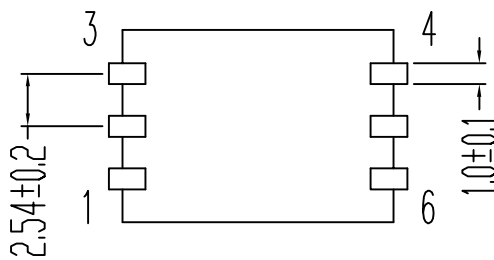
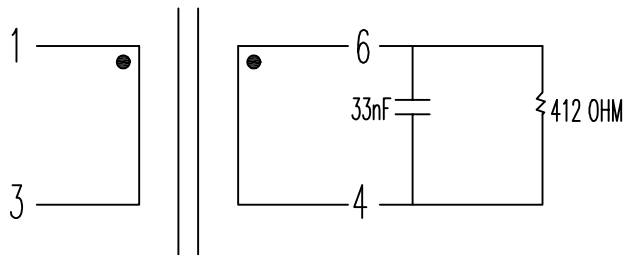
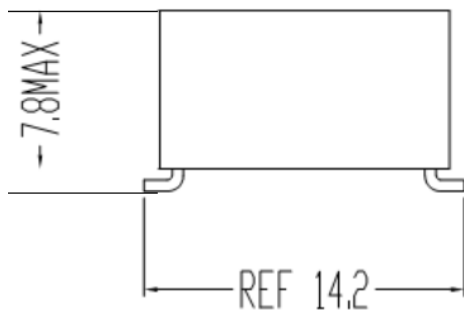


REACH & RoHS
COMPLIANT

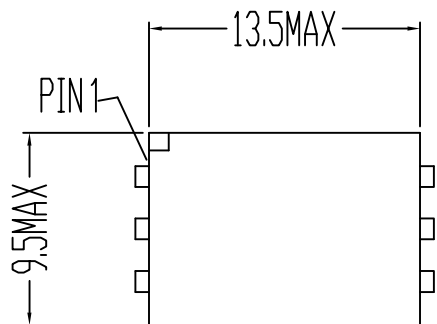

ELECTRICAL CHARACTERISTICS:

- 1.DCR:PIN1-3=115 OHM±15%,
PIN4-6=115 OHM±15%,
- 2.INDUCTANCE PARALLEL:200Hz,0.78V
PIN1-3=3.8H MIN
RESISTANCE PARALLEL 7500 OHM MIN
- 3.LEAKAGE INDUCTANCE:1KHz,0.1V
PIN1-3(4-6short)=6 mH TYP
- 4.INSERTION LOSS:2KHz,0dB
PIN1-3(4-6 W/H 412 OHM)=2dB MAX
- 5.RETURN LOSS:REF 600 OHM
FROM 200Hz~4Hz=24dB MIN
- 6.TURN RATIO:15KHz,1V PIN1-3:6-4=1±1%
- 7.FREQ RESP:REF 2KHz
FROM 200Hz~4KHz=±0.25dB
- 8.INSULATION RESISTANCE 100M OHM MIN@500VDC
- 9.HI-POT: 4600vAC 1mA 60SEC:P-S
- 10.ROHS COMPLIANT

TITLE:

Transformer

SIZE
A4

UNITS
MM[INCH]

GENERAL TOLERANCES
UNLESS SPECIFIED

APPROVED BY:

Geoffrey.Song

PART NO.:

WHTT6010

SACLE
1:1

REV
A0

.x±0.35
.x±0.30

x°±3.0°
.x°±2.0°

CHECKED BY:

Elvis.Song

REMARK:

SHEET
1/1



.xx±0.25
.xxx±0.10

.xx°±1.5°
.xxx°±1.0°

DESIGN BY:

Sunny.Xu

VOOHU 苏州沃虎电子科技有限公司
Su Zhou Voohu Electronic Tech.Co.Ltd

TEL: +86 400 1048 018

WEB: WWW.WOHU-TEK.COM