

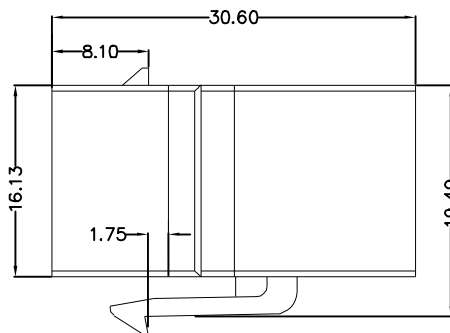


REACH & RoHS
COMPLIANT



MATERIAL:

HOUSING: ABS,UL94V-0 .

TERMINAL: PHOSPHOR BRONZE T=0.35MM,

50U" GOLD PLATING ON CONTACT AREA.

SHIELD: C2680,T=0.20MM,20 MIN NICKEL PLATING
ON ALL AREA.

MACHANICAL:

DURABILITY: 750 CYCLES MIN,12.5MM/MINUTE.

OPERATING TEMPERATURE: -40℃~+85℃.

STORAGE TEMPERATURE: -40℃~+85℃.

ALL CRITICAL DIMENSIONS WITH "**"

ELECTRICAL:


VOLTAGE: 125 VOLTS AC.

CURRENT RATING : 1.5AMP.


DIELECTRIC STRENGTH: 1000 VAC RMS 50HZ OR 60HZ,1MIN.

INSULATION RESISTANCE: 500 MEGA OHMS MIN @ 500V DC.


CONTACT RESISTANCE: 30 MILLIOHMS MAX.



Front Panel Jack Only Clearance
W/O Latch Feature

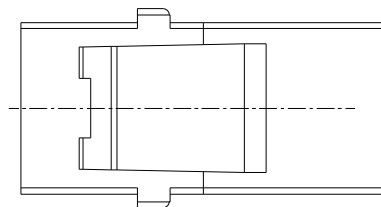

Single Panel-Latch Clearance
Panel Thickness 1.60mm

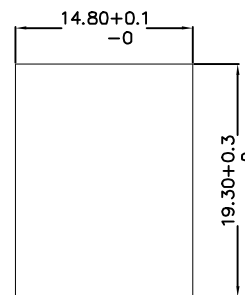

VOOHU 苏州沃虎电子科技有限公司
Su Zhou Voohu Electronic Tech.Co.Ltd

TITLE:
RJ45无屏蔽直通模块

PART NO.:
SYT-US030-026S-L

REMARK:


SIZE
A4

SACLE
1:1

SHEET
1/1

UNITS
MM[INCH]

REV
A0



GENERAL TOLERANCES
UNLESS SPECIFIED

± 0.35
 ± 0.30

± 0.25
 ± 0.10

$\pm 3.0^\circ$
 $\pm 2.0^\circ$

$\pm 1.5^\circ$
 $\pm 1.0^\circ$

APPROVED BY:
Geoffrey.Song

CHECKED BY:
Elvis.Song

DESIGND BY:
Sunny.Xu

TEL: +86 400 1048 018

WEB: WWW.WOHU-TEK.COM