



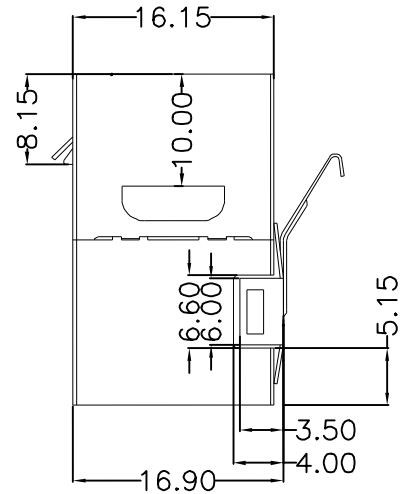


1
2
3
4
5
6
7
8

REACH & RoHS
COMPLIANT

REV.	ECN / DESCRIPTION	BY	DATE
A0	NEW	ZG.HU	2017.11.13

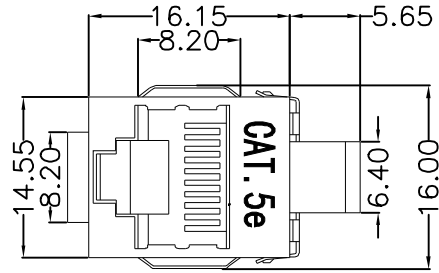

MATERIAL:

HOUSING: ABS,UL94V-0,WHITE.

TERMINAL: PHOSPHOR BRONZE Ø=0.46MM.

3U" GOLD PLATING ON CONTACT AREA.

SHIELD: C2680,T=0.20MM,20U" MIN NICKEL PLATING
ON ALL AREA.

MACHANICAL:

DURABILITY: 750 CYCLES MIN,12.5MM/MINUTE.

OPERATING TEMPERATURE: -20℃~+75℃.

STORAGE TEMPERATURE: -40℃~+85℃.

ELECTRICAL:

VOLTAGE: 125 VOLTS AC.

CURRENT RATING : 1.5AMP.

DIELECTRIC STRENGTH: 1000 VAC RMS 50HZ OR 60HZ,1MIN.

INSULATION RESISTANCE: 500 MEGA OHMS MIN @ 500V DC.

CONTACT RESISTANCE: 30 MILLIOHMS MAX.

TITLE:
RJ45屏蔽直通模块CAT5.e

PART NO.:
SYTZT1188GWC8D3T5E387

REMARK:


SIZE
A4

SCALE
1:1

SHEET
1/1

UNITS
MM[INCH]

REV
A0



GENERAL TOLERANCES
UNLESS SPECIFIED

$x \pm 0.35$
 $x \pm 0.30$
 $.xx \pm 0.25$
 $.xxx \pm 0.10$

$x^\circ \pm 3.0^\circ$
 $x^\circ \pm 2.0^\circ$
 $.xx^\circ \pm 1.5^\circ$
 $.xxx^\circ \pm 1.0^\circ$

APPROVED BY:
Geoffrey.Song

CHECKED BY:
Elvis.Song

DESIGNED BY:
Sunny.Xu

VOOHU 苏州沃虎电子科技有限公司
Su Zhou Voohu Electronic Tech.Co.Ltd

TEL: +86 400 1048 018

WEB: WWW.WOHU-TEK.COM