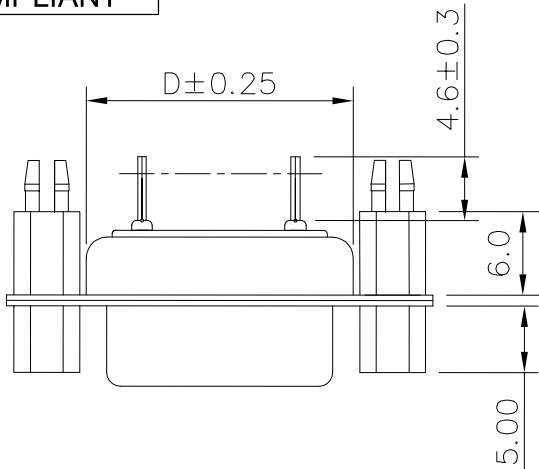

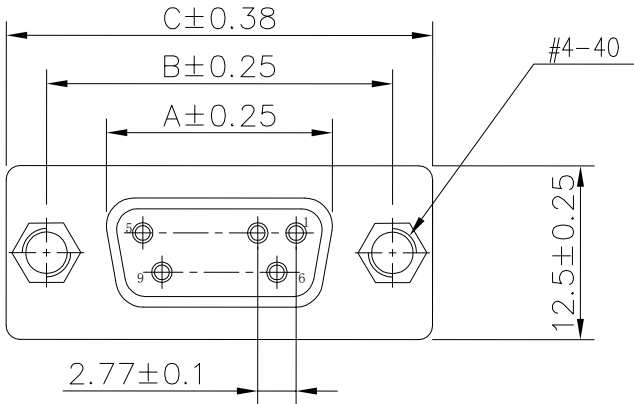
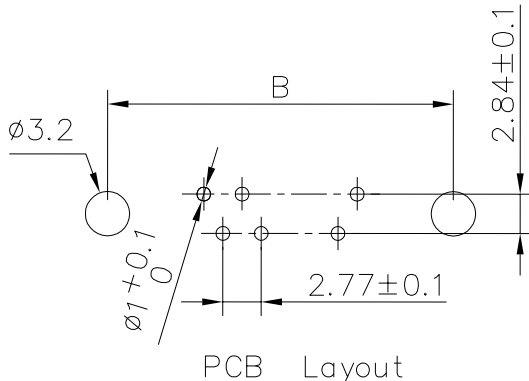


1	2	3	4	5	6	7	8																														
REACH & RoHS COMPLIANT						No.of Contact	A	B	C	D																											
						09	16.33	24.99	30.81	19.0																											
						15	24.66	33.32	39.14	27.7																											
						25	38.38	47.04	53.04	41.0																											
						37	54.84	63.50	69.32	57.3																											
					Current rating:3 AMP Withstanding voltage:1000V AC Insulation resistance:1000mΩ min. Temperature range:-55℃ to +125℃ Durability:500 cycles ROHS compliant																																
					Part No.: WHB050XX8X1ADE5																																
					Pin No.: 09: 9pin 15: 15pin 25: 25pin 37: 37pin																																
					Housing: 1: black 5: white 6: blue																																
					 PCB Layout																																
					<table><tr><td>6</td><td>Screw</td><td>Steel</td><td>Palting: Ni</td></tr><tr><td>5</td><td>Boardlock</td><td>Copper alloy</td><td>Palting: Ni</td></tr><tr><td>4</td><td>Housing</td><td>PBT+30%GF</td><td>Color: see part no.</td></tr><tr><td>3</td><td>Rear shell</td><td>SPCC</td><td>Palting: Sn</td></tr><tr><td>2</td><td>Front shell</td><td>SPCC</td><td>Palting: Ni</td></tr><tr><td>1</td><td>Terminal</td><td>Copper alloy</td><td>Contact area: G/F Solder area: Sn Under-plating: Ni</td></tr><tr><td>Item</td><td>Desc.</td><td>Material</td><td>Remarks</td></tr></table>					6	Screw	Steel	Palting: Ni	5	Boardlock	Copper alloy	Palting: Ni	4	Housing	PBT+30%GF	Color: see part no.	3	Rear shell	SPCC	Palting: Sn	2	Front shell	SPCC	Palting: Ni	1	Terminal	Copper alloy	Contact area: G/F Solder area: Sn Under-plating: Ni	Item	Desc.	Material	Remarks
6	Screw	Steel	Palting: Ni																																		
5	Boardlock	Copper alloy	Palting: Ni																																		
4	Housing	PBT+30%GF	Color: see part no.																																		
3	Rear shell	SPCC	Palting: Sn																																		
2	Front shell	SPCC	Palting: Ni																																		
1	Terminal	Copper alloy	Contact area: G/F Solder area: Sn Under-plating: Ni																																		
Item	Desc.	Material	Remarks																																		
 苏州沃虎电子科技有限公司 Su Zhou Voohu Electronic Tech.Co.Ltd		TITLE: D-SUB母头180度直插, 后铆6.0鱼叉前锁5.0螺母 A版		SIZE A4	UNITS MM[INCH]	GENERAL TOLERANCES UNLESS SPECIFIED		APPROVED BY: Geoffrey.Song																													
		PART NO.: WHB050XX8X1ADE5		SCALE 1:1	REV A0	$x \pm 0.35$ $.x \pm 0.30$	$x^\circ \pm 3.0^\circ$ $.x^\circ \pm 2.0^\circ$	CHECKED BY: Elvis.Song																													
TEL: +86 400 1048 018 WEB: WWW.WOHU-TEK.COM		REMARK:		SHEET 1/1		$.xx \pm 0.25$ $.xxx \pm 0.10$	$.xx^\circ \pm 1.5^\circ$ $.xxx^\circ \pm 1.0^\circ$	DESIGNED BY: Sunny.Xu																													