


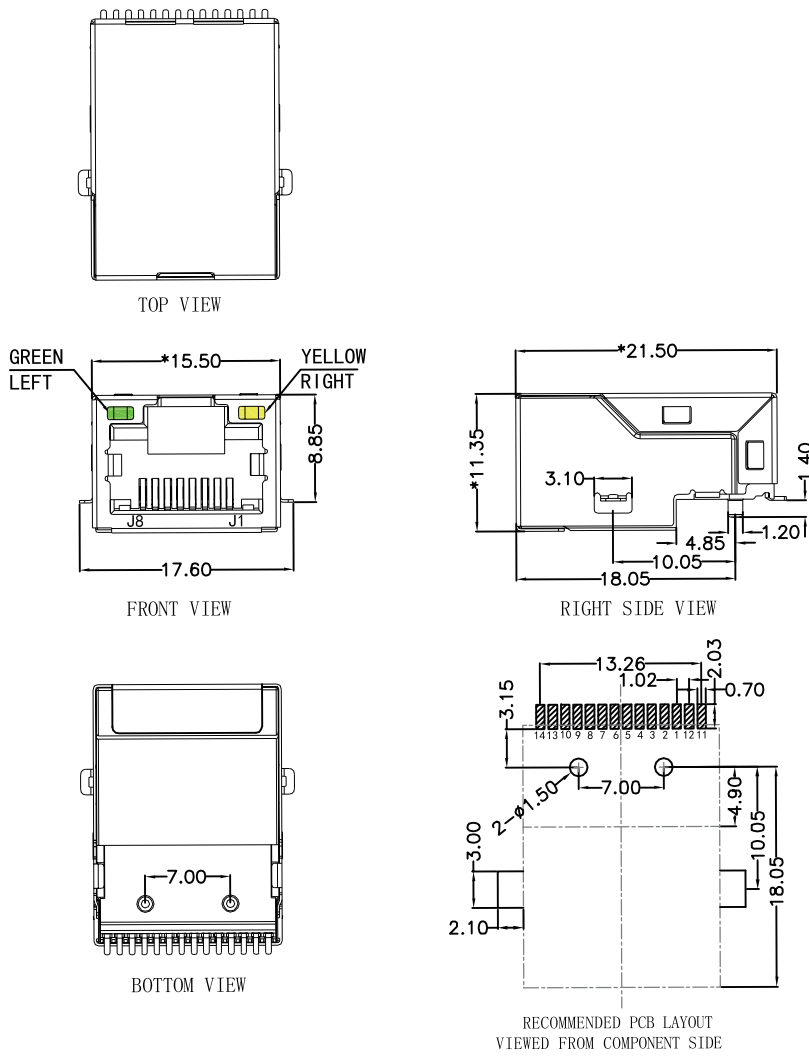

MATERIAL:
HOUSING: LCP,UL94V-0,BLACK.
TERMINALS BRACKET: LCP,UL94V-0,BLACK.
SHIELD: C2680,T=0.20MM,NICKEL PLATING ON ALL AREA.
TERMINAL: PHOSPHOR BRONZE C5191,T=0.35MM,
6U" GOLD PLATING ON CONTACT AREA.

MECHANICAL:
DURABILITY: 750 CYCLES MIN.
MATING FORCE: 23N MAX.
OPERATING TEMPERATURE: -40°C~+85°C.
STORAGE TEMPERATURE: -40°C~+85°C.
ALL CRITICAL DIMENSIONS WITH "*"


A	VOOHU 苏州沃虎电子科技有限公司 Su Zhou Voohu Electronic Tech.Co.Ltd		TITLE: TAB-UP 1X1 1000BASE贴片	SIZE A4	UNITS MM[INCH]	GENERAL TOLERANCES UNLESS SPECIFIED		APPROVED BY: Geoffrey.Song	
			PART NO.: SYT211Q106AB2A7CBS057	SCALE 1:1	REV A0	x±0.35	x°±3.0°	CHECKED BY:	
	TEL: +86 400 1048 018		REMARK:	SHEET 1/4		.xx±0.25	.xx°±1.5°	DESIGNED BY:	
						.xxx±0.10	.xxx°±1.0°	Sunny.Xu	

1
2
3
4
5
6
7
8

REACH & RoHS
COMPLIANT


REV.	ECN / DESCRIPTION	BY	DATE
A0	NEW	Sunny.Xu	2018.05.18

Suggested Panel Opening:

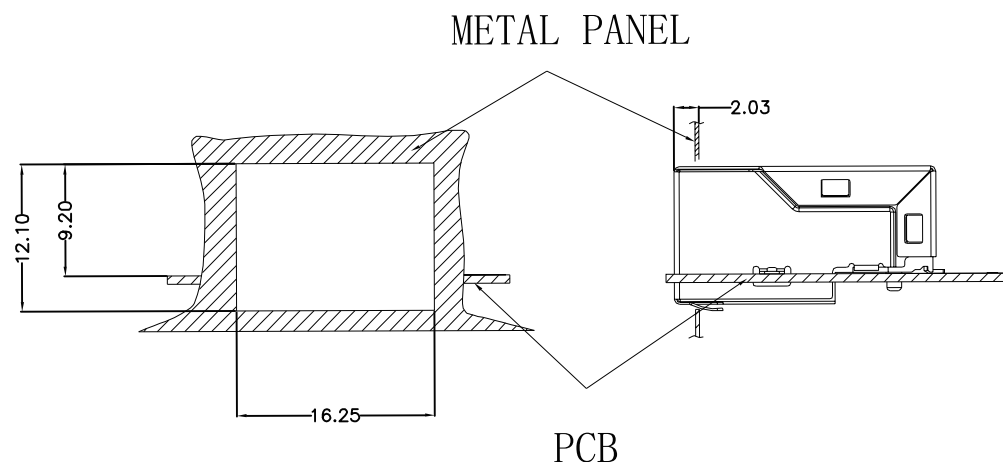

UNIT: mm / inch
Tolerances: ± 0.10 / 0.004

Keep-Out Area (Component Side View):

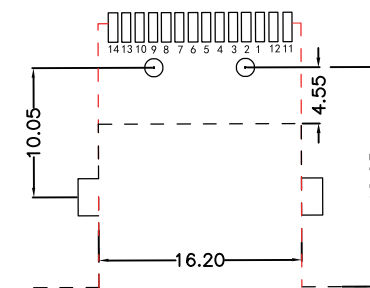

UNIT: mm / inch
Tolerances: ± 0.10 / 0.004

VOOHU 苏州沃虎电子科技有限公司
Su Zhou Voohu Electronic Tech.Co.Ltd

TITLE:
TAB-UP 1X1 1000BASE贴片

PART NO.:
SYT211Q106AB2A7CBS057

REMARK:


SIZE
A4

SCALE
1:1

SHEET
2/4

UNITS
MM[INCH]

REV
A0



GENERAL TOLERANCES
UNLESS SPECIFIED

$x \pm 0.35$	$x^\circ \pm 3.0^\circ$
$.x \pm 0.30$	$.x^\circ \pm 2.0^\circ$
$.xx \pm 0.25$	$.xx^\circ \pm 1.5^\circ$
$.xxx \pm 0.10$	$.xxx^\circ \pm 1.0^\circ$


APPROVED BY:
Geoffrey.Song

CHECKED BY:
Elvis.Song


DESIGNED BY:
Sunny.Xu

TEL: +86 400 1048 018

WEB: WWW.WOHU-TEK.COM

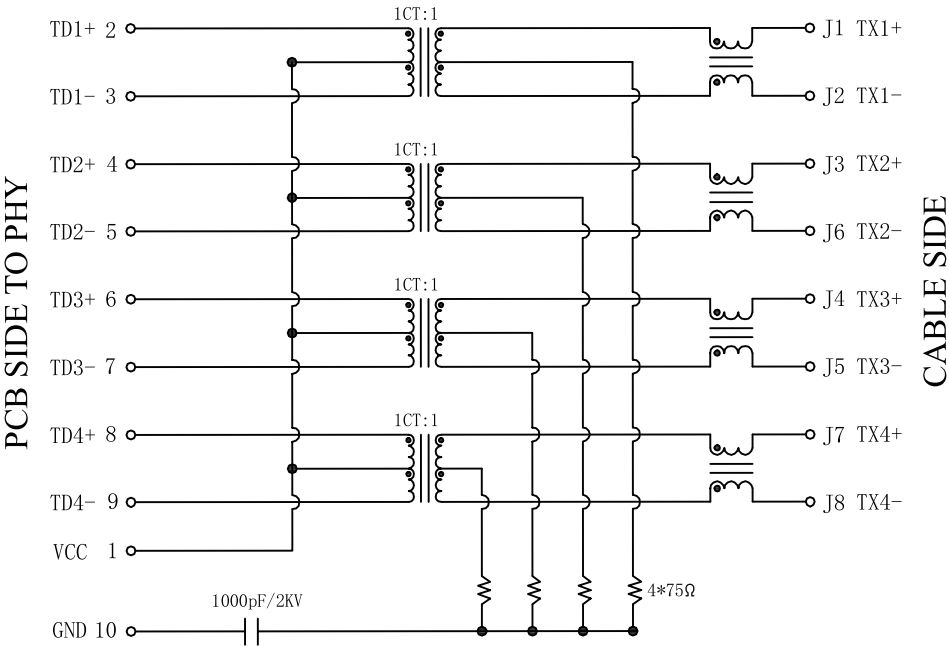

- Electrical:**
- 1.Turn ratio:2~3:J1~J2=1CT:1CT(±2%).
4~5:J3~J6=1CT:1CT(±2%).
6~7:J4~J5=1CT:1CT(±2%).
8~9:J7~J8=1CT:1CT(±2%).
 - 2.OCL:350uH Min.at 100KHz 100mV 8mA DC.
 - 3.Insertion Loss: -1.0 dB Max 1~100MHz.
 - 4.Return loss: -18dB Min 1~30MHz;
-14dB Min 30~60MHz.
-12dB Min 60~80MHz.
-10dB Min 80~100MHz.
 - 5.Cross talk: -40dB Min 1~30MHz;
-35dB Min 30~60MHz;
-30dB Min 60~100MHz;
 - 6.CMR: -30dB Min 1~100MHz;
 - 7.Hi-Pot:2250V DC 6S 1mA PRI TO SEC

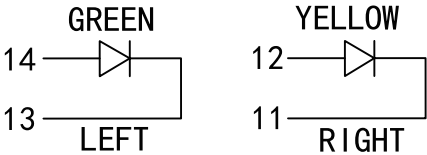

LED Specification

Standard LED Color	LED Wavelength	Foward(A)	Foward(V)
Green	565nm	20mA	2.2-2.4V
Yellow	590nm	20mA	2.1-2.5V

1

2

3

4

5

6

7

8

A

B

C

D


E

F

G

H

PROFILE OF REFLOW SOLDERING

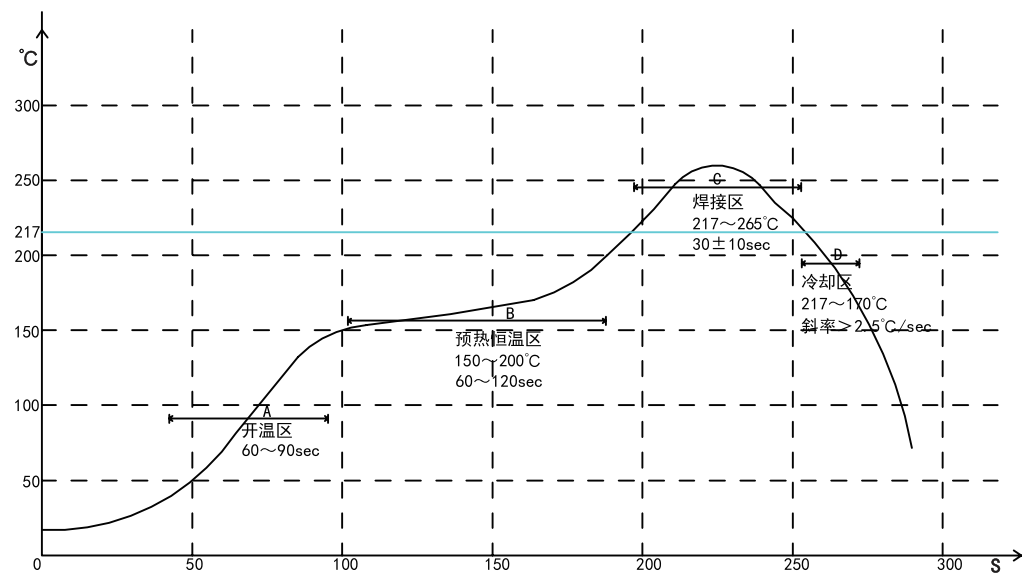

A. Temperature range of open
B.Preheat temperature zone
C.The welding zone
D.The cooling zone
Tip temperature:265±5°C.
Tip temperature time:30±10Sec.
Tip melting point of Sn96.5/Ag3/Cu0.5.

A	VOOHU 苏州沃虎电子科技有限公司 Su Zhou Voohu Electronic Tech.Co.Ltd		TITLE: TAB-UP 1X1 1000BASE贴片	SIZE A4	UNITS MM[INCH]	GENERAL TOLERANCES UNLESS SPECIFIED		APPROVED BY: Geoffrey.Song	
			PART NO.: SYT211Q106AB2A7CBS057	SCALE 1:1	REV A0	x±0.35 .x±0.30	x°±3.0° .x°±2.0°	CHECKED BY: Elvis.Song	
	TEL: +86 400 1048 018 WEB: WWW.WOHU-TEK.COM		REMARK:	SHEET 4/4		.xx±0.25 .xxx±0.10	.xx°±1.5° .xxx°±1.0°	DESIGNED BY: Sunny.Xu	