

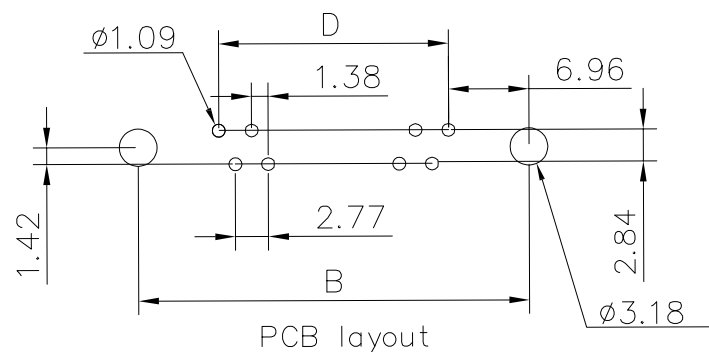
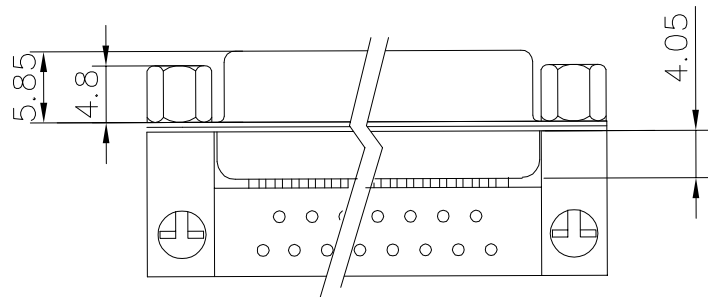


REACH & RoHS
COMPLIANT

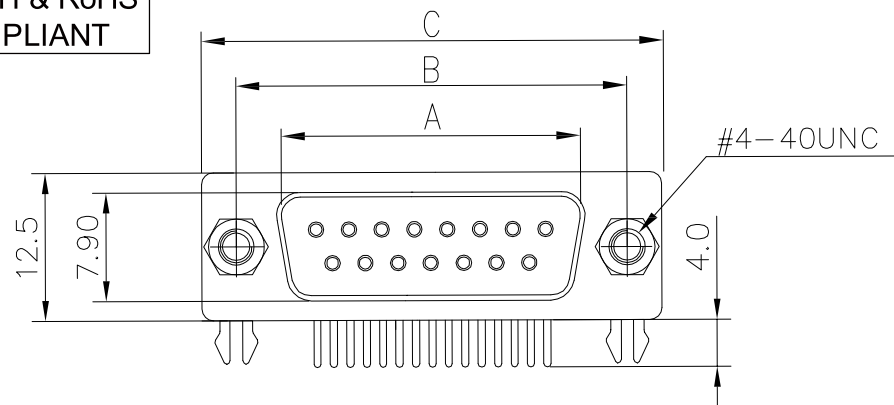

PCB layout

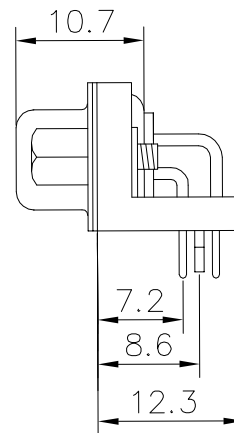

Pin No.	A	B	C±0.38	D
09	16.33	24.99	30.81	11.08
15	24.66	33.32	39.14	19.39
25	38.38	47.04	53.04	33.24
37	54.84	63.50	69.32	49.86

Current rating: 5 AMP.
Withstanding voltage: 1000V AC
Insulation resistance: 1000MΩ Min.
Temperature range: -55℃ to +105℃
Durability: 500 cycles
ROHS compliant

Part No.: WHB050XX6X1XD02

No. of contact:
09: 9pos
15: 15pos
25: 25pos
37: 37pos

Housing color:
1: Black
5: White
6: Blue
Terminal plating:
4: full Au 2u"
5: full Au 1u"

5	Screw	Steel	Palting: Ni
4	Board lock	Copper alloy	Palting: Sn
3	Housing	PBT+30%GF	Color: see part no.
2	Shell	SPCC	Palting: Ni
1	Terminal	Copper alloy	Plating: see part no.
Item	Desc.	Material	Remarks

TITLE: D-SUB machined pin female
right angle, 7.2mm, riveted
insert, lock screw

PART NO.:
WHB050XX6X1XD02

REMARK:


SIZE
A4

SCALE
1:1

SHEET
1/1

UNITS
MM[INCH]

REV
A0



GENERAL TOLERANCES
UNLESS SPECIFIED

x±0.35	x°±3.0°
.x±0.30	.x°±2.0°
.xx±0.25	.xx°±1.5°
.xxx±0.10	.xxx°±1.0°

APPROVED BY:
Geoffrey.Song

CHECKED BY:
Elvis.Song

DESIGNED BY:
Sunny.Xu

VOOHU 苏州沃虎电子科技有限公司
Su Zhou Voohu Electronic Tech.Co.Ltd

TEL: +86 400 1048 018

WEB: WWW.WOHU-TEK.COM