
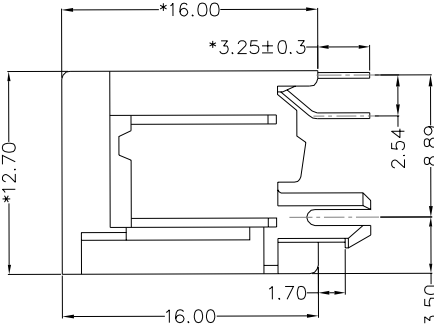

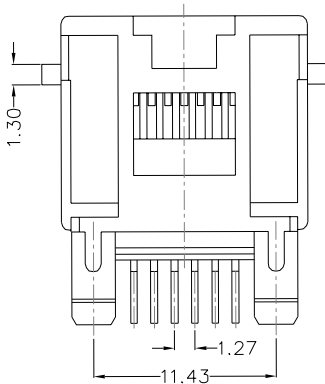
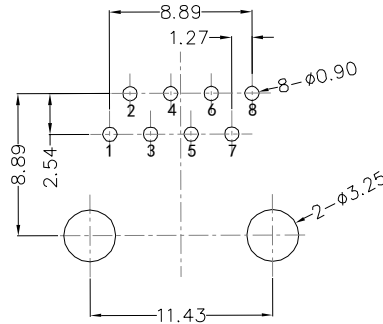


1	2	3	4	5	6	7	8		
REACH & RoHS COMPLIANT						REV.	ECN / DESCRIPTION	BY	DATE
						A0	NEW	Sunny.Xu	2017.11.06
						MATERIAL: HOUSING: PBT,UL94V-0,BLACK. TERMINALS BRACKET: PBT,UL94V-0,PINK. TERMINAL: PHOSPHOR BRONZE T=0.35MM, 6U" GOLD PLATING. SHIELD: C2680,T=0.20MM,20 MIN NICKEL PLATING ON ALL AREA. MACHANICAL: DURABILITY: 750 CYCLES MIN,12.5MM/MINUTE. INSERTION FORCE: 2.2KG.F MAX. RETENTION STRENGTH : 7.7KG.F BETWEEN JACK AND PLUG. OPERATING TEMPERATURE: -40℃~+85℃. STORAGE TEMPERATURE: -40℃~+85℃. ALL CRITICAL DIMENSIONS WITH "" ELECTRICAL: VOLTAGE: 125 VOLTS AC. CURRENT RATING : 1.5AMP. DIELECTRIC STRENGTH: 1000 VAC RMS 50HZ OR 60HZ,1MIN. INSULATION RESISTANCE: 500 MEGA OHMS MIN. INITIAL AFTER 500V DC FOR 1 MINUTE. CONTACT RESISTANCE: SINGLE TERMINAL 30 MILLIOHMS MAX. INITIAL 50 MILLIOHMS MAX. AFTER DURABILITY TEST.			
									
FRONT VIEW		RIGHT SIDE VIEW		BACK VIEW					
BOTTOM VIEW		RECOMMENDED PCB LAYOUT VIEWED FROM COMPONENT SIDE				1 ○ J1 2 ○ J2 3 ○ J3 4 ○ J4 5 ○ J5 6 ○ J6 7 ○ J7 8 ○ J8 PCB SIDE TO PHY CABLE SIDE			
 苏州沃虎电子科技有限公司 Su Zhou Vohu Electronic Tech.Co.Ltd		TITLE: 180° TAB-UP PART NO.: SYT52TE1188IWA1DB4078 REMARK:		SIZE A4 SCALE 1:1 SHEET 1/1	UNITS MM[INCH] REV A0 	GENERAL TOLERANCES UNLESS SPECIFIED x±0.35 .x±0.30 .xx±0.25 .xxx±0.10		APPROVED BY: Geoffrey.Song CHECKED BY: Elvis.Song DESIGNED BY: Sunny.Xu	
TEL: +86 400 1048 018		WEB: WWW.WOHU-TEK.COM							