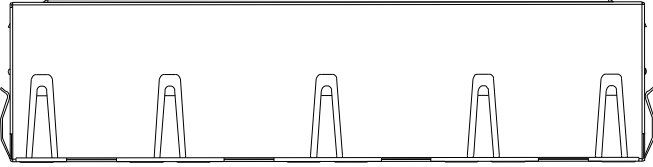
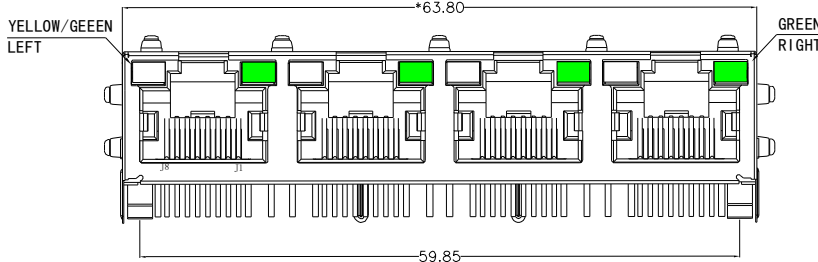

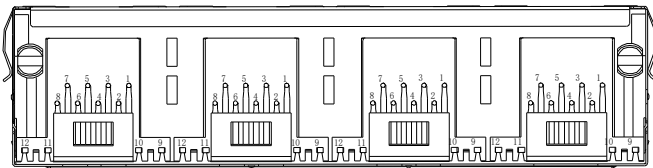
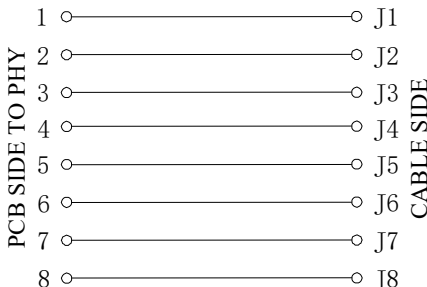
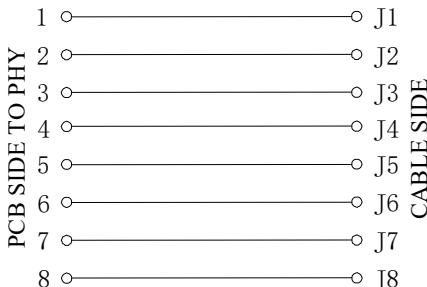
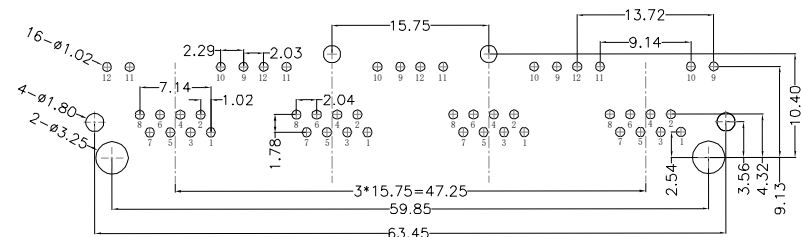




1	2	3	4	5	6	7	8														
REACH & RoHS COMPLIANT						REV.	ECN / DESCRIPTION	BY	DATE												
 TOP VIEW						A0	NEW	Sunny.Xu	2018.11.05												
						A1	灯孔直径变更	Sunny.Xu	2021.11.08												
 FRONT VIEW						MATERIAL: HOUSING: PA46,UL94V-0,BLACK. TERMINAL: PHOSPHOR BRONZE Ø=0.46MM, G/FU" GOLD PLATING. SHIELD: C2680,T=0.20MM,20 MIN NICKEL PLATING ON ALL AREA.															
						MACHANICAL: DURABILITY: 750 CYCLES MIN,12.5MM/MINUTE. INSERTION FORCE: 2.2KG.F MAX. RETENTION STRENGTH : 7.7KG.F BETWEEN JACK AND PLUG. OPERATING TEMPERATURE: -40℃~+85℃. STORAGE TEMPERATURE: -40℃~+85℃. ALL CRITICAL DIMENSIONS WITH "*"															
						ELECTRICAL: VOLTAGE: 125 VOLTS AC. CURRENT RATING : 1.5AMP. DIELECTRIC STRENGTH: 1000 VAC RMS 50HZ OR 60HZ,1MIN. INSULATION RESISTANCE: 500 MEGA OHMS MIN. INITIAL AFTER 500V DC FOR 1 MINUTE.															
						CONTACT RESISTANCE: SINGLE TERMINAL 30 MILLIOHMS MAX. INITIAL 50 MILLIOHMS MAX. AFTER DURABILITY TEST.															
						LED Specification															
 RIGHT SIDE VIEW						<table><tr><td>Standard LED Color</td><td>LED Wavelength</td><td>Foward(A)</td><td>Foward(V)</td></tr><tr><td>Green</td><td>568nm</td><td>20mA</td><td>1.85-2.45V</td></tr><tr><td>Yellow</td><td>585nm</td><td>20mA</td><td>1.7-2.2V</td></tr></table>				Standard LED Color	LED Wavelength	Foward(A)	Foward(V)	Green	568nm	20mA	1.85-2.45V	Yellow	585nm	20mA	1.7-2.2V
						Standard LED Color	LED Wavelength	Foward(A)	Foward(V)												
Green	568nm	20mA	1.85-2.45V																		
Yellow	585nm	20mA	1.7-2.2V																		
 BOTTOM VIEW						 PCB SIDE TO PHY															
						 CABLE SIDE															
 RECOMMENDED PCB LAYOUT VIEWED FROM COMPONENT SIDE						 LEFT															
						 RIGHT															
 苏州沃虎电子科技有限公司 Su Zhou Voohu Electronic Tech.Co.Ltd			TITLE: RJ45直通 56带屏蔽带灯		SIZE A4	UNITS MM[INCH]	GENERAL TOLERANCES UNLESS SPECIFIED		APPROVED BY: Geoffrey.Song												
TEL: +86 400 1048 018 WEB: WWW.WOHU-TEK.COM			PART NO.: SYT561488DF4A3DY1027		SCALE 1:1	REV A0	x±0.35	x°±3.0°	CHECKED BY: Elvis.Song												
			REMARK:		SHEET 1/1		.x±0.30	.x°±2.0°	DESIGNED BY: Sunny.Xu												
							.xx±0.25	.xx°±1.5°													
							.xxx±0.10	.xxx°±1.0°													