
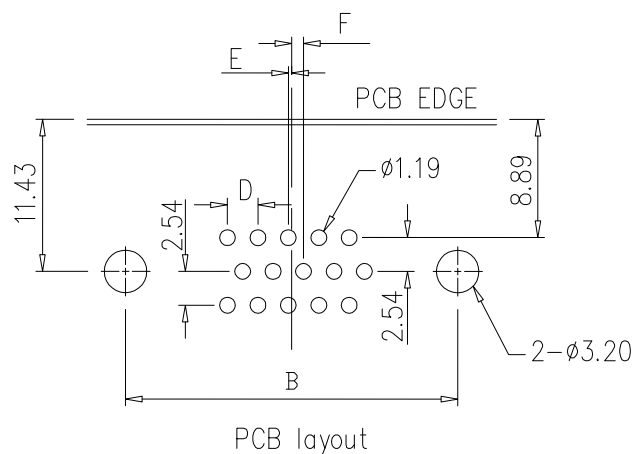
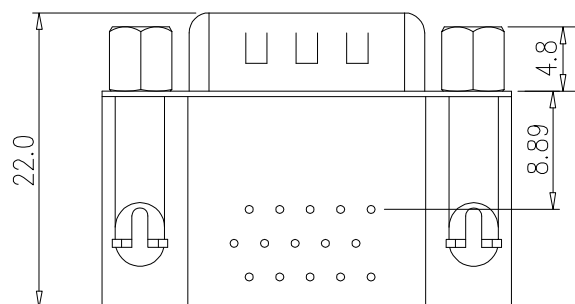
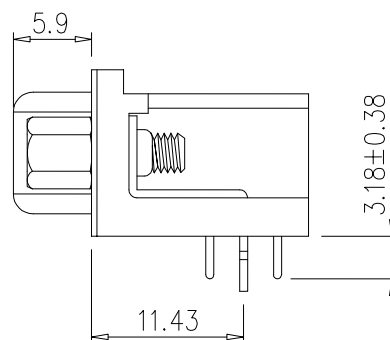


REACH & RoHS  
COMPLIANT

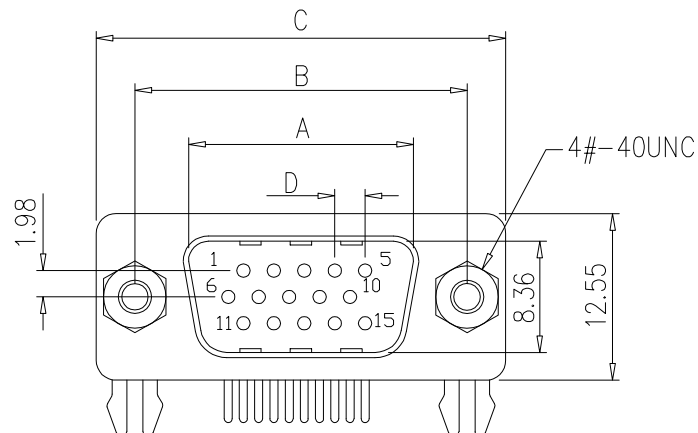

Current Rating: 3 AMP.  
Withstanding voltage: 1000V AC  
Insulation resistance: 1000MΩ Min.  
Temperature range: -45°C to +125°C

|      |           |              |                                                           |
|------|-----------|--------------|-----------------------------------------------------------|
| 6    | Rivet     | Copper alloy | Palting: Ni                                               |
| 5    | Screw     | Steel        | Palting: Ni                                               |
| 4    | Boardlock | Copper alloy | Palting: Ni                                               |
| 3    | Housing   | PBT+30%GF    | Color: black                                              |
| 2    | Shell     | SPCC         | Palting: Ni                                               |
| 1    | Terminal  | Copper alloy | Contact area: G/F<br>Solder area: Sn<br>Under-plating: Ni |
| Item | Desc.     | Material     | Remaks                                                    |

**VCOHU** 苏州沃虎电子科技有限公司  
Su Zhou Voohu Electronic Tech.Co.Ltd

**TITLE:** HD.D-SUB male right angle,  
8.89mm, riveted board lock, nut 4.8mm

SIZE  
A4

UNITS  
MM[INCH]

GENERAL TOLERANCES  
UNLESS SPECIFIED

APPROVED BY:  
Geoffrey.Song

PART NO.:  
WHB04015511ADF4

SCALE  
1:1

REV  
A0

|  |                 |
|--|-----------------|
|  | $x \pm 0.35$    |
|  | $.x \pm 0.30$   |
|  | $.xx \pm 0.25$  |
|  | $.xxx \pm 0.10$ |

|  |                                |
|--|--------------------------------|
|  | $x^{\circ} \pm 3.0^{\circ}$    |
|  | $.x^{\circ} \pm 2.0^{\circ}$   |
|  | $.xx^{\circ} \pm 1.5^{\circ}$  |
|  | $.xxx^{\circ} \pm 1.0^{\circ}$ |

|              |            |
|--------------|------------|
| CHECKED BY:  | Elvis.Song |
| DESIGNED BY: | Sunny.Xu   |

TEL: +86 400 1048 018

WEB: [WWW.WOHU-TEK.COM](http://WWW.WOHU-TEK.COM)

REMARK:

SHEET  
1/1



---

1

---

2

3

4

5

6

---

8