
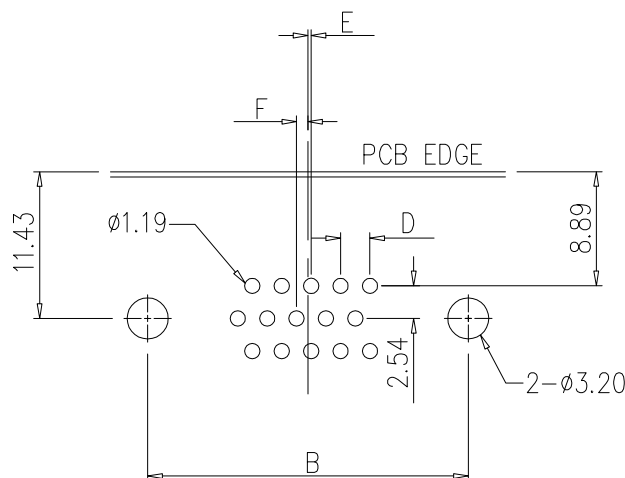
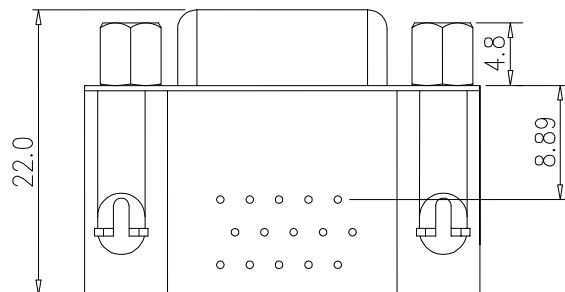
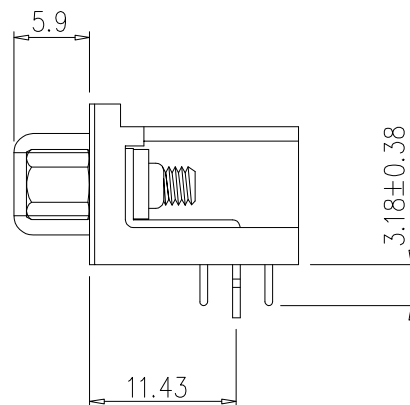


REACH & RoHS
COMPLIANT

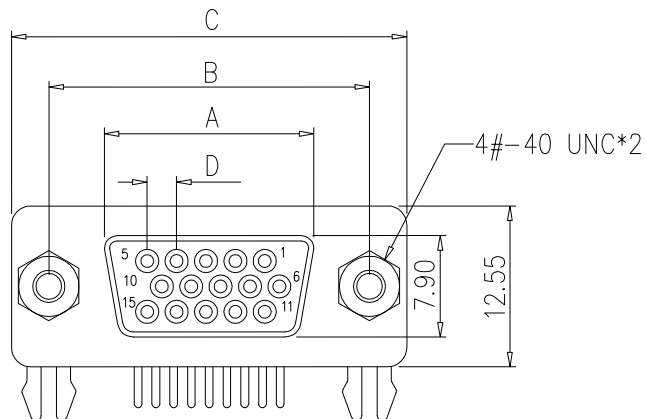

No.of contact	A	B	C	D	E	F
15	16.33	24.99	30.81	2.29	0.25	0.89
26	24.66	33.32	39.14	2.29	0.51	0.64
44	38.38	47.04	53.04	2.29	0.51	0.64
62	54.84	63.50	69.32	2.29	0.58	0.62

Current rating: 3A
Withstanding voltage: 1000V AC
Insulation resistance: 1000MΩ Min.
Temperature range: -45℃ to +105℃
ROHS compliant

6	Rivet	Copper alloy	Palting: Ni
5	Screw	Steel	Palting: Ni
4	Board lock	SPCC	Palting: Sn
3	Housing	PBT+30%GF	Color: black
2	Shell	SPCC	Palting: Ni
1	Terminal	Copper alloy	Contact area: G/F Solder area: Sn Under-plating: Ni
Item	Desc.	Material	Remark

VCOHU 苏州沃虎电子科技有限公司
Su Zhou Voohu Electronic Tech.Co.Ltd

TITLE: HD. D-SUB母头90度弯插,
8.89mm, 铆鱼叉, 锁4.8mm螺母 D版

SIZE
A4

UNITS
MM[INCH]

GENERAL TOLERANCES
UNLESS SPECIFIED

APPROVED BY:
Geoffrey.Song

PART NO.:
WHB04015611ADF4

SCALE
1:1

REV
A0

	$x \pm 0.35$
	$.x \pm 0.30$
	$.xx \pm 0.25$
	$.xxx \pm 0.10$

	$x^{\circ} \pm 3.0^{\circ}$
	$.x^{\circ} \pm 2.0^{\circ}$
	$.xx^{\circ} \pm 1.5^{\circ}$
	$.xxx^{\circ} \pm 1.0^{\circ}$

CHECKED BY:	Elvis.Song
DESIGNED BY:	Sunny.Xu

TEL: +86 400 1048 018

WEB: WWW.WOHU-TEK.COM

REMARK:

SHEET
1/1



1

2

3

4

5

6

7

8