
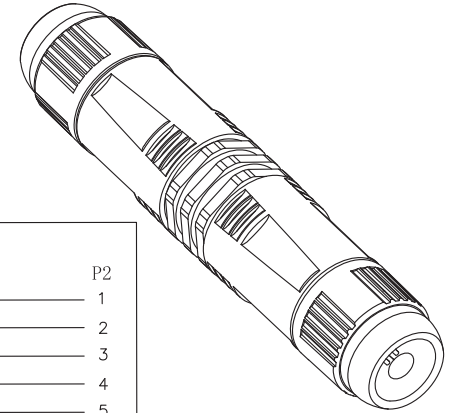


REACH & RoHS
COMPLIANT

RJ45 COUPLER Body

ELECTRICAL:

1. VOLTAGE RATING: 125 VAC RMS.
2. CURRENT RATING: 1.5 AMP.
3. CONTACT RESISTANCE : 30mΩ MAX.
4. INSULATION RESISTANCE: 1000MΩ MIN. AT 500V DC .
5. DIELECTRIC STRENGTH:1000V AC OR 1500V DC RMS AT 0.5mA
50Hz/60Hz FOR 1MINUTE.
6. Waterproof Rate : IP67.

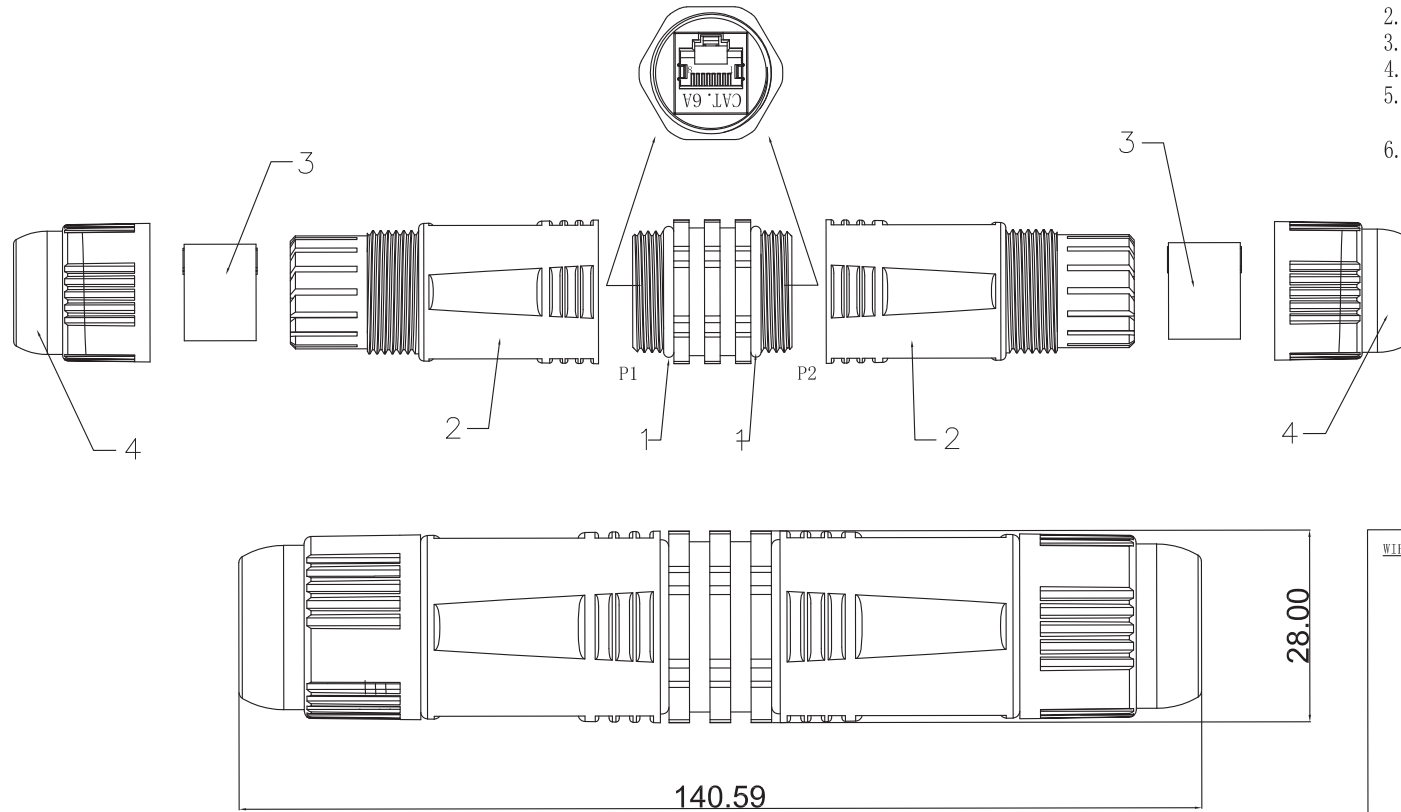

WIRE DIAGRAM

P1	P2
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
S	S

4	Seal Nut	Black PA66	pcs	2
4	Seal (OD)	Red Silicone Cable OD Range Ø7~Ø5.5	pcs	2
3	Body	Black PA66	pcs	2
2	Gasket	Green Fkm	pcs	2
1	COUPLER Body	Black RJ45 外PA66 /内PBT	pcs	1
NO.	TITLE	STANDARD	UNIT	QTY

VOOHU 苏州沃虎电子科技有限公司
Su Zhou Voohu Electronic Tech.Co.Ltd

TITLE: 全牙转接头
RJ45母转母两端带套件CAT6A

SIZE
A4

UNITS
MM[INCH]

GENERAL TOLERANCES
UNLESS SPECIFIED

APPROVED BY:
Geoffrey.Song

PART NO.:
WHPMWRJ5004

SCALE
1:1

REV
A0


x±0.35
.x±0.30

x°±3.0°
.x°±2.0°

CHECKED BY:
Elvis.Song

REMARK:

SHEET
1/1



.xx±0.25
.xxx±0.10

.xx°±1.5°
.xxx°±1.0°

DESIGNED BY:
Sunny.Xu

TEL: +86 400 1048 018

WEB: WWW.WOHU-TEK.COM