




REACH & RoHS
COMPLIANT




FRONT VIEW

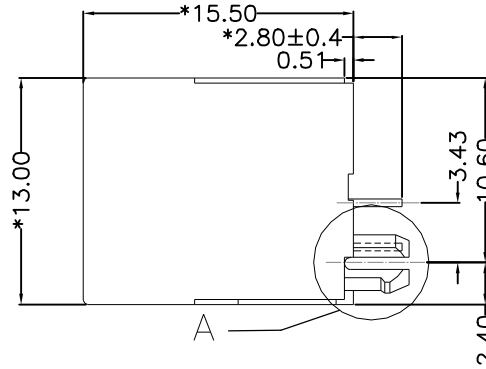


RIGHT SIDE VIEW

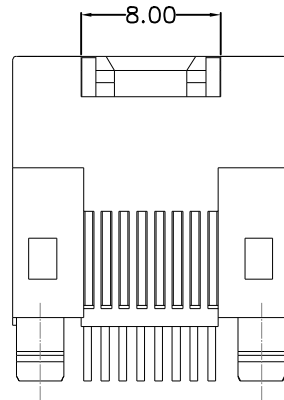

BOTTOM VIEW

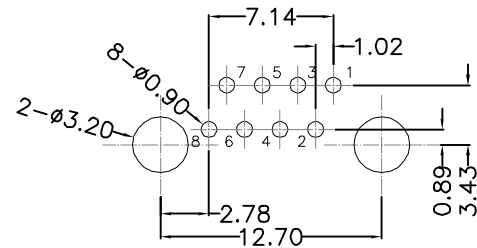

RECOMMENDED PCB LAYOUT
VIEWED FROM COMPONENT SIDE

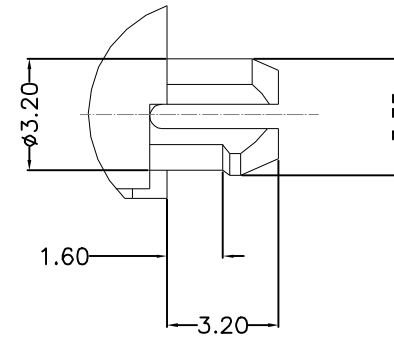

A(2:1)

MATERIAL:

HOUSING: PBT,UL94V-0,BLACK.

TERMINAL: PHOSPHOR BRONZE Ø=0.46MM, G/FU" GOLD PLATING.

MACHANICAL:

DURABILITY: 750 CYCLES MIN,12.5MM/MINUTE.

INSERTION FORCE: 2.2KG.F MAX.

RETENTION STRENGTH : 7.7KG.F BETWEEN JACK AND PLUG.

OPERATING TEMPERATURE: -40℃~+85℃.

STORAGE TEMPERATURE: -40℃~+85℃.

ALL CRITICAL DIMENSIONS WITH "°"

ELECTRICAL:

VOLTAGE: 125 VOLTS AC.

CURRENT RATING : 1.5AMP.

DIELECTRIC STRENGTH: 1000 VAC RMS 50HZ OR 60HZ,1MIN.


INSULATION RESISTANCE: 500 MEGA OHMS MIN. INITIAL

AFTER 500V DC FOR 1 MINUTE.

CONTACT RESISTANCE: SINGLE TERMINAL 30 MILLIOHMS MAX.

INITIAL 50 MILLIOHMS MAX. AFTER

DURABILITY TEST.

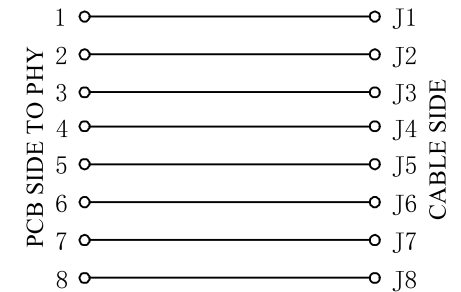

VOOHU 苏州沃虎电子科技有限公司
Su Zhou Voohu Electronic Tech.Co.Ltd

TEL: +86 400 1048 018

WEB: WWW.VOOHU.CN

TITLE:

52T 1X1 8P8C无耳 全塑

PART NO.:

SYT52T1188IWA1DY1

REMARK:

SIZE

A4

SCALE

1:1

SHEET


1/1

UNITS

MM[INCH]

REV

A0



GENERAL TOLERANCES

UNLESS SPECIFIED

xx±0.35

.xx±0.30

.xx±0.25

.xxx±0.10

x°±3.0°

.x°±2.0°

.xx°±1.5°

.xxx°±1.0°

APPROVED BY:

Geoffrey.Song

CHECKED BY:

Elvis.Song

DESIGNED BY:

Sunny.Xu