

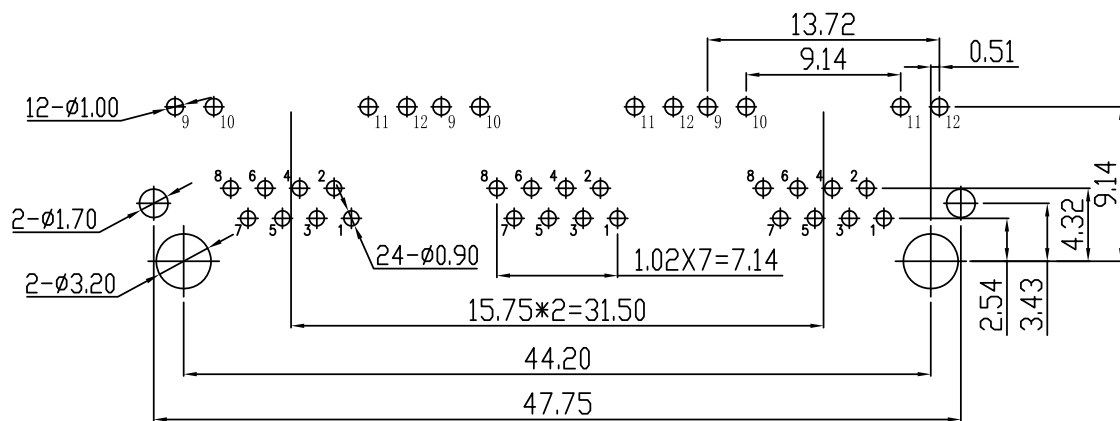
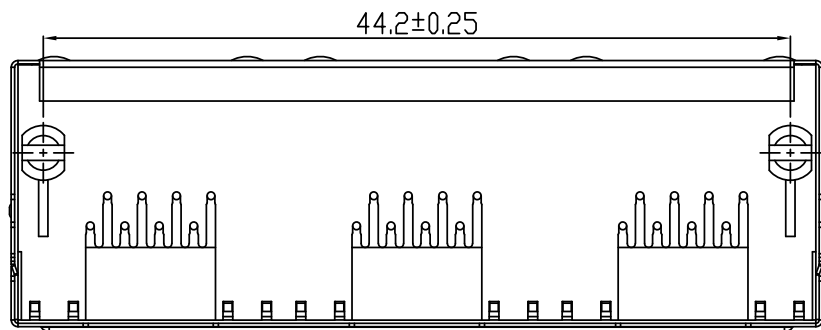
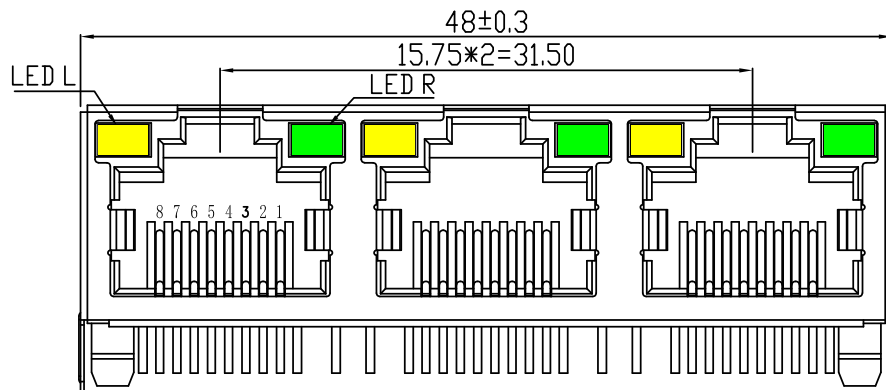


REACH & RoHS
COMPLIANT



PC Board Layout

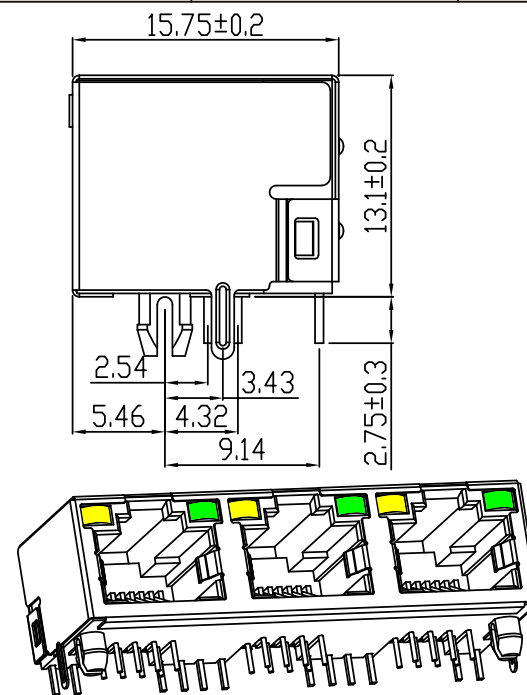

NOTES:

ELECTRICAL:

1. VOLTAGE RATING: 125V AC.
2. CURRENT RATING: 1.5A.
3. CONTACT RESISTANCE: 30 mΩ MAX.
4. INSULATION RESISTANCE: 500 MΩ MIN @ 500V DC.
5. DIELECTRIC STRENGTH: 1000V AC 50Hz or 60Hz, 1MIN.

MECHANICAL:

1. INSERT MATERIAL: UL94V-0.
2. CONTACT MATERIAL: Ø0.46mm C51000(QSn4-0.3)PHOSPHOR BRONZE GOLD PLATING OVER NICKEL.
3. SHIELD: 0.20mm THICKNESS H65Y BRASS NICKEL PLATED.
4. MATING/UNMATING FORCE: 20N Max.
5. RETENTION STRENGTH: 50N pendant 60±5s.
6. OPERATING LIFE: 750 CYCLES MIN.

ENVIRONMENTAL:

1. STORAGE: -40℃ ~ +85℃ RELATIVE HUMIDITY<70%.
2. OPERATION: -40℃ ~ +85℃.

TITLE:

56S LED 1X3 8P8C

SIZE

A4

UNITS

MM[INCH]

GENERAL TOLERANCES

UNLESS SPECIFIED

APPROVED BY:

Geoffrey.Song

PART NO.:

WH56I338820111101

SCALE

1:1

REV

A0

x±0.35

.x±0.30

x°±3.0°

.x°±2.0°

CHECKED BY:

Elvis.Song

REMARK:

D型(无后背脚)(左黄右绿)

SHEET

1/1



.xx±0.25

.xxx±0.10

.xx°±1.5°

.xxx°±1.0°

DESIGNED BY:

Sunny.Xu

VOOHU 苏州沃虎电子科技有限公司
Su Zhou Voohu Electronic Tech.Co.Ltd

TEL: +86 400 1048 018

WEB: WWW.VOOHU.CN