



REACH & RoHS
COMPLIANT

a. Mechanical

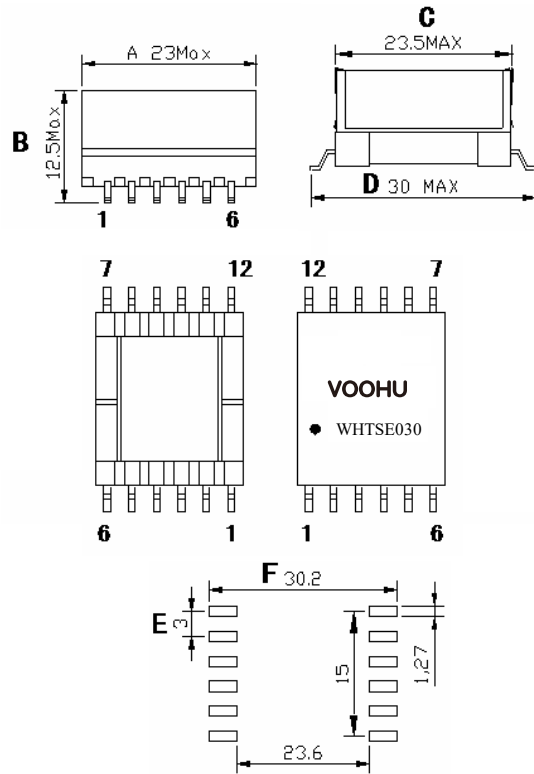

b. Schematics

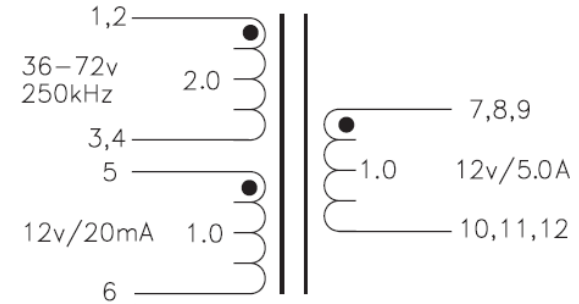

RoHs compliance product

Operating temperature range:-40°C to +85°C

Storage temperature range:0°C to +30°C

NOTE:

1、Dimensions:mm;

2、Unless otherwise specified,tolerances:±0.25(mm);

Electrical Specifications @ 25°C

Part Number	OCL (10KHz, 0.1V)	LL (100KHz, 0.1V)	DCR (mΩ MAX)			Turn Ratio (15.7KHz,0.1V)		Hi-Pot VAC
	1,2-3,4	1,2-3,4 (tie ALL PIN)	1,2-3,4	5-6	12,11,10-9,8,7	1,2-3,4:5-6	1,2-3,4:3-12,11,10-9,8,7	PRI TO SEC (5mA/3S)
WHTSE030	100uH±12%	1.0 uH max	80	680	20	2:1	2:1	1500

TITLE:
变压器/TRANSFORMER

SIZE
A4

UNITS
MM[INCH]

GENERAL TOLERANCES
UNLESS SPECIFIED

APPROVED BY:
Geoffrey.Song

PART NO.:
WHTSE030

SCALE
1:1

REV
A0


x±0.35
.x±0.30

x°±3.0°
.x°±2.0°

CHECKED BY:
Elvis.Song

REMARK:

SHEET
1/1



.xx±0.25
.xxx±0.10

.xx°±1.5°
.xxx°±1.0°

DESIGNED BY:
Sunny.Xu

VOOHU 苏州沃虎电子科技有限公司
Su Zhou Voohu Electronic Tech.Co.Ltd

TEL: +86 400 1048 018

WEB: WWW.WOHU-TEK.COM