
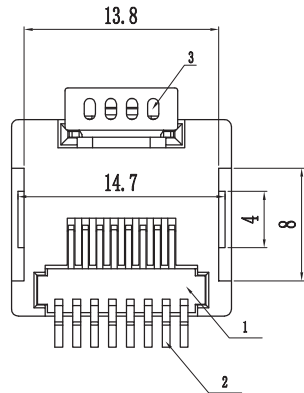
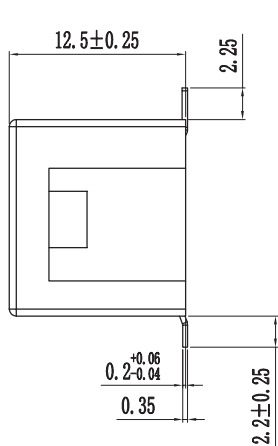
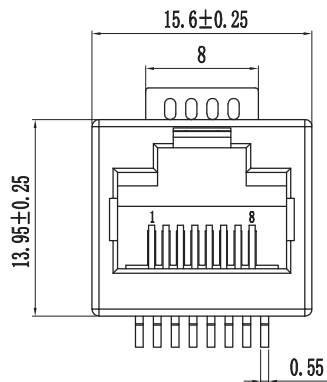



REACH & RoHS
COMPLIANT

PC Board Layout

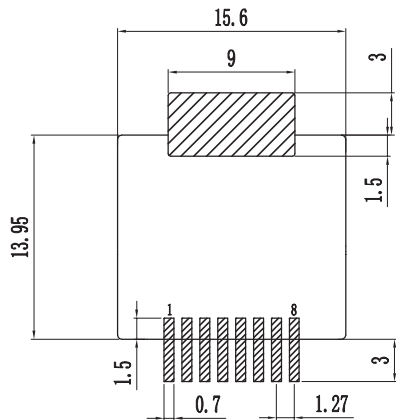

技术参数 (SPECIFICATIONS)
温度范围 (Temperature Range) : -40° C TO 70° C、
额定电压 (rated voltage) : 125V
额定电流 (Rated current) : 1.5A
接触电阻 (contact resistance) : 30mΩ MAX
绝缘电阻 (insulation resistance) : 500MΩ MIN
耐压 (DIELECTRIC WITHSTANDING VOLTAGE) :1000Vac RMS 50Hz 1MIN.、
拔插力 (MATING AND UNMATING FORCE):3-20N
寿命 (DURRABILITY) :750 CYCLES MIN.

3	定位片	H62	1	CT	
2	插针	PHOSPHOR BRONZE	8	1U"	
1	塑座	LCP	1	BLACK	
序号	名称	材料	数量	镀层/颜色	备注

VOOHU 苏州沃虎电子科技有限公司
Su Zhou Voohu Electronic Tech.Co.Ltd

TEL: +86 400 1048 018

WEB: WWW.WOHU-TEK.COM


TITLE:
5445 1x1 8P8C SMT 全塑
PART NO.:
SYT52F1188IWW5SB4ML078

REMARK:

SIZE
A4
UNITS
MM[INCH]

SACLE
1:1
REV
A0

SHEET
1/1



GENERAL TOLERANCES
UNLESS SPECIFIED

x±0.35	x°±3.0°
.x±0.30	.x°±2.0°
.xx±0.25	.xx°±1.5°
.xxx±0.10	.xxx°±1.0°

APPROVED BY:
Geoffrey.Song

CHECKED BY:
Elvis.Song

DESIGND BY:
Sunny.Xu