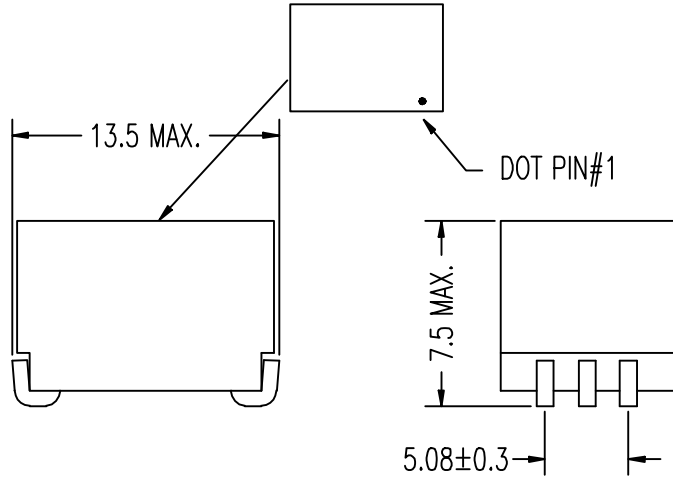


TOLERANCE : $\pm 0.3\text{mm}$

ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-3 = 4-6 = $1.62\text{ K}\Omega \pm 15\%$
- INDUCTANCE PARALLEL (@1KHz, 0.1Vrms) : PIN 1-3 = 25H MIN.
- INSERTION LOSS (@2KHz, 1Vrms 4-6 W/H 10K Ω) :
PIN 1-3 = 2dB MAX.
- FREQ. RESP. (@REF 2KHz) : @200Hz = $\pm 0.5\text{dB}$.
@4KHz = $\pm 0.2\text{dB}$.
- RETURN LOSS (@REF 10K Ω) : @200Hz = 14dB MIN.
@4KHz = 14dB MIN.
- TURN RATIO (@7.9KHz, 1Vrms) : PIN 1-3 : PIN 6-4 = $1 \pm 1\%$
- HI-POT (@3750VAC, 1mA, 2SEC) : PRI-SEC
- RoHS COMPLIANCE.

VOOHU 苏州沃虎电子科技有限公司
Su Zhou Voohu Electronic Tech.Co.Ltd

TITLE:
10K:10K TRANSFORMER

SIZE
A4

UNITS
MM[INCH]

GENERAL TOLERANCES
UNLESS SPECIFIED

APPROVED BY:
Geoffrey.Song

PART NO.:
WHTT6016

SACLE
1:1

REV
A0

$x \pm 0.35$
 $.x \pm 0.30$

$x^\circ \pm 3.0^\circ$
 $.x^\circ \pm 2.0^\circ$

CHECKED BY:
Elvis.Song

TEL: +86 400 1048 018

WEB: WWW.WOHU-TEK.COM

REMARK:

SHEET
1/1



$.xx \pm 0.25$
 $.xxx \pm 0.10$

$.xx^\circ \pm 1.5^\circ$
 $.xxx^\circ \pm 1.0^\circ$

DESIGND BY:
Sunny.Xu