




REACH & RoHS
COMPLIANT

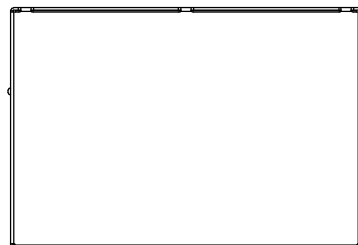


TOP VIEW




LEFT SIDE VIEW

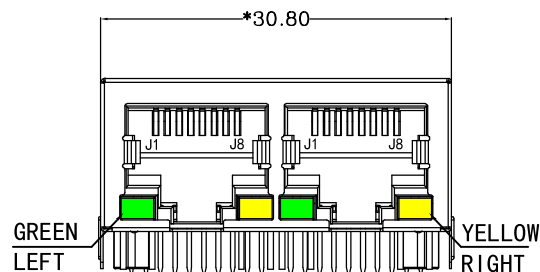


FRONT VIEW



RIGHT SIDE VIEW

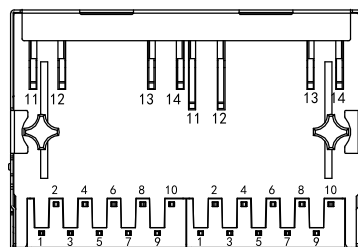

BOTTOM VIEW

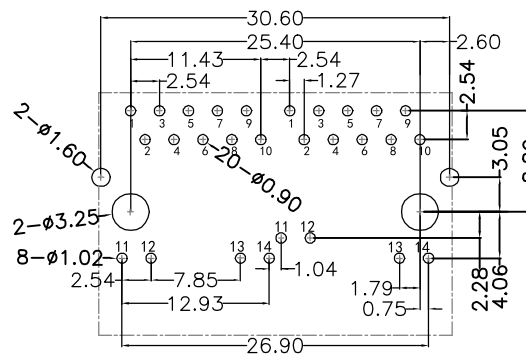

RECOMMENDED PCB LAYOUT
VIEWED FROM COMPONENT SIDE

MATERIAL:

HOUSING: LCP,UL94V-0,BLACK.
TERMINALS BRACKET: LCP,UL94V-0,BLACK.
SHIELD: C2680,T=0.20MM,NICKEL PLATING ON ALL AREA.
TERMINAL: PHOSPHOR BRONZE C5210,T=0.35MM,
30U" GOLD PLATING ON CONTACT AREA.

MECHANICAL:

DURABILITY: 750 CYCLES MIN.
MATING FORCE: 23N MAX.
OPERATING TEMPERATURE: -40°C~+85°C.
STORAGE TEMPERATURE: -40°C~+85°C.
ALL CRITICAL DIMENSIONS WITH "*"

TITLE:

TAB-DOWN 1X2 10G

SIZE
A4

UNITS
MM[INCH]

GENERAL TOLERANCES
UNLESS SPECIFIED

APPROVED BY:

Geoffrey.Song

PART NO.:

SYT112T010AB2A10DB

SCALE
1:1

REV
A0

.x±0.35
.x±0.30

x°±3.0°
.x°±2.0°

CHECKED BY:

Elvis.Song

REMARK:

SHEET
1/4



.xx±0.25
.xxx±0.10

.xx°±1.5°
.xxx°±1.0°

DESIGNED BY:

Sunny.Xu


VOOHU 苏州沃虎电子科技有限公司
Su Zhou Voohu Electronic Tech.Co.Ltd

TEL: +86 400 1048 018

WEB: WWW.VOOHU.CN


REACH & RoHS
COMPLIANT

RECOMMENDED PANEL CUTOUT (REFERENCE ONLY) :

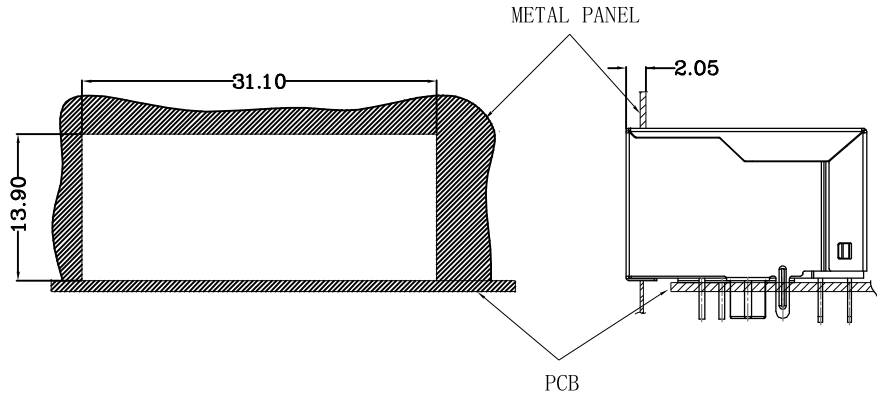

UNIT: MM / INCH
TOLERANCES: ± 0.10 / 0.004
REFERENCE ONLY

KEEP-OUT AREA (COMPONENT SIDE VIEW) :

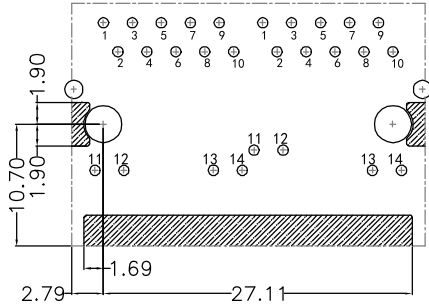

PLUG-IN SIDE

UNIT: MM / INCH
TOLERANCES: ± 0.10 / 0.004

VOOHU 苏州沃虎电子科技有限公司
Su Zhou Voohu Electronic Tech.Co.Ltd

TEL: +86 400 1048 018

WEB: WWW.VOOHU.CN

TITLE:
TAB-DOWN 1X2 10G

PART NO.:
SYT112T010AB2A10DB

REMARK:


SIZE
A4

SCALE
1:1

SHEET
2/4

UNITS
MM[INCH]

REV
A0



GENERAL TOLERANCES
UNLESS SPECIFIED


$x \pm 0.35$
 $.x \pm 0.30$
 $.xx \pm 0.25$
 $.xxx \pm 0.10$

$x^\circ \pm 3.0^\circ$
 $.x^\circ \pm 2.0^\circ$
 $.xx^\circ \pm 1.5^\circ$
 $.xxx^\circ \pm 1.0^\circ$

APPROVED BY:
Geoffrey.Song

CHECKED BY:
Elvis.Song

DESIGNED BY:
Sunny.Xu

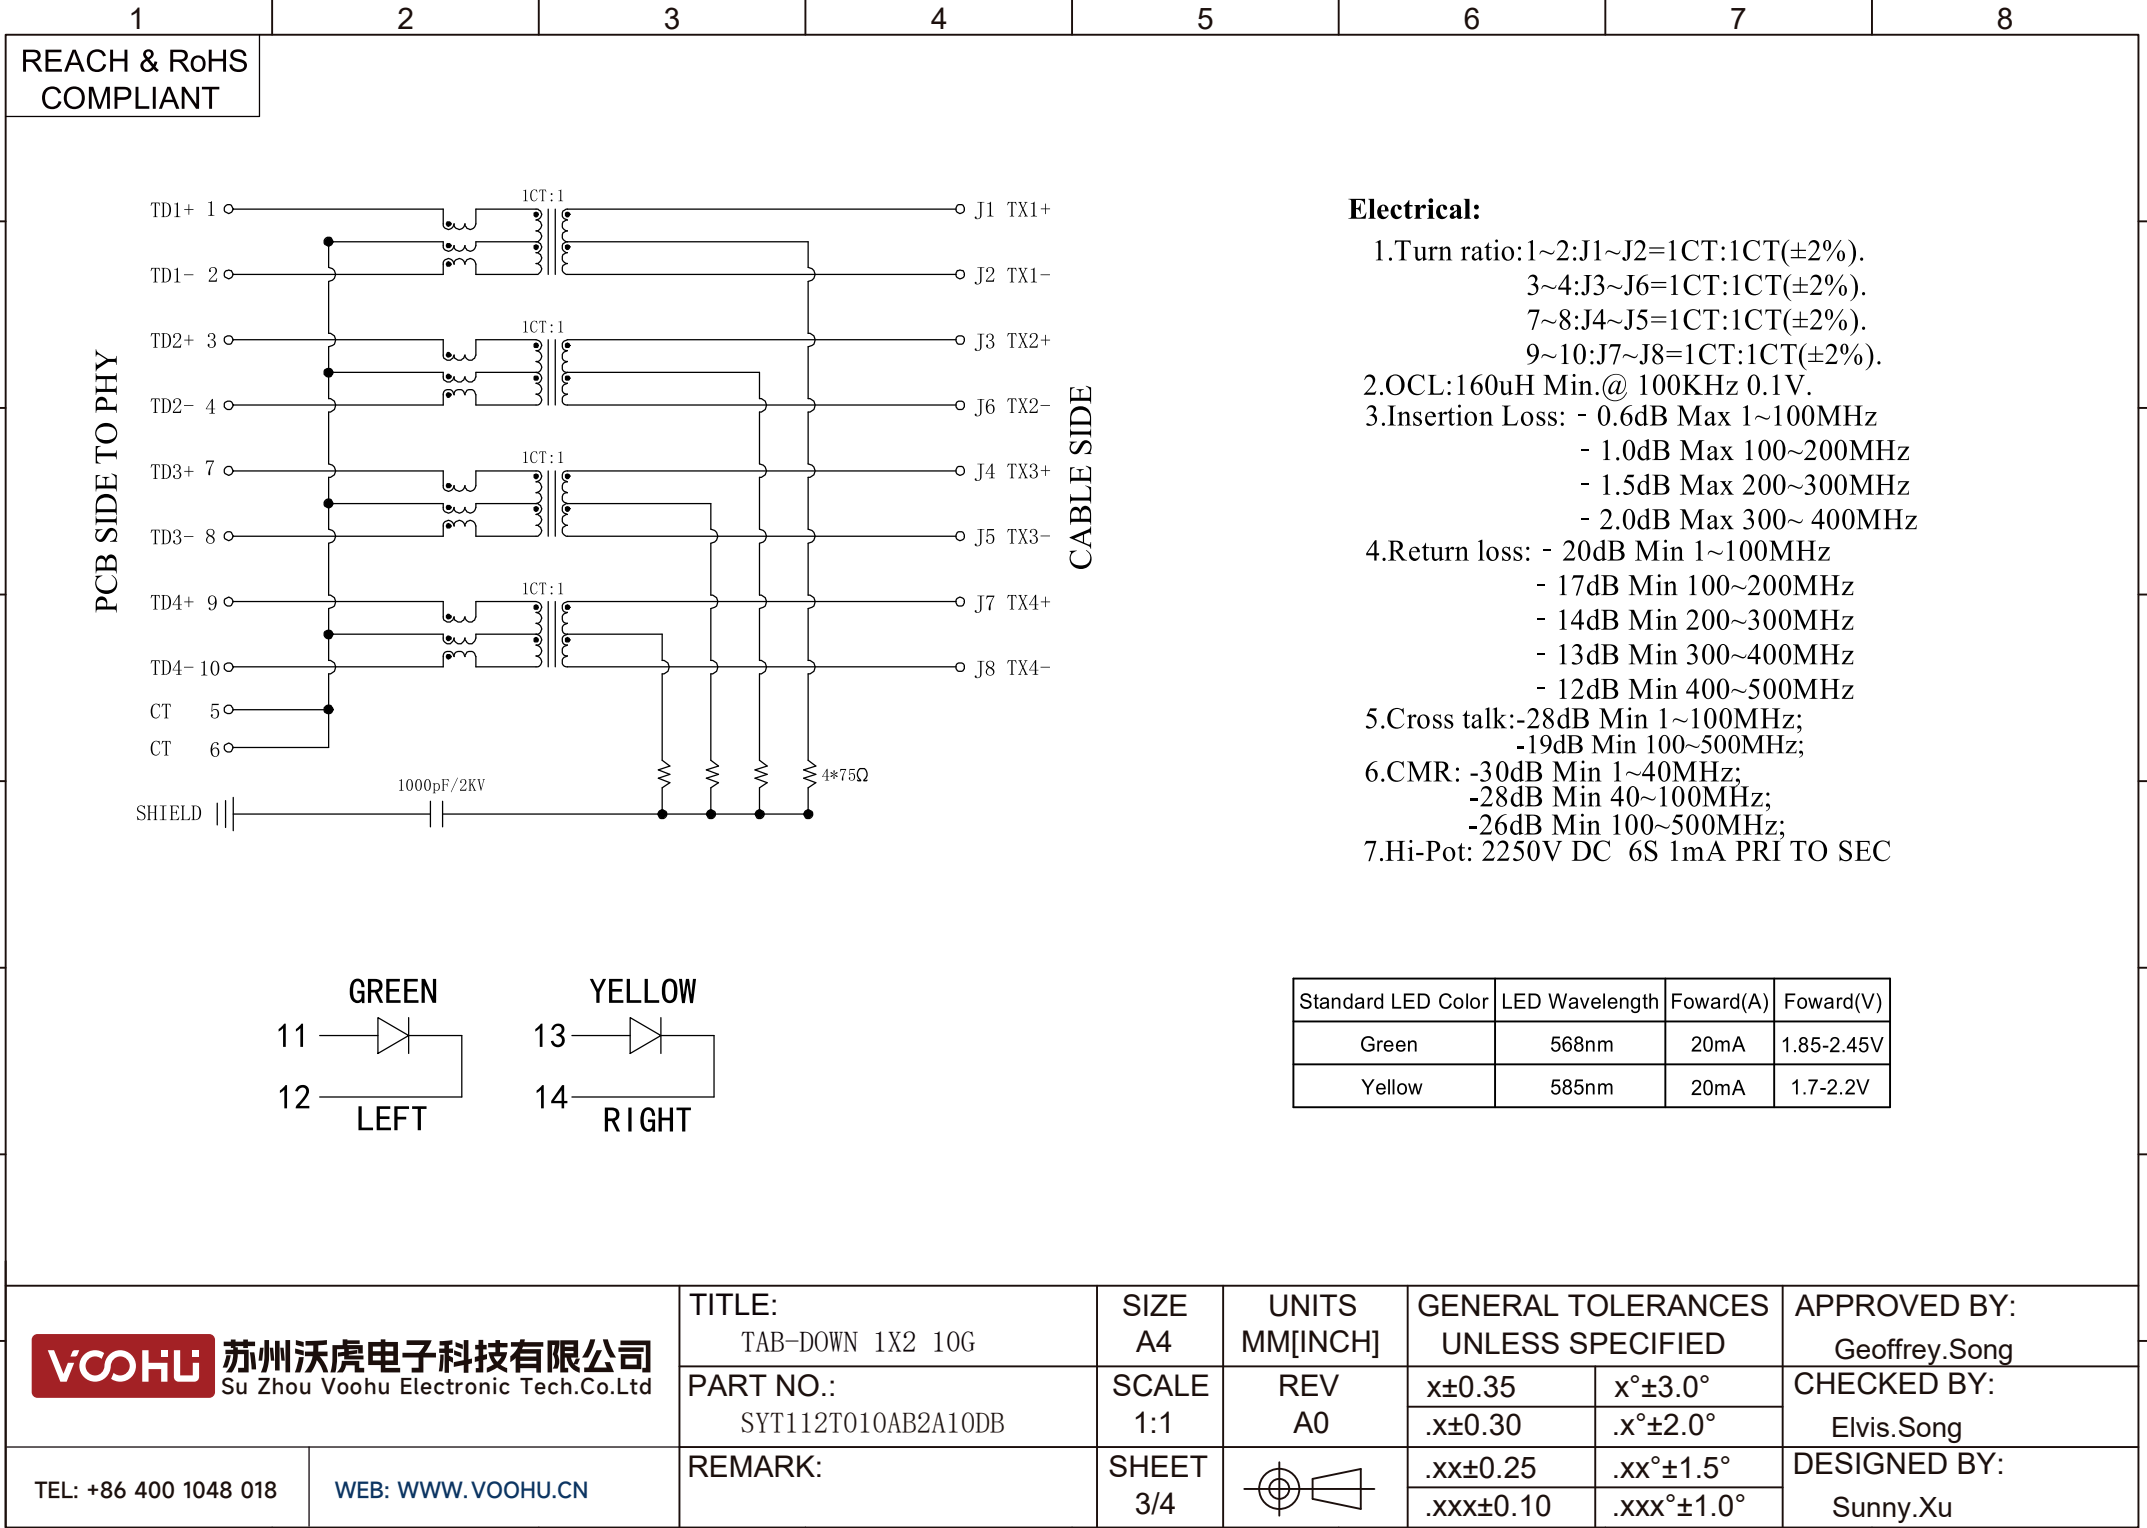

Electrical:

1.Turn ratio:1~2:J1~J2=1CT:1CT(±2%).
3~4:J3~J6=1CT:1CT(±2%).
7~8:J4~J5=1CT:1CT(±2%).
9~10:J7~J8=1CT:1CT(±2%).

2.OCL:160uH Min.@ 100KHz 0.1V.

3.Insertion Loss: - 0.6dB Max 1~100MHz
- 1.0dB Max 100~200MHz
- 1.5dB Max 200~300MHz
- 2.0dB Max 300~ 400MHz

4.Return loss: - 20dB Min 1~100MHz
- 17dB Min 100~200MHz
- 14dB Min 200~300MHz
- 13dB Min 300~400MHz
- 12dB Min 400~500MHz

5.Cross talk:-28dB Min 1~100MHz;
-19dB Min 100~500MHz;

6.CMR: -30dB Min 1~40MHz;
-28dB Min 40~100MHz;
-26dB Min 100~500MHz;

7.Hi-Pot: 2250V DC 6S 1mA PRI TO SEC

Standard LED Color	LED Wavelength	Foward(A)	Foward(V)
Green	568nm	20mA	1.85-2.45V
Yellow	585nm	20mA	1.7-2.2V

VOOHU

苏州沃虎电子科技有限公司

Su Zhou Voohu Electronic Tech.Co.Ltd

TEL: +86 400 1048 018

WEB: WWW.VOOHU.CN

TITLE:
TAB-DOWN 1X2 10G

PART NO.:
SYT112T010AB2A10DB

REMARK:

SIZE
A4

SCALE
1:1

SHEET
3/4

UNITS
MM[INCH]

REV
A0

GENERAL TOLERANCES
UNLESS SPECIFIED

.xx±0.25

.xxx±0.10

x°±3.0°

.x°±2.0°

.xx°±1.5°

.xxx°±1.0°

APPROVED BY:
Geoffrey.Song

CHECKED BY:
Elvis.Song

DESIGNED BY:
Sunny.Xu

1

2

3

4

5

6

7

8

H

G

F

E

D


C

B

A

REACH & RoHS
COMPLIANT

PROFILE OF WAVE SOLDER

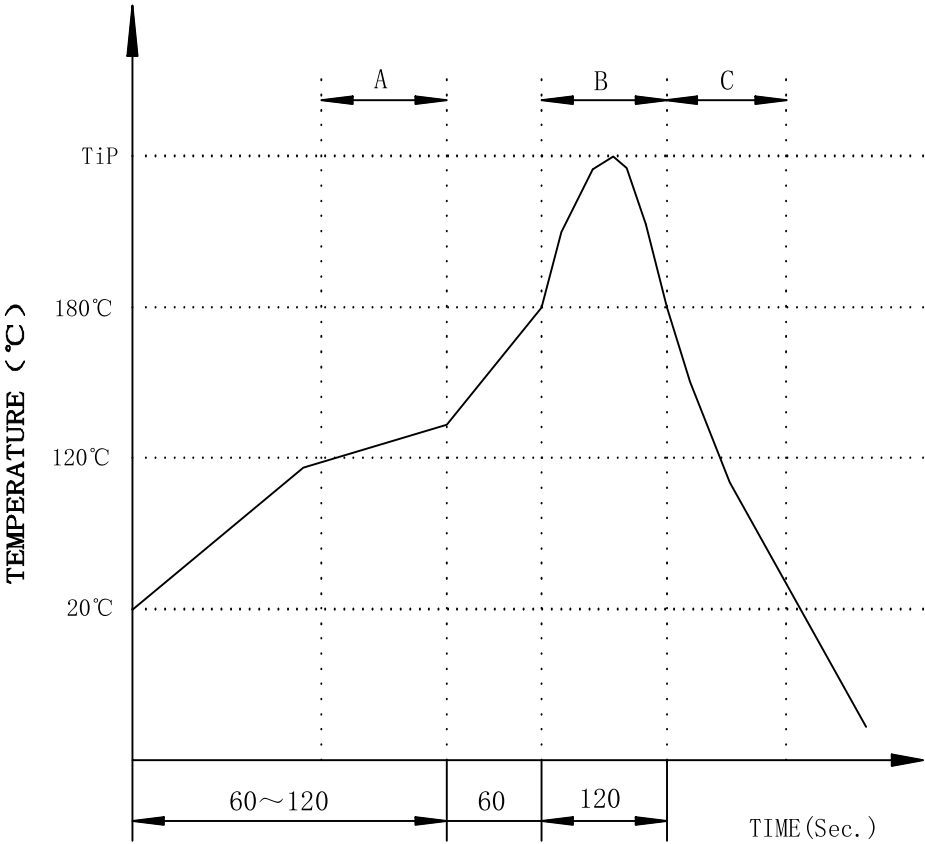

VOOHU 苏州沃虎电子科技有限公司 Su Zhou Voohu Electronic Tech.Co.Ltd		TITLE: TAB-DOWN 1X2 10G	SIZE A4	UNITS MM[INCH]	GENERAL TOLERANCES UNLESS SPECIFIED		APPROVED BY: Geoffrey.Song
		PART NO.: SYT112T010AB2A10DB	SCALE 1:1	REV A0	x±0.35 .x±0.30	x°±3.0° .x°±2.0°	CHECKED BY: Elvis.Song
TEL: +86 400 1048 018	WEB: WWW.VOOHU.CN	REMARK:	SHEET 4/4		.xx±0.25 .xxx±0.10	.xx°±1.5° .xxx°±1.0°	DESIGNED BY: Sunny.Xu