
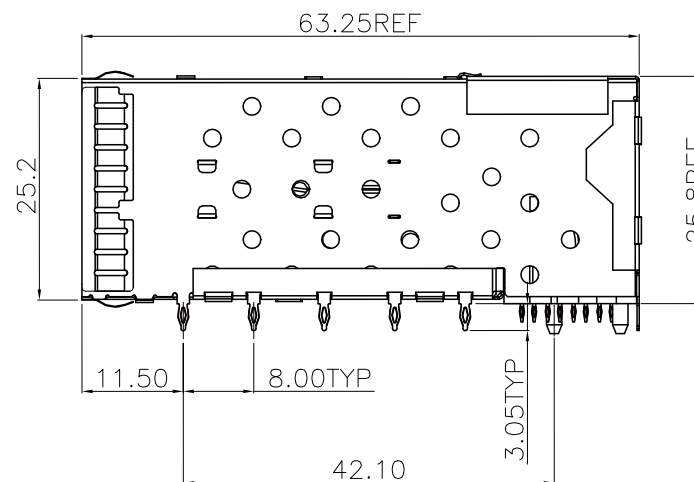


REACH & RoHS
COMPLIANT

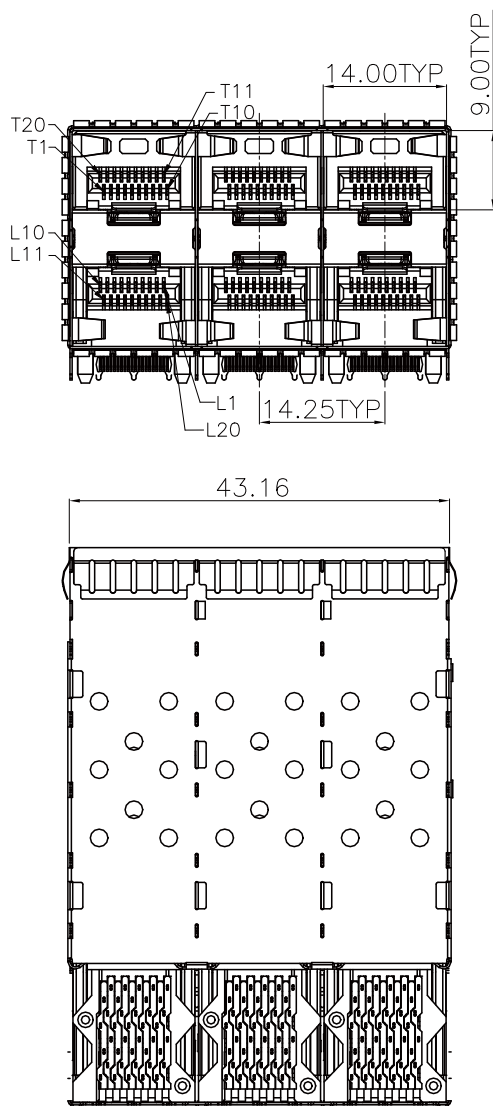

NOTES:

1.MATERIAL:

CAGE: COPPER ALLOY, THICKNESS: 0.25mm
CONNECTOR HOUSING: GLASS FILLED THERMOPLASTIC;
UL 94V-0 COLOR: BLACK
TERMINALS: PHOSPHOR BRONZE

2.FINISH

TERMINALS CONTACT AREA: PLATED-GOLD;
SOLDER TERMINAL AREA: PLATED-TIN.

3.EMI: C5210 T=0.08mm

VOOHU 苏州沃虎电子科技有限公司
Su Zhou Voohu Electronic Tech.Co.Ltd

TITLE:
SFP+ 2*3 -A-B1

PART NO.:
WH81-123-Y0007-1

REMARK:

SIZE
A4

SACLE
1:1

SHEET
1/3

UNITS
MM[INCH]

REV
A0



GENERAL TOLERANCES
UNLESS SPECIFIED

$x \pm 0.35$
 $.x \pm 0.30$
 $.xx \pm 0.25$
 $.xxx \pm 0.10$

$x^\circ \pm 3.0^\circ$
 $.x^\circ \pm 2.0^\circ$
 $.xx^\circ \pm 1.5^\circ$
 $.xxx^\circ \pm 1.0^\circ$

APPROVED BY:
Geoffrey.Song


CHECKED BY:
Elvis.Song

DESIGN BY:
Sunny.Xu



TEL: +86 400 1048 018

WEB: WWW.VOOHU.CN

REACH & RoHS
COMPLIANT

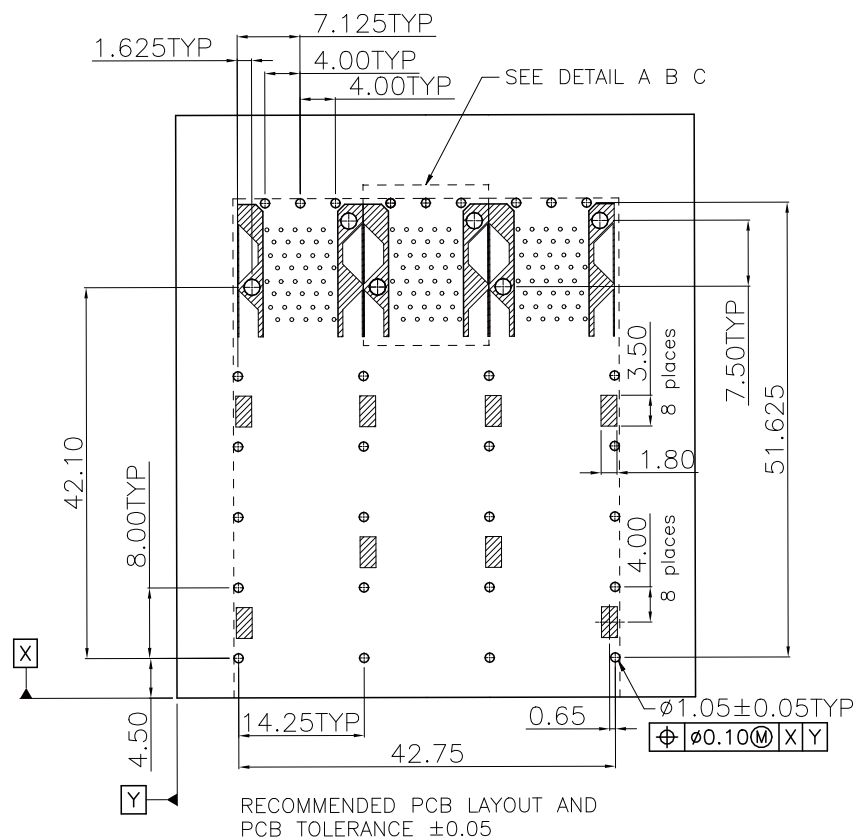

1. RECOMMENDED PCB THICKNESS:2.36
(MINIMUM PCB THICKNESS:1.57)

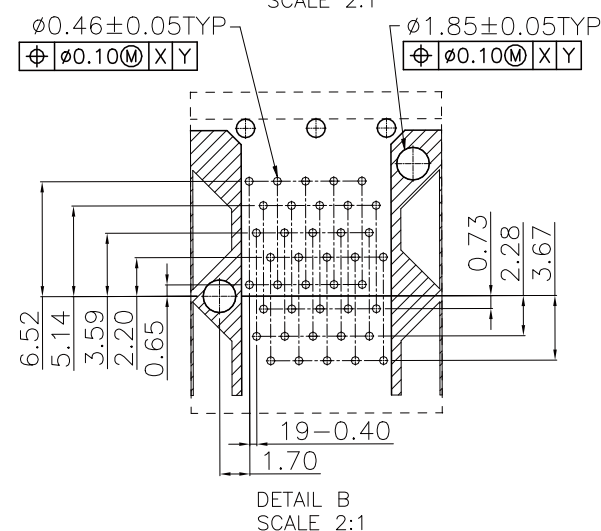

VOOHU 苏州沃虎电子科技有限公司
Su Zhou Voohu Electronic Tech.Co.Ltd

TEL: +86 400 1048 018

WEB: WWW.VOOHU.CN

TITLE:
SFP+ 2*3 -A-B1

PART NO.:
WH81-123-Y0007-1

REMARK:


SIZE
A4

SACLE
1:1

SHEET
2/3

UNITS
MM[INCH]

REV
A0



GENERAL TOLERANCES
UNLESS SPECIFIED

$x \pm 0.35$
 $.x \pm 0.30$
 $.xx \pm 0.25$
 $.xxx \pm 0.10$

$x^\circ \pm 3.0^\circ$
 $.x^\circ \pm 2.0^\circ$
 $.xx^\circ \pm 1.5^\circ$
 $.xxx^\circ \pm 1.0^\circ$

APPROVED BY:
Geoffrey.Song

CHECKED BY:
Elvis.Song

DESIGND BY:
Sunny.Xu



WEB: WWW.VOOHU.CN

DESIGND BY:	Sunny.Xu
-------------	----------

