
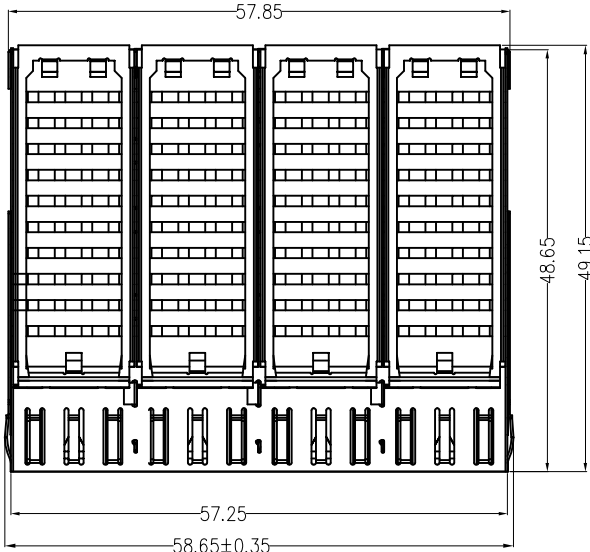
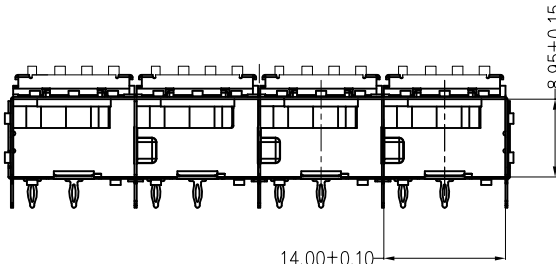
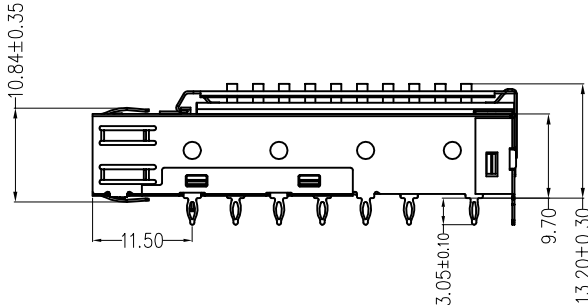

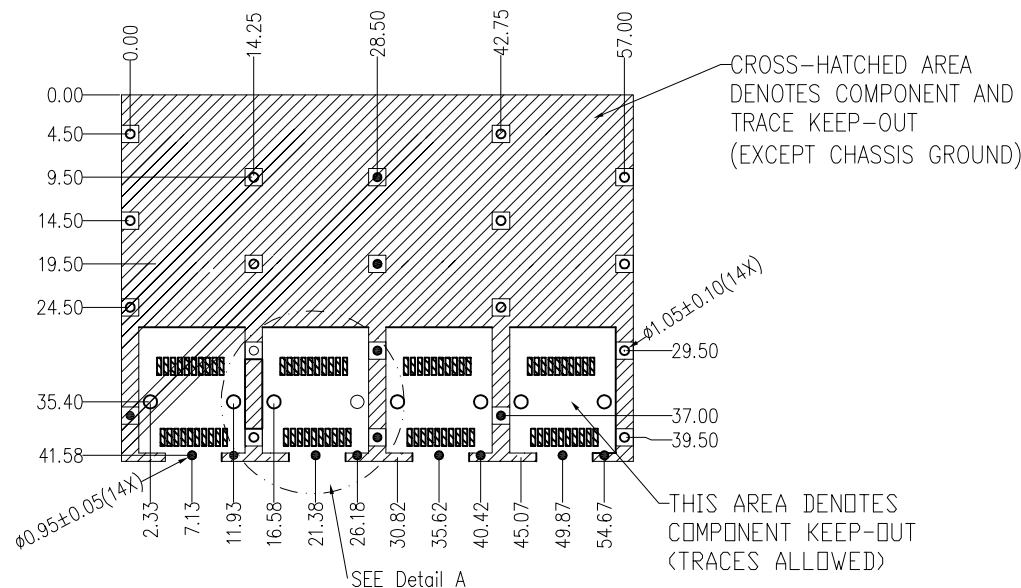
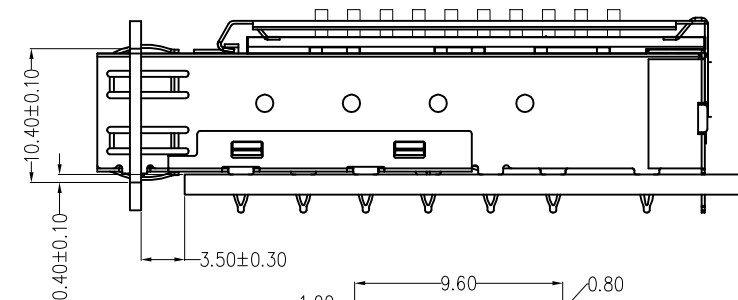


1	2	3	4	5	6	7	8
REACH & RoHS COMPLIANT							
		NOTES: 1, DESCRIPTION Q'ty MATERIAL PLATING 01 SFP CAGE (Non-Logo) 1PCS COPPER ALLOY T=0.25 N/A 02 SFP HEAT SINK 4PCS AL Ni FOR ALL 03 SFP HEAT SINK CLIP 4PCS SUS 301½H T=0.25mm N/A 2, TEMPERATURE: OPERATION: -40°C~+85°C STORAGE: -55°C~+105°C 3, INSERTION AND EXTRACTION FORCE: 40N MAX & 11.5 MAX 4, DURABILITY: 100 CYCLES MIN.					
							
							
 苏州沃虎电子科技有限公司 Su Zhou Voohu Electronic Tech.Co.Ltd		TITLE: SFP 1X4 CAGE 带散热器(高13.20)	SIZE A4	UNITS MM[INCH]	GENERAL TOLERANCES UNLESS SPECIFIED		APPROVED BY: Geoffrey.Song
		PART NO.: WHSFP01014W036	SCALE 1:1	REV A0	x±0.35	x°±3.0°	CHECKED BY: Elvis.Song
TEL: +86 400 1048 018 WEB: WWW.VOOHU.CN		REMARK:	SHEET 1/2		.xx±0.25	.xx°±1.5°	DESIGNED BY: Sunny.Xu
					.xxx±0.10	.xxx°±1.0°	

REACH & RoHS
COMPLIANT

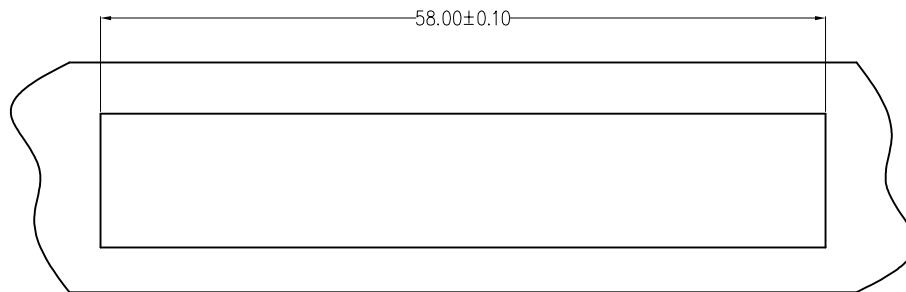

PCB LAYOUT THICKNESS=3.0MM (TOP VIEW)

SEE Detail A
SCALE 2.5:1

VOOHU 苏州沃虎电子科技有限公司
Su Zhou Voohu Electronic Tech.Co.Ltd

TITLE: SFP 1X4 CAGE
带散热器(高13.20)

PART NO.:
WHSFP01014W036

REMARK:


SIZE
A4

SCALE
1:1

SHEET
2/2

UNITS
MM[INCH]

REV
A0



GENERAL TOLERANCES
UNLESS SPECIFIED

$x \pm 0.35$
 $.x \pm 0.30$
 $.xx \pm 0.25$
 $.xxx \pm 0.10$

$x^\circ \pm 3.0^\circ$
 $.x^\circ \pm 2.0^\circ$
 $.xx^\circ \pm 1.5^\circ$
 $.xxx^\circ \pm 1.0^\circ$

APPROVED BY:
Geoffrey.Song

CHECKED BY:
Elvis.Song

DESIGNED BY:
Sunny.Xu

TEL: +86 400 1048 018

WEB: WWW.VOOHU.CN