




REACH & RoHS
COMPLIANT




TOP VIEW

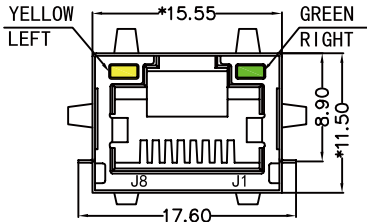


FRONT VIEW



RIGHT SIDE VIEW



BOTTOM VIEW

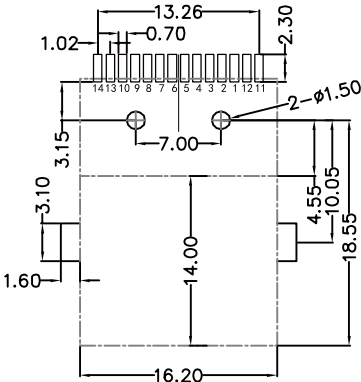

RECOMMENDED PCB LAYOUT
VIEWED FROM COMPONENT SIDE

MATERIAL:

HOUSING: LCP,UL94V-0,BLACK.
TERMINALS BRACKET: LCP,UL94V-0,BLACK.
SHIELD: C2680,T=0.20MM,NICKEL PLATING ON ALL AREA.
TERMINAL: PHOSPHOR BRONZE C5210,T=0.35MM,
6U" GOLD PLATING ON CONTACT AREA.

MECHANICAL:

DURABILITY: 750 CYCLES MIN.
MATING FORCE: 23N MAX.
OPERATING TEMPERATURE: -40°C~+85°C.
STORAGE TEMPERATURE: -40°C~+85°C.
ALL CRITICAL DIMENSIONS WITH "*"

VOOHU 苏州沃虎电子科技有限公司
Su Zhou Voohu Electronic Tech.Co.Ltd

TEL: +86 400 1048 018

WEB: WWW.VOOHU.CN

TITLE:
TAB-UP 1X1 1000BASE 贴片
PART NO.:
SYT211Q077DB1A7CBS057


REMARK:

SIZE
A4
SACLE
1:1
SHEET
1/3

UNITS
MM[INCH]
REV
A0


GENERAL TOLERANCES
UNLESS SPECIFIED
x±0.35
.x±0.30
.xx±0.25
.xxx±0.10
x°±3.0°
.x°±2.0°
.xx°±1.5°
.xxx°±1.0°

APPROVED BY:
Geoffrey.Song
CHECKED BY:
Elvis.Song
DESIGND BY:
Sunny.Xu

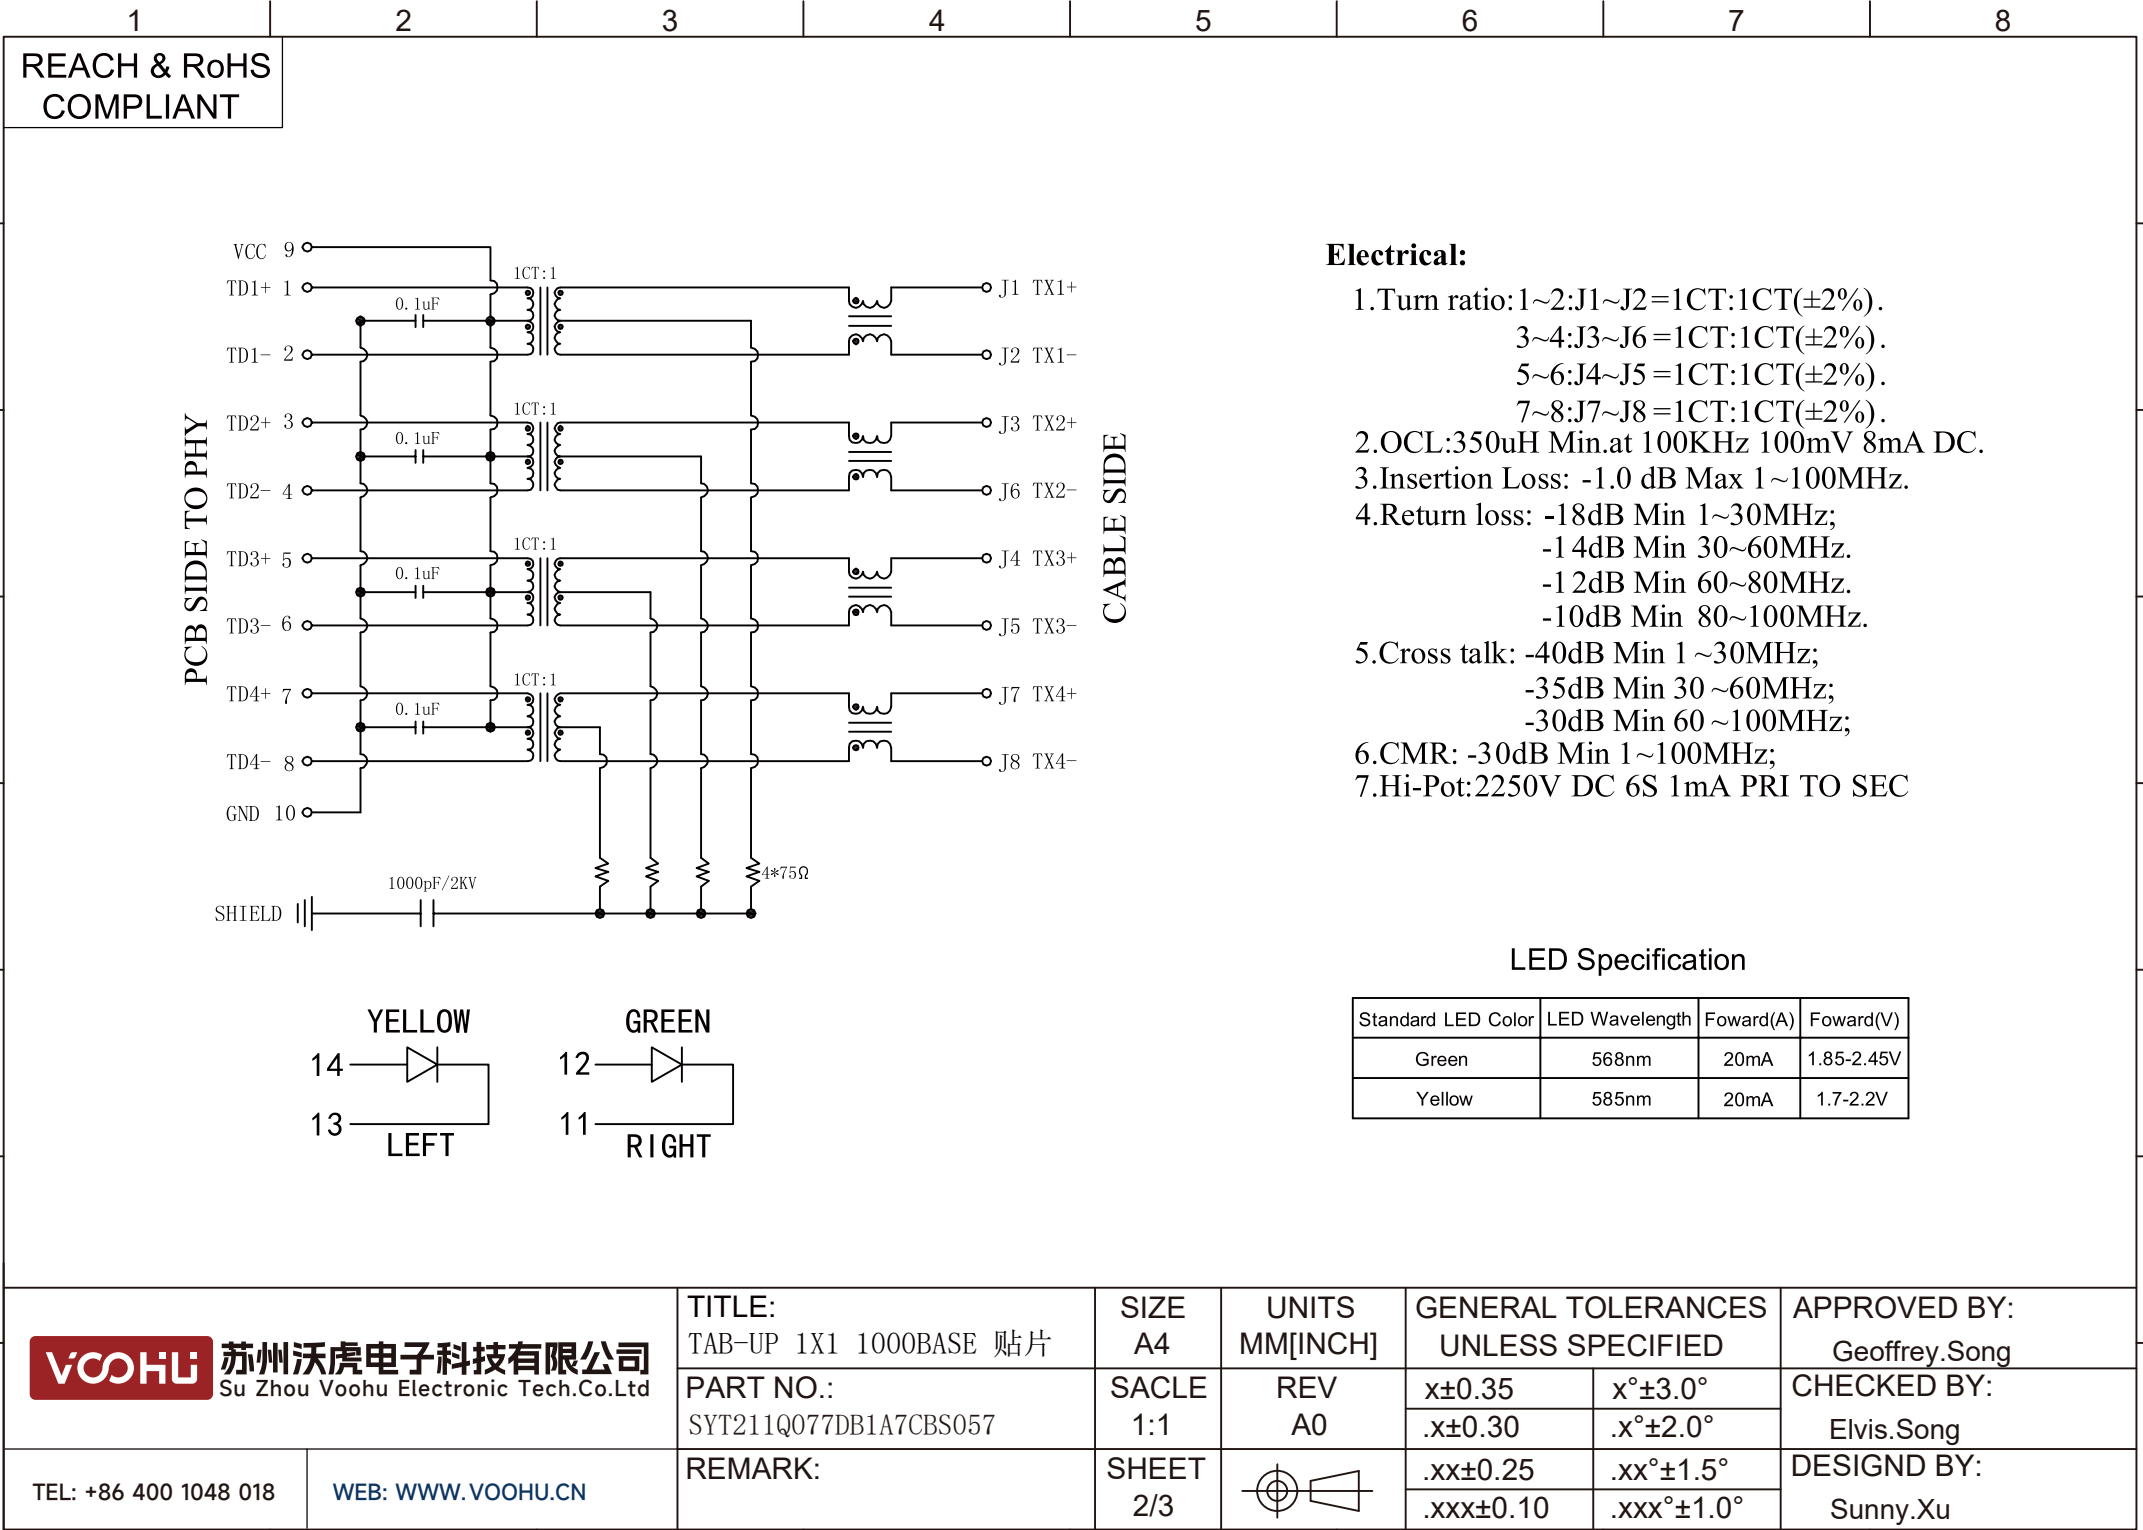

REACH & RoHS
COMPLIANT

PROFILE OF REFLOW SOLDERING

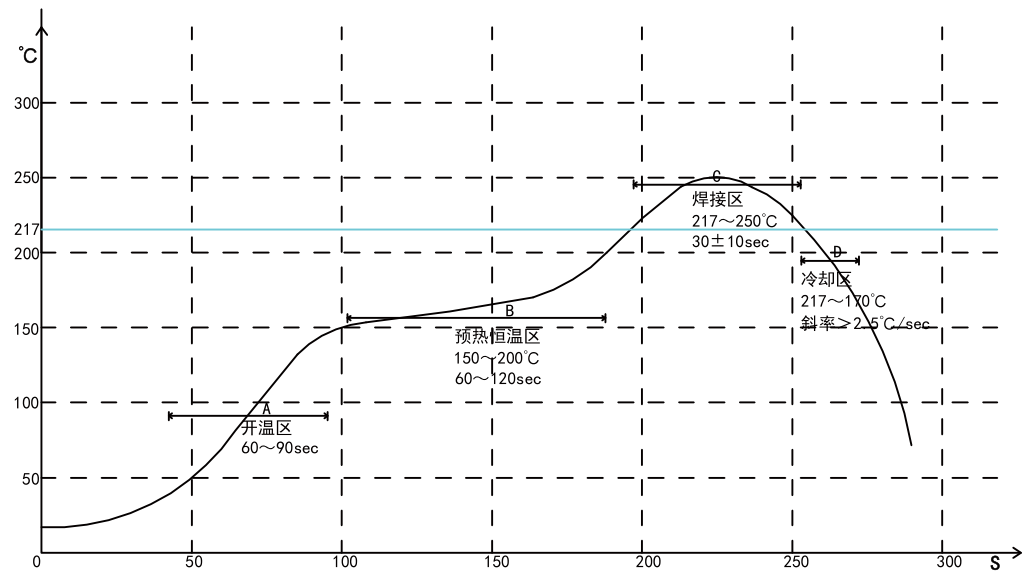

- A. Temperature range of open
 - B.Preheat temperature zone
 - C.The welding zone
 - D.The cooling zone
- Tip temperature:265±5°C.
Tip temperature time:30±10Sec.
Tip melting point of Sn96.5/Ag3/Cu0.5.

A	VOOHU 苏州沃虎电子科技有限公司 Su Zhou Voohu Electronic Tech.Co.Ltd		TITLE: TAB-UP 1X1 1000BASE 贴片	SIZE A4	UNITS MM[INCH]	GENERAL TOLERANCES UNLESS SPECIFIED		APPROVED BY: Geoffrey.Song	
			PART NO.: SYT211Q077DB1A7CBS057	SACLE 1:1	REV A0	.xx±0.35	x°±3.0°	CHECKED BY:	
	TEL: +86 400 1048 018		REMARK:	SHEET 3/3		.xx±0.25	.xx°±1.5°	DESIGND BY:	
	WEB: WWW.VOOHU.CN					.xxx±0.10	.xxx°±1.0°	Sunny.Xu	