REACH & RoHS COMPLIANT

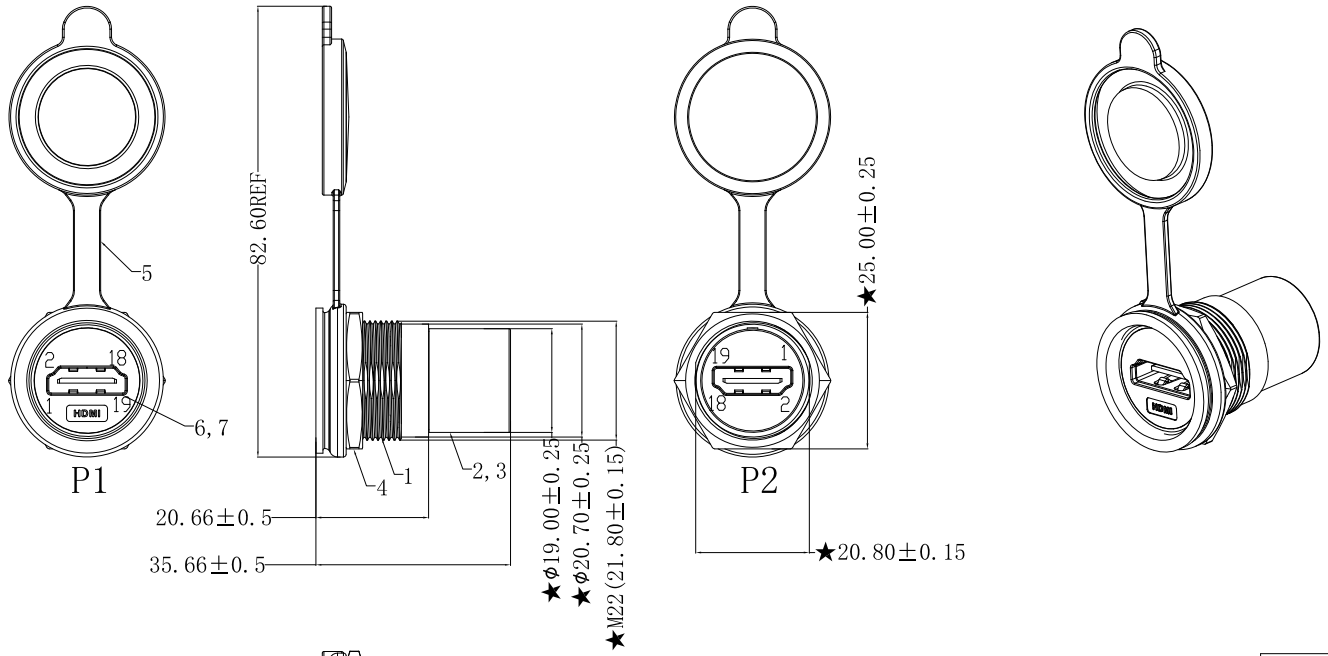



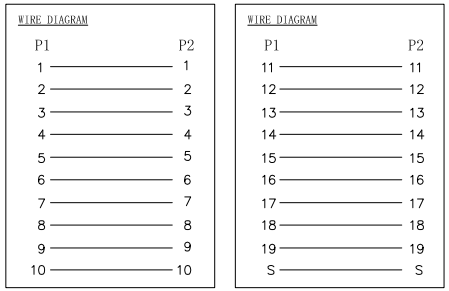



NOTES
1. VOLTAGE RATING: 125 VAC RMS.
2. CURRENT RATING: 1.5 AMP.
3. CONTACT RESISTANCE : 30mΩ MAX.
4. INSULATION RESISTANCE: 500MΩ MIN. AT 100V DC .
5. DIELECTRIC STRENGTH:300V AC OR 500V DC RMS AT 0.5mA 50Hz/60Hz FOR 1MINUTE.
6. The mark with ★ is the key inspection dimension for QC
7. Appearance: Free from discoloration, scratches, and other abnormalities.

NO.	TITLE	STANDARD	UNIT	QTY
7	PCB	PCB	pcs	1
6	CONN	HDMI AF 夹板式	pcs	2
5	硅胶	硅胶70度 黑色 防尘帽套	pcs	1
4	螺母	M22锌合金螺母	pcs	1
3	塑壳	M22锌合金内部塑壳 HDMI A母 单层下盖 PA66+30%GF 黑色 UL94-V0	pcs	1
2	塑壳	M22锌合金内部塑壳 HDMI A母 单层上盖 PA66+30%GF 黑色 UL94-V0	pcs	1
1	外壳	锌合金M22外壳 银色	pcs	1

VOOHU 苏州沃虎电子科技有限公司
Su Zhou Voohu Electronic Tech.Co.Ltd
TEL: +86 400 1048 018
WEB: WWW.VOOHU.CN

TITLE: M22锌合金 HDMI转接头 180度 异向 接地 带防尘帽	SIZE A4	UNITS MM[INCH]	GENERAL TOLERANCES UNLESS SPECIFIED	APPROVED BY: Geoffrey.Song
PART NO.: WHZJT020297	SCALE 1:1	REV A0	x±0.35 / x°±3.0° / .x±0.30 / .x°±2.0°	CHECKED BY: Elvis.Song
REMARK: 锌合金外壳银色	SHEET 1/1		.xx±0.25 / .xx°±1.5° / .xxx±0.10 / .xxx°±1.0°	DESIGNED BY: Sunny.Xu