


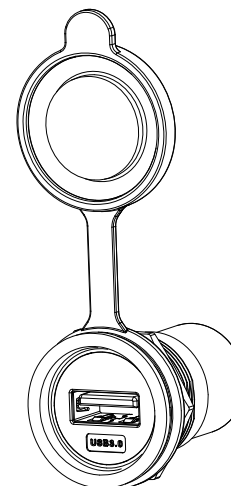
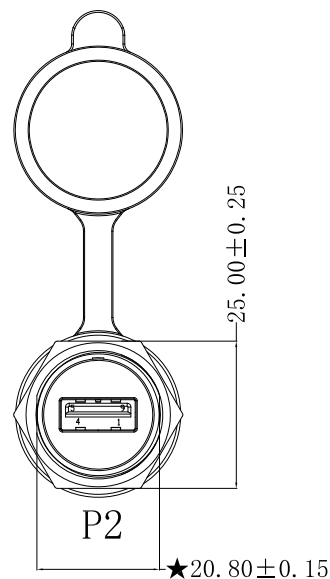
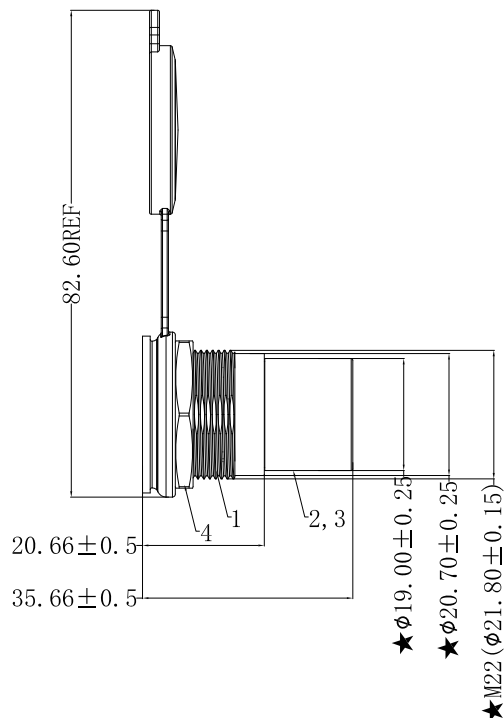


REACH & RoHS
COMPLIANT

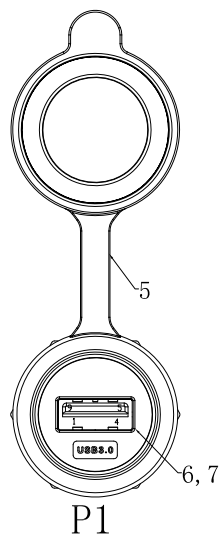

NOTES

1. VOLTAGE RATING: 125 VAC RMS.
2. CURRENT RATING: 1.5 AMP.
3. CONTACT RESISTANCE : 30mΩ MAX.
4. INSULATION RESISTANCE: 500MΩ MIN. AT 100V DC .
5. DIELECTRIC STRENGTH:300V AC OR 500V DC RMS AT 0.5mA 50Hz/60Hz FOR 1MINUTE.
6. The mark with ★ is the key inspection dimension for QC
- 7.Appearance: Free from discoloration, scratches, and other abnormalities.

WIRE DIAGRAM

P1	P2
1	1
2	2
3	3
4	4
5	8
6	9
7	7
8	5
9	6
S	S

7	PCB	PCB	pcs	1
6	USB	USB 母座	pcs	2
5	硅胶	硅胶70度 黑色 防尘帽套	pcs	1
4	螺母	M22锌合金螺母	pcs	1
3	塑壳	M22锌合金内部塑壳 USB 3.0 A母 单层下盖 PA66+30%GF 黑色 UL94-V0	pcs	1
2	塑壳	M22锌合金内部塑壳 USB 3.0 A母 单层上盖 PA66+30%GF 黑色 UL94-V0	pcs	1
1	外壳	锌合金M22外壳 银色	pcs	1
NO.	TITLE	STANDARD	UNIT	QTY

TITLE: M22锌合金 单层USB3.0
转接头 180度 接地 带防尘帽

SIZE
A4

UNITS
MM[INCH]

GENERAL TOLERANCES
UNLESS SPECIFIED

APPROVED BY:
Geoffrey.Song

PART NO.:
WHZJT020299

SCALE
1:1

REV
A0


x±0.35
.x±0.30

x°±3.0°
.x°±2.0°

CHECKED BY:
Elvis.Song

REMARK:
锌合金外壳银色

SHEET
1/1



.xx±0.25
.xxx±0.10

.xx°±1.5°
.xxx°±1.0°

DESIGNED BY:
Sunny.Xu

VOOHU 苏州沃虎电子科技有限公司
Su Zhou Voohu Electronic Tech.Co.Ltd

TEL: +86 400 1048 018

WEB: WWW.VOOHU.CN