
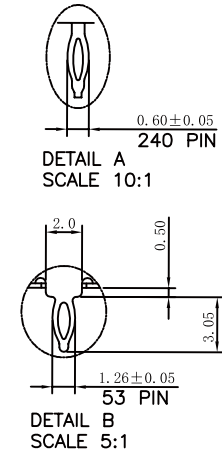
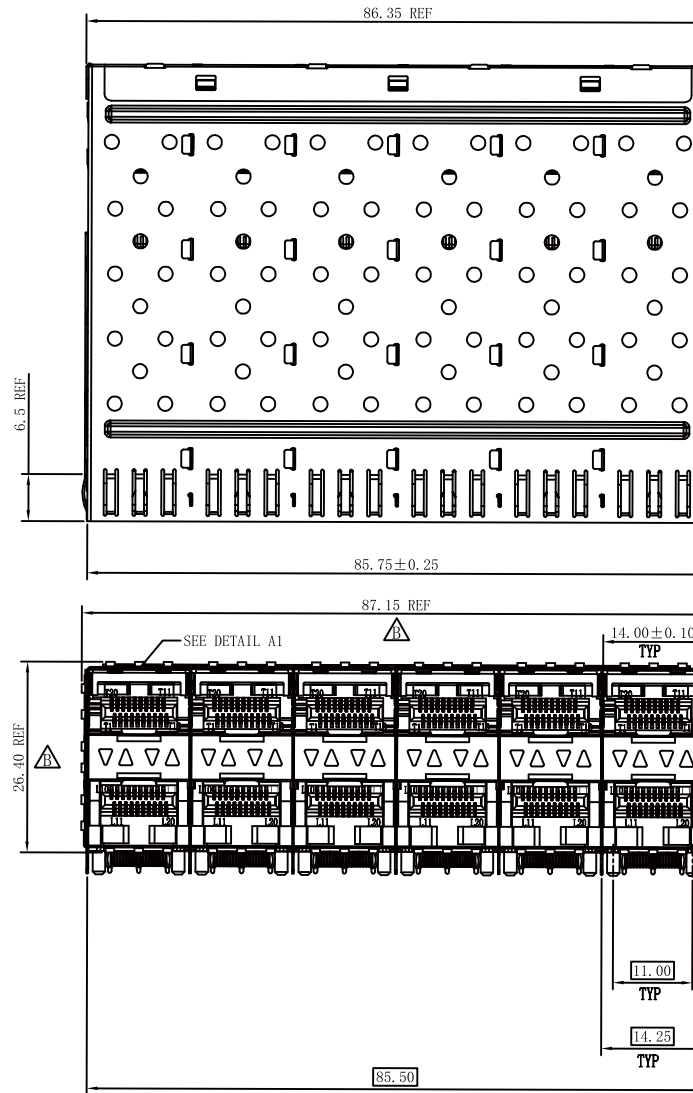


CUSTOMER DRAWING

- NOTE:
MATERIAL:
- CONTACT: PHOSPHOR BRONZE.
 - CONNECTOR HOUSING: LCP UL 94V-0. COLOR: BLACK.
 - MOULDED INSERT: HIGH TEMPERATURE PLASTIC UL 94V-0. COLOR:BLACK.
 - CAGE: COPPER ALLOY.
 - LIGHT PIPES: POLYCARBONATE. UL 94V-0. COLOR:CLEAR
 - LIGHT PIPE HOUSING: PBT UL 94V-0 COLOR:BLACK.
- PLATED:
- CONTACT MATING AREA : PLATING GOLD OVER 1.27 MICROMETERS MINIMUM NICKEL.
 - CONTACT NEEDLE EYE: 0.508 MICROMETERS MINIMUM MATTE TIN OVER 1.27 MICROMETERS MINIMUM NICKEL.
- MECHANICAL REQUIREMENT:
- DURABILITY: 100 CYCLES MIN.
 - INSERTION AND EXTRACTION FORCE: 40N MAX & 11.5N MAX
- ENVIRONMENTAL:
- LOW LEVEL CONTACT RESITANCE(LLCR):
ΔR 20 MILLIOHMS MAXIMUM FOR SHIELD AND SIGNAL CONTACTS.
 - DIELECTRIC WITHSTANDING VOLTAGE: 300V AC/MAX.
 - INSULATION RESISTANCE: 1x10⁹ OHMS MINIMUM.
 - RATINGS CURRENT: 0.5 AMPS MAX.
 - RATINGS VOLTAGE: 30 VOLTS DC/AC(RMS) MAX.
 - OPERATION: -40°C~+85°C.
 - STORAGE: -55°C~+105°C.
 - ROHS COMPLIANT

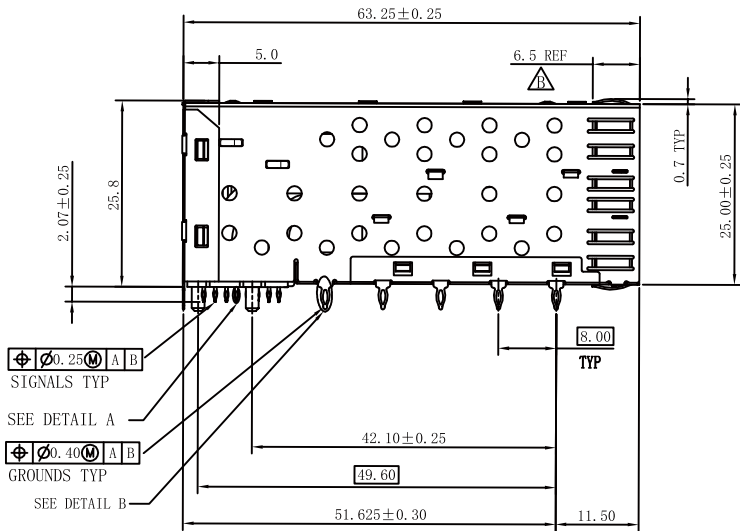

RoHS Compliant

VOOHU 苏州沃虎电子科技有限公司
Su Zhou Voohu Electronic Tech.Co.Ltd

TITLE:
SFP 2X6 CONNECTOR
PART NO.:
WHSFP06026F042

SIZE
A4
UNITS
MM[INCH]
SACLE
1:1
REV
A0

GENERAL TOLERANCES
UNLESS SPECIFIED

x±0.35	x°±3.0°
.x±0.30	.x°±2.0°
.xx±0.25	.xx°±1.5°
.xxx±0.10	.xxx°±1.0°

APPROVED BY:
Geoffrey.Song
CHECKED BY:
Elvis.Song
DESIGND BY:
Sunny.Xu

TEL: +86 400 1048 018



WEB: WWW.VOOHU.CN

REMARK:
gold plated 30u" Ni 30u" MIN


SHEET
1/4




CUSTOMER DRAWING

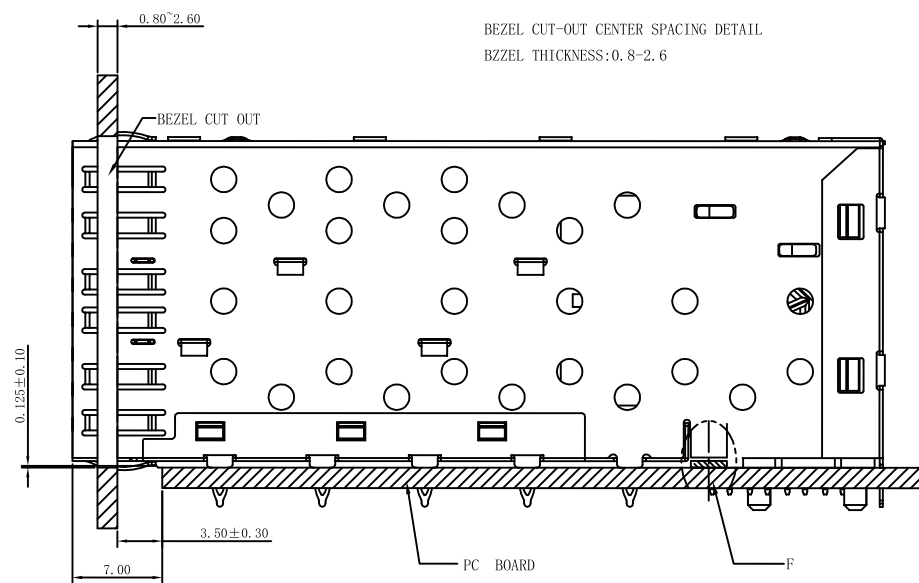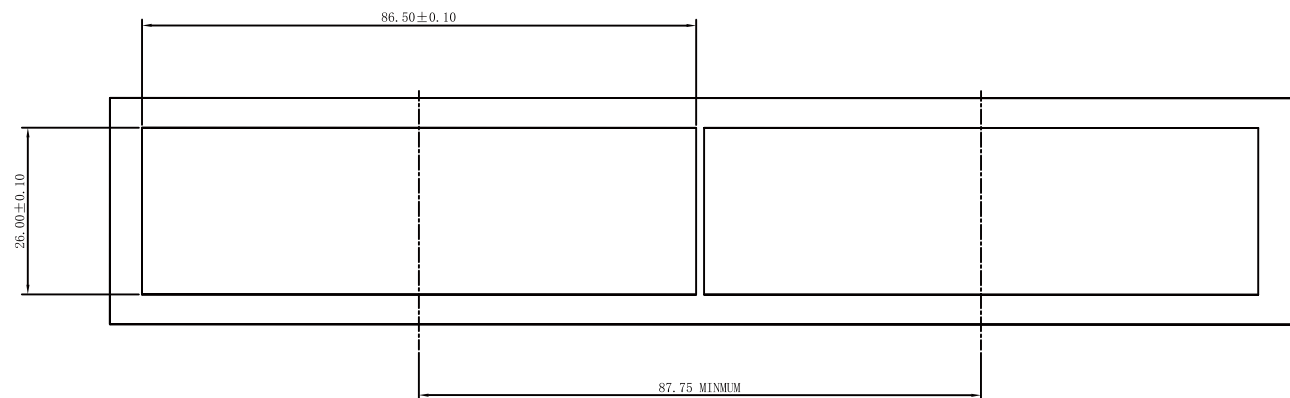

BEZEL CUT-OUT CENTER SPACING DETAIL
BZZEL THICKNESS:0.8~2.6



DETAIL F
SCALE 4:1

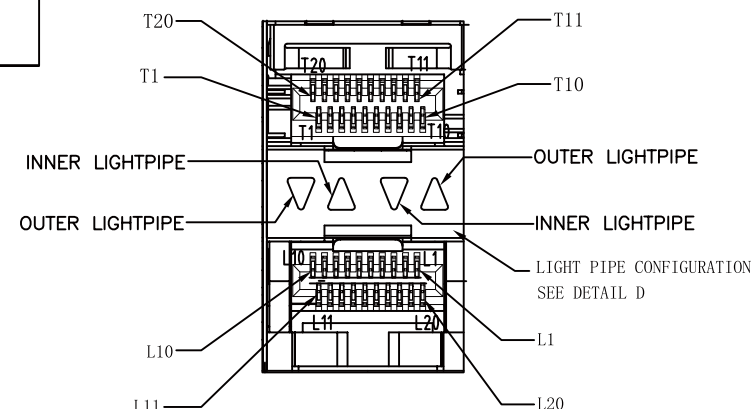

DETAIL A1
SCALE 4:1

RoHS Compliant

VOOHU 苏州沃虎电子科技有限公司
Su Zhou Voohu Electronic Tech.Co.Ltd

TEL: +86 400 1048 018

WEB: WWW.VOOHU.CN

TITLE:
SFP 2X6 CONNECTOR

PART NO.:
WHSFP06026F042

REMARK:
gold plated 30u" Ni 30u" MIN


SIZE
A4

SACLE
1:1

SHEET
2/4

UNITS
MM[INCH]

REV
A0



GENERAL TOLERANCES
UNLESS SPECIFIED


$x \pm 0.35$
 $.x \pm 0.30$
 $.xx \pm 0.25$
 $.xxx \pm 0.10$

$x^\circ \pm 3.0^\circ$
 $.x^\circ \pm 2.0^\circ$
 $.xx^\circ \pm 1.5^\circ$
 $.xxx^\circ \pm 1.0^\circ$

APPROVED BY:
Geoffrey.Song



CHECKED BY:
Elvis.Song

DESIGND BY:
Sunny.Xu

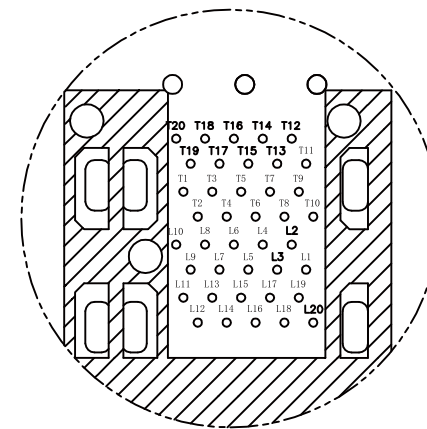

DESIGND BY:	Sunny.Xu
-------------	----------

CUSTOMER DRAWING

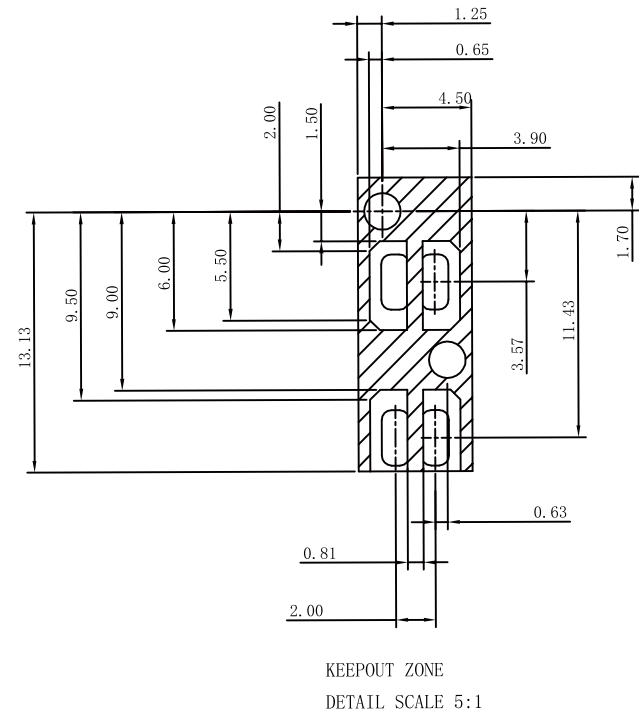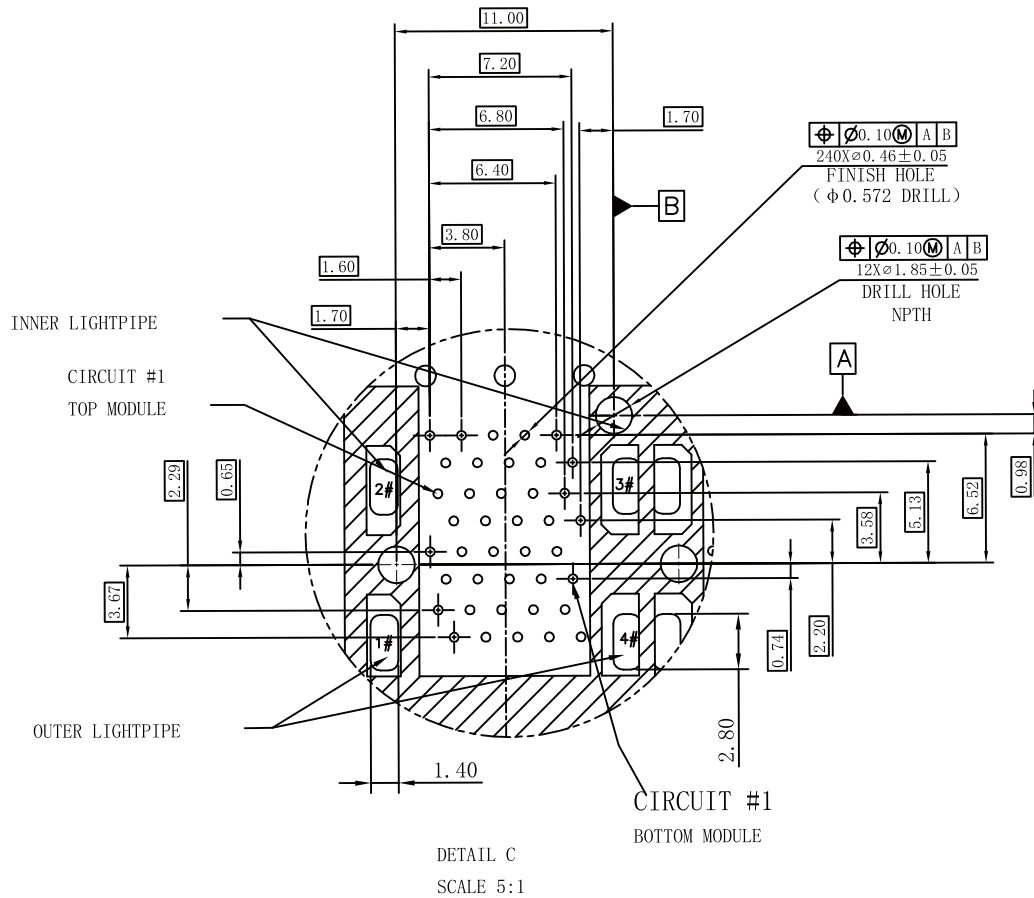

RoHS Compliant



苏州沃虎电子科技有限公司
Su Zhou Voohu Electronic Tech.Co.Ltd

TITLE:
SFP 2X6 CONNECTOR

SIZE
A4

UNITS
MM[INCH]

GENERAL TOLERANCES
UNLESS SPECIFIED

APPROVED BY:
Geoffrey.Song

PART NO.:
WHSFP06026F042

SACLE
1:1

REV
A0


$x \pm 0.35$
 $.x \pm 0.30$

$x^\circ \pm 3.0^\circ$
 $.x^\circ \pm 2.0^\circ$

CHECKED BY:
Elvis.Song

REMARK:
gold plated 30u" Ni 30u" MIN

SHEET
4/4



$.xx \pm 0.25$
 $.xxx \pm 0.10$

$.xx^\circ \pm 1.5^\circ$
 $.xxx^\circ \pm 1.0^\circ$

DESIGND BY:
Sunny.Xu

TEL: +86 400 1048 018

WEB: WWW.VOOHU.CN