
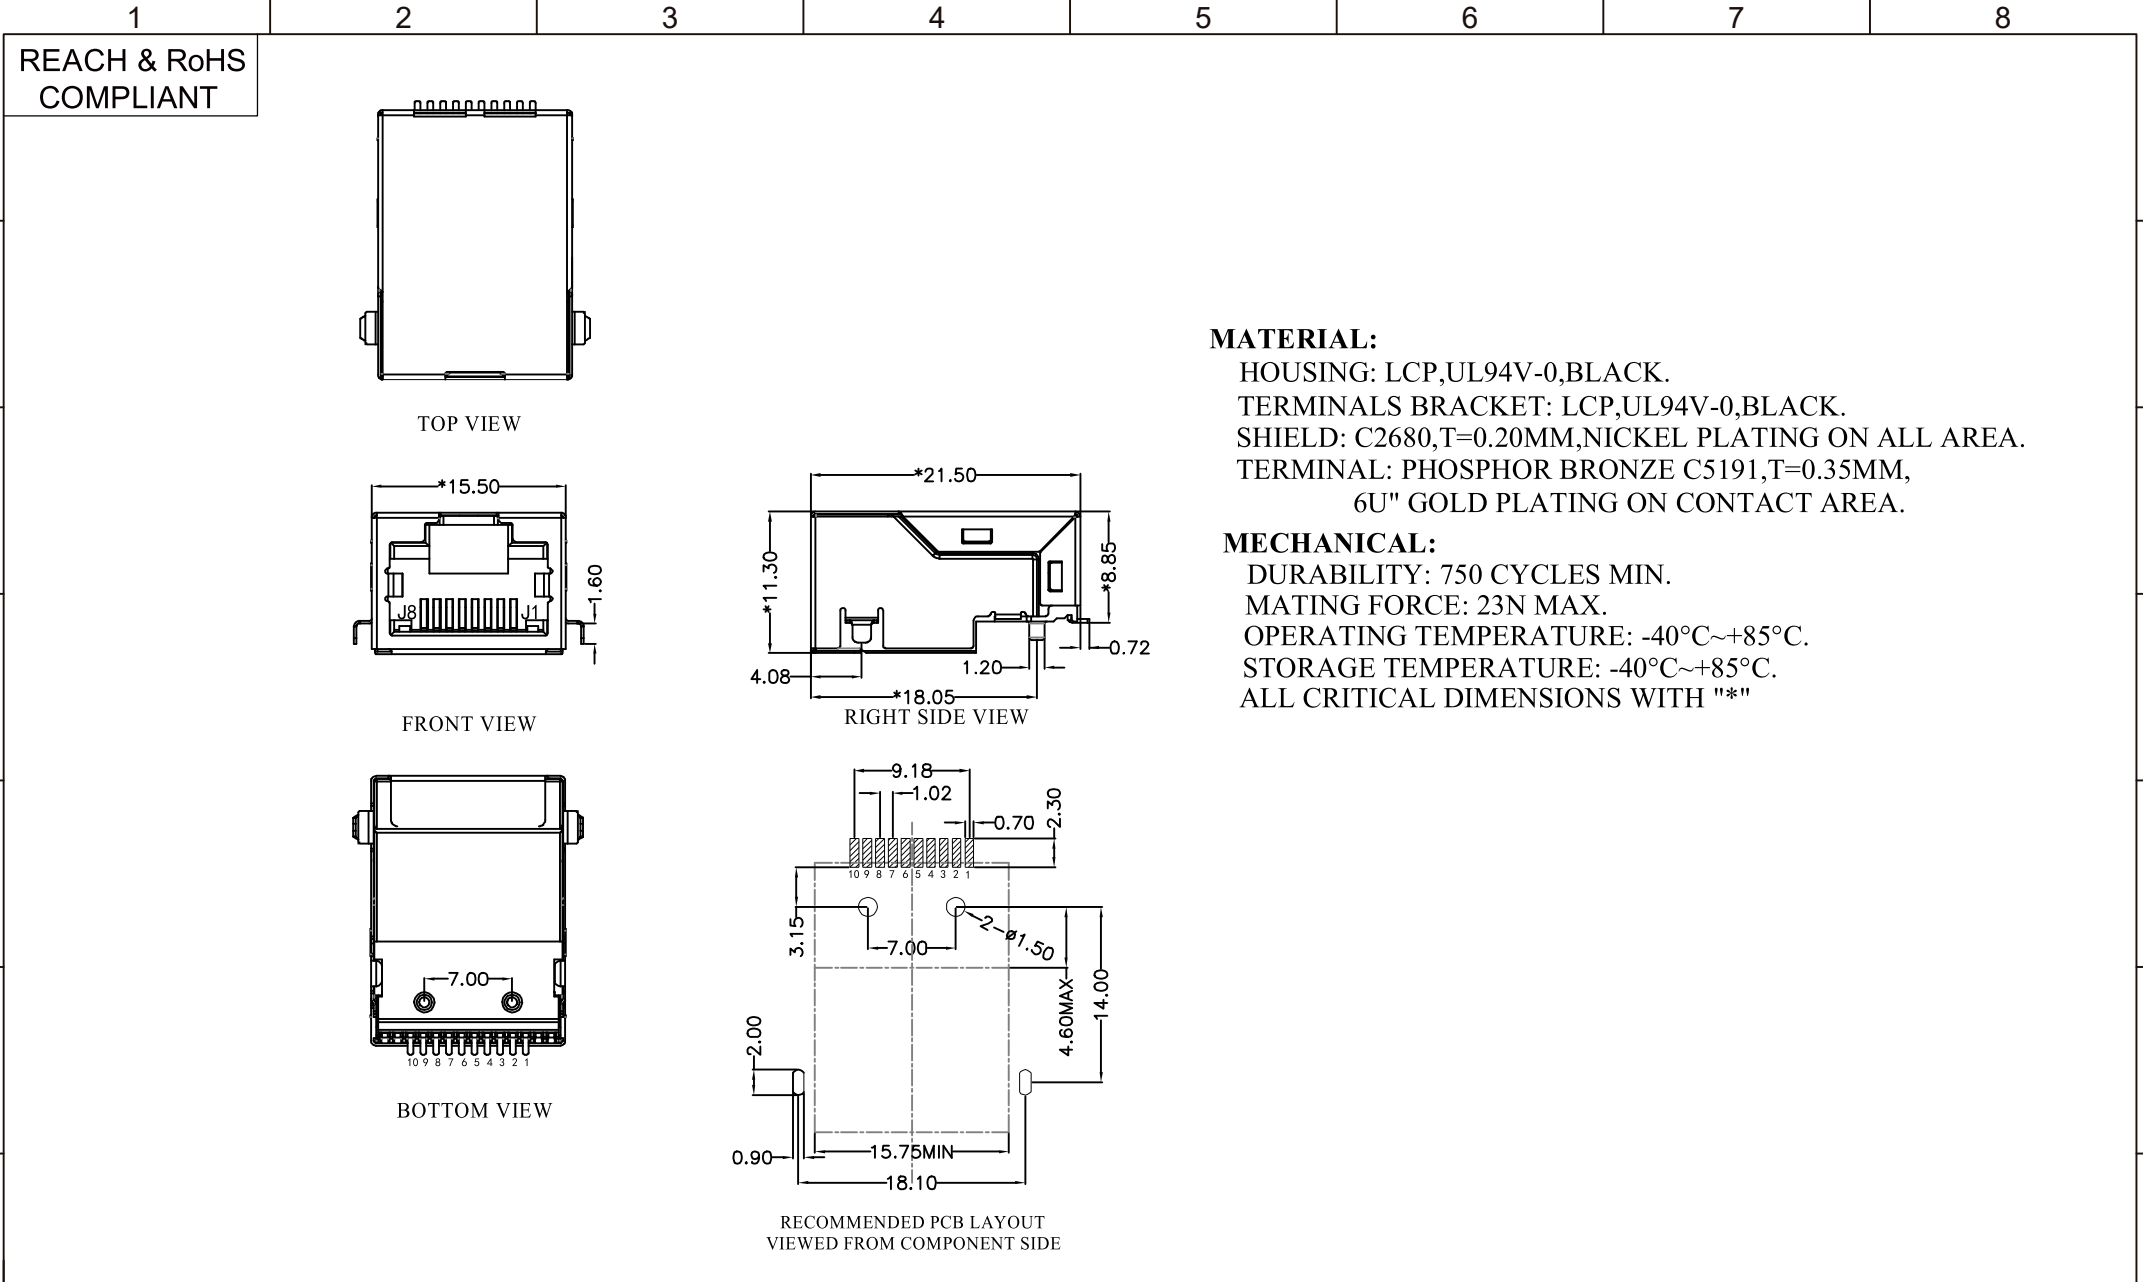




MATERIAL:
HOUSING: LCP,UL94V-0,BLACK.
TERMINALS BRACKET: LCP,UL94V-0,BLACK.
SHIELD: C2680,T=0.20MM,NICKEL PLATING ON ALL AREA.
TERMINAL: PHOSPHOR BRONZE C5191,T=0.35MM,
6U" GOLD PLATING ON CONTACT AREA.

MECHANICAL:
DURABILITY: 750 CYCLES MIN.
MATING FORCE: 23N MAX.
OPERATING TEMPERATURE: -40°C~+85°C.
STORAGE TEMPERATURE: -40°C~+85°C.
ALL CRITICAL DIMENSIONS WITH "*"

VOOHU 苏州沃虎电子科技有限公司 Su Zhou Voohu Electronic Tech.Co.Ltd		TITLE: TAB-UP 1X1 100BASE	SIZE A4	UNITS MM[INCH]	GENERAL TOLERANCES UNLESS SPECIFIED		APPROVED BY: Geoffrey.Song
		PART NO.: SYT211B488GWA7CBST6359	SCALE 1:1	REV A0	x±0.35	x°±3.0°	CHECKED BY:
		REMARK: POE 贴片	SHEET 1/4		.x±0.30	.x°±2.0°	Elvis.Song
TEL: +86 400 1048 018		WEB: WWW.VOOHU.CN			.xx±0.25	.xx°±1.5°	DESIGNED BY:
					.xxx±0.10	.xxx°±1.0°	Sunny.Xu

1

2

3

4

5

6

7

8

REACH & RoHS
COMPLIANT

Suggested Panel Opening:

METAL PANEL

PCB

UNIT: mm / inch
Tolerances: ±0.10 / 0.004

Keep-Out Area (Component Side View):

Plug In Side

UNIT: mm / inch
Tolerances: ±0.10 / 0.004

A	VOOHU 苏州沃虎电子科技有限公司 Su Zhou Voohu Electronic Tech.Co.Ltd		TITLE: TAB-UP 1X1 100BASE		SIZE A4	UNITS MM[INCH]	GENERAL TOLERANCES UNLESS SPECIFIED		APPROVED BY: Geoffrey.Song	
			PART NO.: SYT211B488GWA7CBST6359		SCALE 1:1	REV A0	x±0.35	x°±3.0°	CHECKED BY:	
	TEL: +86 400 1048 018 WEB: WWW.VOOHU.CN		REMARK: POE 贴片		SHEET 2/4		.xx±0.25	.xx°±1.5°	DESIGNED BY:	
							.xxx±0.10	.xxx°±1.0°	Sunny.Xu	

1	2	3	4	5	6	7	8		
REACH & RoHS COMPLIANT									
PROFILE OF REFLOW SOLDERING									
					A. Temperature range of open B.Preheat temperature zone C.The welding zone D.The cooling zone Tip temperature:265±5°C. Tip temperature time:30±10Sec. Tip melting point of Sn96.5/Ag3/Cu0.5.				
苏州沃虎电子科技有限公司 Su Zhou Voohu Electronic Tech.Co.Ltd		TITLE: TAB-UP 1X1 100BASE		SIZE A4	UNITS MM[INCH]	GENERAL TOLERANCES UNLESS SPECIFIED		APPROVED BY: Geoffrey.Song	
		PART NO.: SYT211B488GWA7CBST6359		SCALE 1:1	REV A0	x±0.35 .x±0.30	x°±3.0° .x°±2.0°	CHECKED BY: Elvis.Song	
		REMARK: POE 贴片		SHEET 4/4		.xx±0.25 .xxx±0.10	.xx°±1.5° .xxx°±1.0°	DESIGNED BY: Sunny.Xu	
TEL: +86 400 1048 018		WEB: WWW.VOOHU.CN							
1	2	3	4	5	6	7	8		