

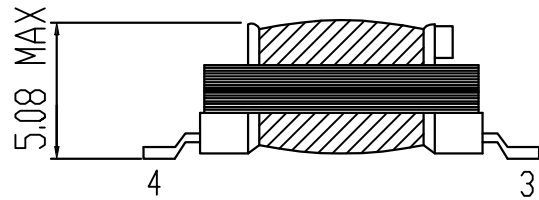
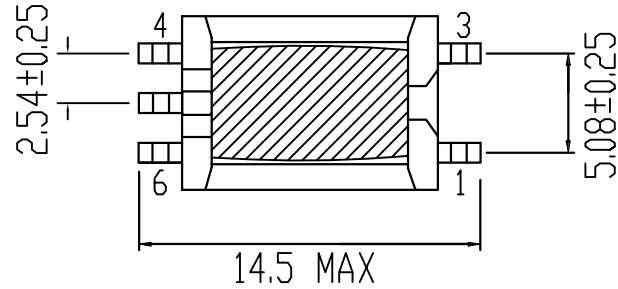


REACH & RoHS
COMPLIANT

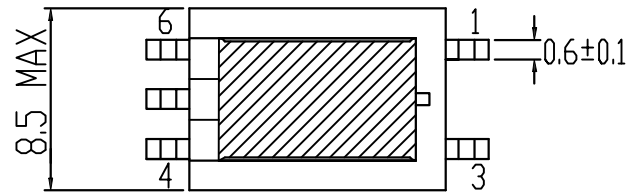

“•” PHASE POINT

ELECTRICAL CHARACTERISTICS:

- 1.DCR:
 - PIN3-1=90.5 OHM±10%
 - PIN4-5=112 OHM±10%
 - PIN6-5=102 OHM±10%
- 2.INDUCTANCE:1KHz,0.3Vrms
 - PIN1-3=720mH+25%-15%
- 3.TURN RATIO:1KHz,0.3Vrms
 - PIN3-1:6-5=1.0±1%
 - PIN3-1:4-5=1.0±1%
- 4.HI-POT:
 - 500Vac,1mA,1sec
 - PIN1-3 TO PIN6-4
- 5.ROHS COMPLIANT

VOOHU 苏州沃虎电子科技有限公司
Su Zhou Voohu Electronic Tech.Co.Ltd

TITLE:
Audio Transformer

SIZE
A4
UNITS
MM[INCH]

GENERAL TOLERANCES
UNLESS SPECIFIED

APPROVED BY:
Geoffrey.Song

PART NO.:
WHTT5002

SACLE
1:1
REV
A0

$x \pm 0.35$
 $.x \pm 0.30$

CHECKED BY:
Elvis.Song

TEL: +86 400 1048 018

WEB: WWW.WOHU-TEK.COM

REMARK:

SHEET
1/1



$.xx \pm 0.25$
 $.xxx \pm 0.10$

DESIGND BY:
Sunny.Xu