


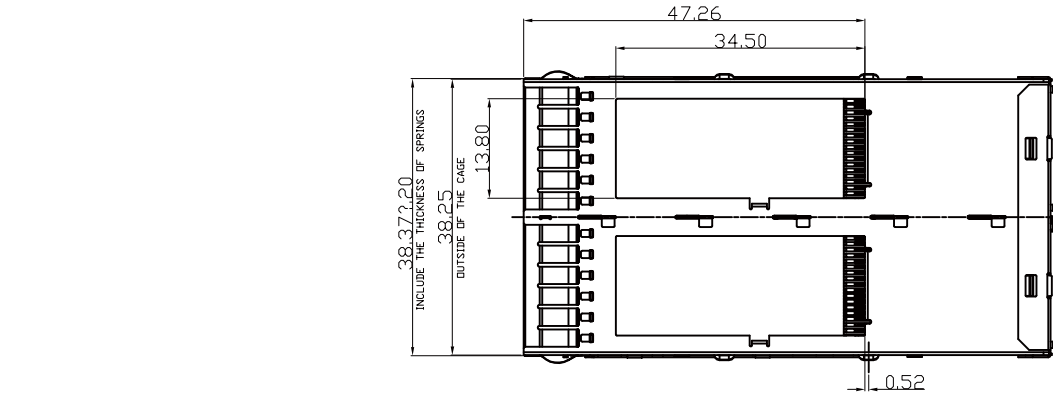


CUSTOMER DRAWING

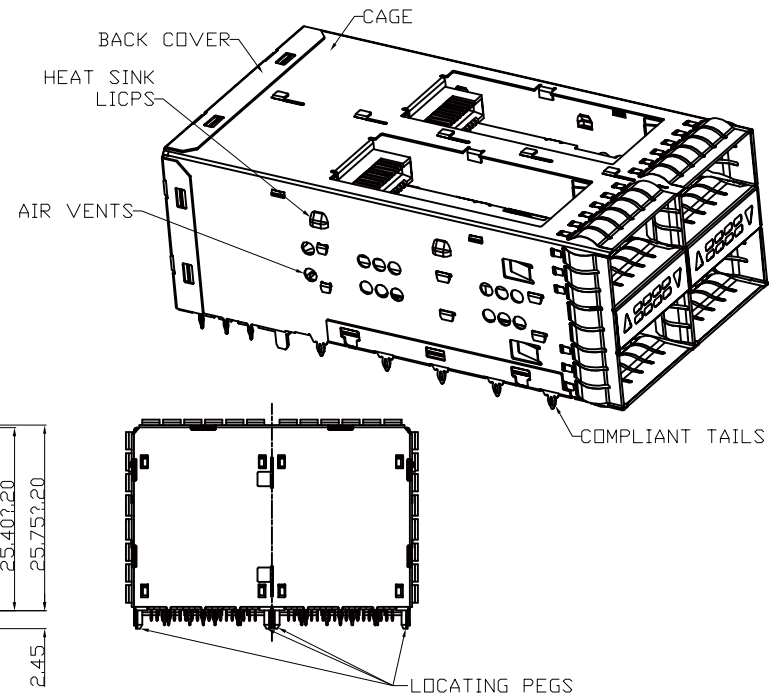


OPTIONAL
LIGHTPIPE
INDICATORS

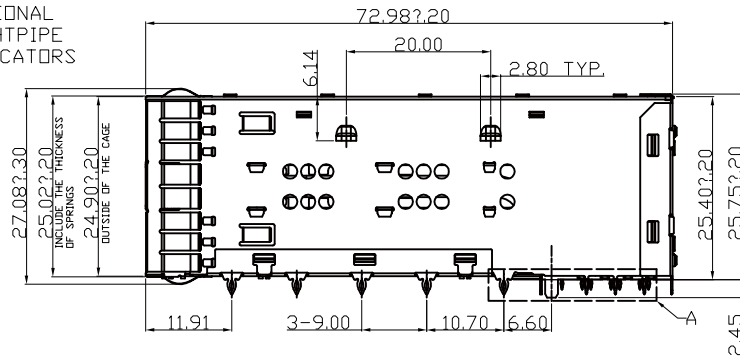

NOTES:

- MATERIAL:
CAGE: COPPER ALLOY,THICKNESS:0.25mm;
EMI SPRING FINGERS: BERYLLIUM COPPER,THICKNESS:0.06mm REF;
LIGHT PIPES: POLYCARBONATE;
CONNECTOR HOUSING: GLASS FILED THERMOPLASTIC,UL:94V-0,COLOR:BLACK;
TERMINALS: HIGH PERFORMANCE COPPER ALLOY.
- FINISH:
CAGE: 0.762-1.27um NICKLE OVERALL;
EMI SPRING FINGERS: 1.27-2.032um NICKLE OVERALL;
TERMINALS: 0.762um Min GOLD PLATING OVER NICKLE IN CONTACT AREA;
COMPLIANT TAIL: 2.54-3.556um TIN OVER NICKLE.
- PACKAGING:
PRODUCT PACKEAGED IN TRAYS AND CARTONS.

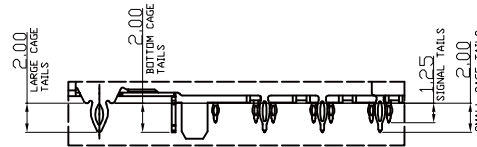

DETAIL A
SCALE 2:1

LIGHTPIPE STYLE TABLE



LEFT UP RIGHT DOWN
LIGHTPIPE INDICATORS

RoHS Compliant

VOOHU 苏州沃虎电子科技有限公司
Su Zhou Voohu Electronic Tech.Co.Ltd

TITLE:
QSFP+ 2X2 ASSMBLY

PART NO.:
WHSFP28422F002

REMARK:


SIZE
A4

SACLE
1:1

SHEET
1/2

UNITS
MM[INCH]

REV
A0



GENERAL TOLERANCES
UNLESS SPECIFIED

$x \pm 0.35$
 $.x \pm 0.30$
 $.xx \pm 0.25$
 $.xxx \pm 0.10$

APPROVED BY:
Geoffrey.Song

CHECKED BY:
Elvis.Song

DESIGND BY:
Sunny.Xu

TEL: +86 400 1048 018

WEB: WWW.VOOHU.CN

