

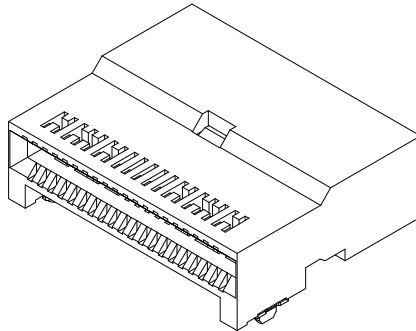
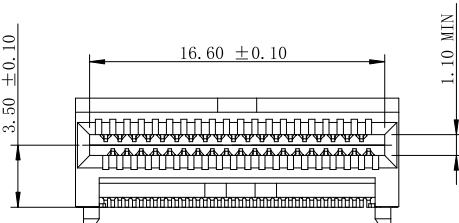
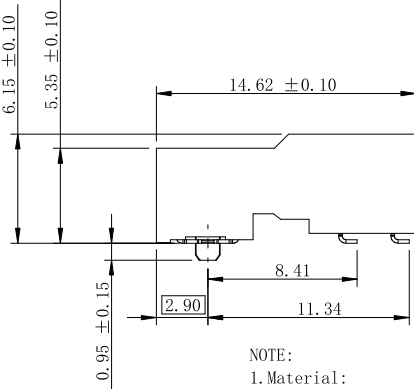
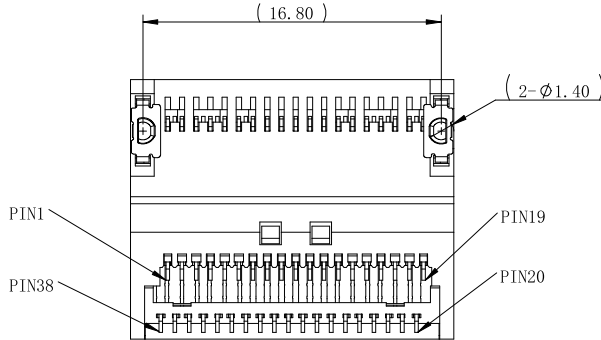

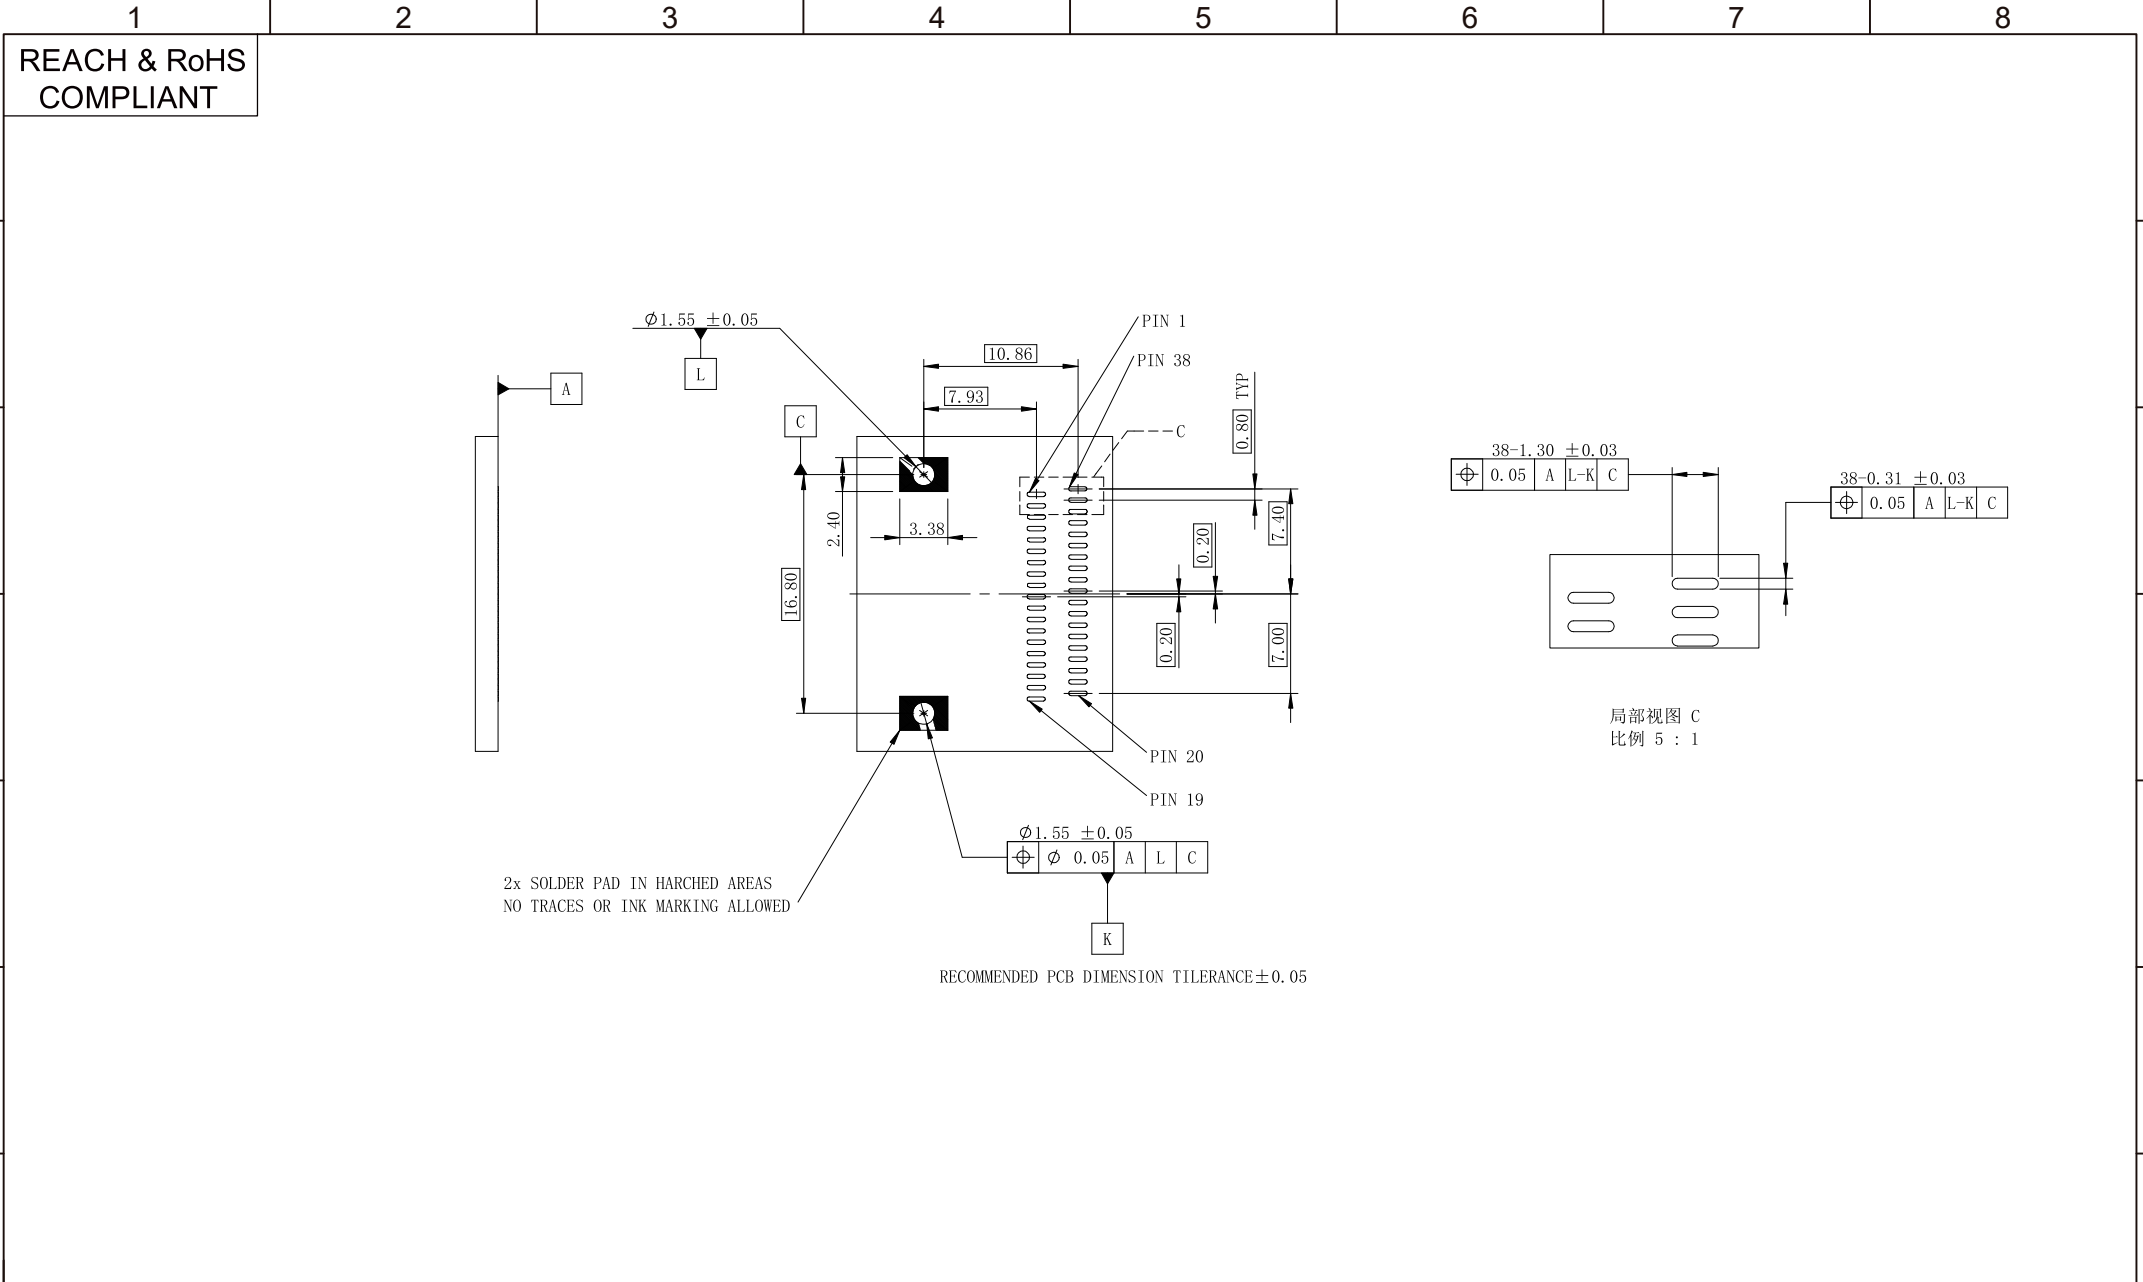


1	2	3	4	5	6	7	8	
REACH & RoHS COMPLIANT								
								
								
		NOTE: 1. Material: HOUSING: HIGH TEMPERATURE LCP, BLACK, UL 94 V-0 FLAME RETARDANT. 2. TERMINAL : NICKEL COPPER ALLOY PLATING SPEC AS BELOW: OPTION 1 CONTACT AREA PLATE NICKEL 1.27um MIN, PLATE Gold 0.38um MIN SOLDER AREA PLATE NICKEL 1.27um MIN, PLATE MATT TIN 1.5~4.5um OPTION 2 CONTACT AREA PLATE NICKEL 1.27um MIN, PLATE Gold 0.76um MIN SOLDER AREA PLATE NICKEL 1.27um MIN, PLATE MATT TIN 1.5~4.5um 3. ELECTRICAL CHARACTERISTICS CONTACT CURRENT RATING:1.5AMPERE VOLTAGE RATING:30V DC CONTACT RESISTACE:50 MILLOHMS MAX DIELECTRIC WITHSTANDING VOLTAGE:300V AC 4. ENVIRONMEENT OPERATION TEMPERATURE:-40° C TO 85° C						
 苏州沃虎电子科技有限公司 Su Zhou Voohu Electronic Tech.Co.Ltd		TITLE: QSFP112 1X1 CONNECTOR		SIZE A4	UNITS MM[INCH]	GENERAL TOLERANCES UNLESS SPECIFIED		APPROVED BY: Geoffrey.Song
		PART NO.: WHSFP51311F002		SCALE 1:1	REV A0	x±0.35 .x±0.30	x°±3.0° .x°±2.0°	CHECKED BY: Elvis.Song
		REMARK: 0.8PITCH GOLD PLATING:0.76um		SHEET 1/2		.xx±0.25 .xxx±0.10	.xx°±1.5° .xxx°±1.0°	DESIGNED BY: Sunny.Xu
1	2	3	4	5	6	7	8	

	1	2	3	4	5	6	7	8
H	REACH & RoHS COMPLIANT							
G								
F								
E								
D								
C								
B								
A								
	1	2	3	4	5	6	7	8

	1	2	3	4	5	6	7	8
H	REACH & RoHS COMPLIANT							
G								
F								
E								
D								
C								
B								
A								
	1	2	3	4	5	6	7	8



 苏州沃虎电子科技有限公司 Su Zhou Voohu Electronic Tech.Co.Ltd	TITLE: QSFPI12 1X1 CONNECTOR		SIZE A4	UNITS MM[INCH]	GENERAL TOLERANCES UNLESS SPECIFIED		APPROVED BY: Geoffrey.Song
	PART NO.: WHSFP51311F002		SCALE 1:1	REV A0	x ± 0.35 .x ± 0.30	x $^{\circ} \pm 3.0^{\circ}$.x $^{\circ} \pm 2.0^{\circ}$	CHECKED BY: Elvis.Song
	REMARK: 0.8PITCH GOLD PLATING:0.76um		SHEET 2/2		.xx ± 0.25 .xxx ± 0.10	.xx $^{\circ} \pm 1.5^{\circ}$.xxx $^{\circ} \pm 1.0^{\circ}$	DESIGNED BY: Sunny.Xu